

SWITCH CHARACTERISTICS

REST POSITION-----.730 TO .790
 OPERATING POSITION-----.610 TO .710
 PRETRAVEL-----.125 MAX.
 OVERTRAVEL-----.100 MIN.
 MOVEMENT DIFFERENTIAL-----.045 MAX.
 OPERATING FORCE-----.425 MAX.

OPERATING CHARACTERISTICS
 TAKEN AT BUTTON.

SPST- MOMENTARY ACTION

SWITCHING: SINGLE POLE DOUBLE THROW
 MOMENTARY ACTION

CHEAT INTERLOCK CHARACTERISTICS

OPERATING POSITION---.800 TO .900
 PRETRAVEL-----.125 MAX.
 OVERTRAVEL-----.050 MIN.
 MOVEMENT DIFFERENTIAL-----.060 MAX.
 OPERATING FORCE-----.283 MAX.





ELECTRICAL RATING

10 AMPS 125/250 VAC
 1/3 H.P. 125/250 VAC

U.L. RECOGNIZED C.S.A. CERTIFIED.
 VDE APPROVED

QUICK CONNECT TERMINALS
 .187 WIDE X .020 THK.

COLORS:
 FACEPLATE-WHITE
 BUTTON-WHITE

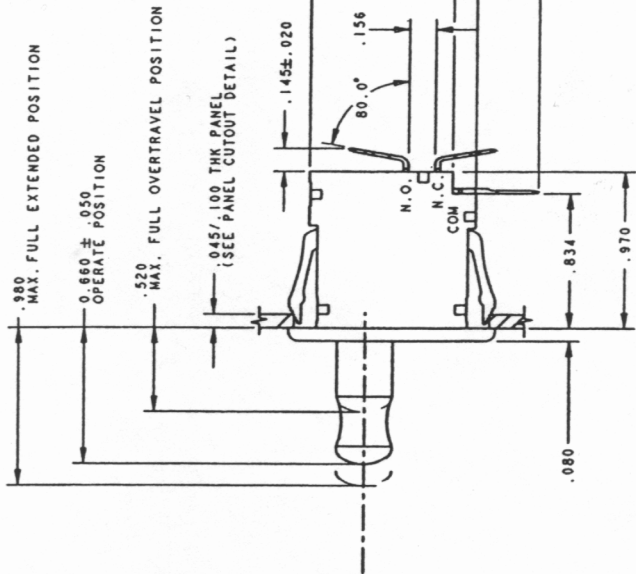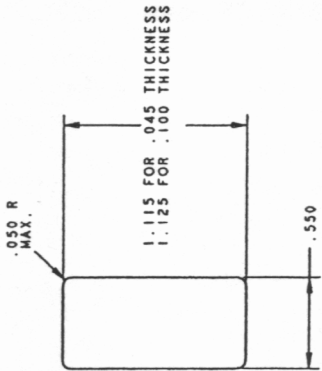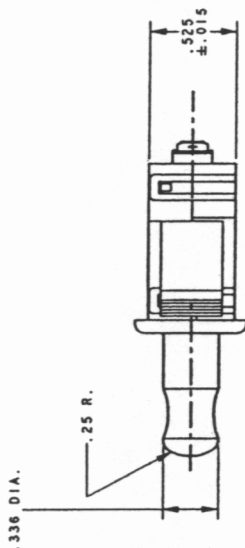

PRELIMINARY

DATE: 26-Dec-82

CHERRYBOND
 ELECTRICAL PRODUCTS
 2400 SUMMIT AVENUE
 BURGESS, IL 60401

SPEC DRAWING

ITEM NO. F6965A

SCALE: 2

SH 1 OF 1

THE CONFIDENTIAL AND PROPRIETARY INFORMATION CONTAINED HEREIN IS OWNED BY CHERRYBOND ELECTRICAL PRODUCTS. NO PART OF THIS DOCUMENT IS TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT PERMISSION IN WRITING FROM CHERRYBOND ELECTRICAL PRODUCTS.

TOLERANCE UNLESS SPECIFIED

FINISH UNLESS SPECIFIED

DATE: 26-Dec-82 JED RC PREP APVD

REV ECH NO. DATE PREP APVD