

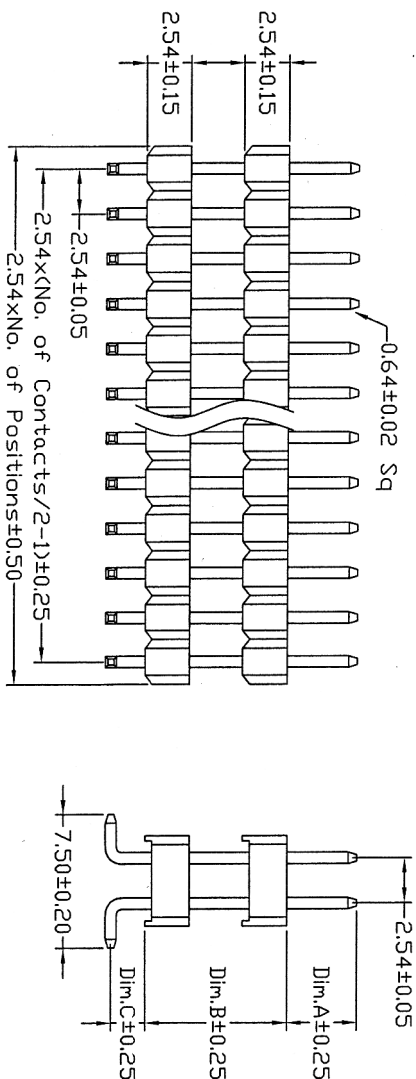


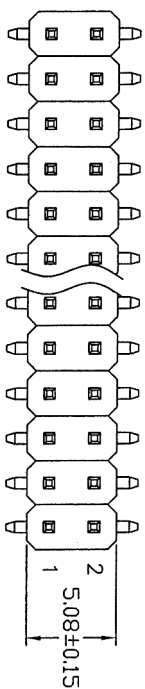

Current rating: 1.5A
 Insulator resistance: 1000Mohm min.
 Contact resistance: 20mOhm min.
 Dielectric withstanding: AC 500V / minute
 Operating temperature: -40°C ~ +105°C
 Contact material: Brass
 Insulator material: Nylon-6T, UL94V-0, Black
 Finish: Full gold flash plated

Dim. A : 6mm
 Dim. B+C : 10mm



RECOMMENDED P.C.B. LAYOUT

0.0 ±0.38
 0.00 ±0.25

ASSMANN
 WSW Components

P/N
 A-DSL-DG-G10SM-6/10

Drawing-No.

ASS 1926 CO

Sheet
 1/1

Replace

Sheet

	1	2	3	4	5	6	7	
A								A
B								B
C								C
D								D
E								E
F								F
G								G
H	1	2	3	4	5	6	7	H