


18"

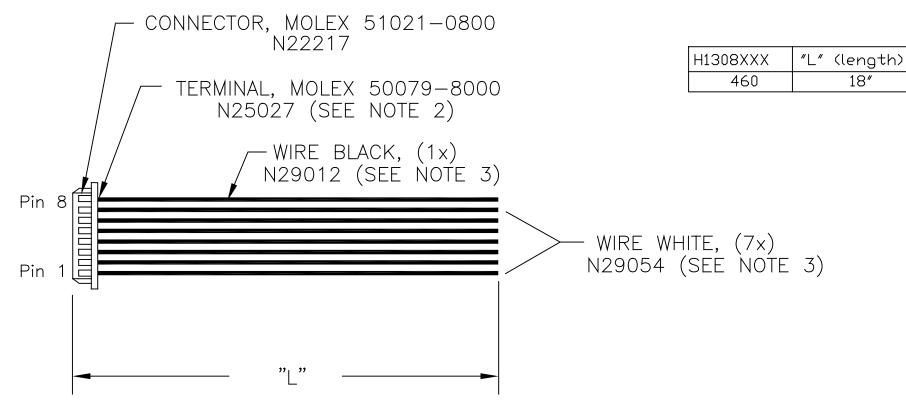

NOTES:

- 1. ALL WIRING MUST HAVE A FLAMIBILITY RATING EQUIVALENT TO UL-94V1 AND AN APPROPRIATE UL STYLE NUMBER
- 2. CABLE INSULATION TO BE CAPTIVATED BY CRIMP TERMINAL, SEE ATTACHED DRAWINGS FOR ACCEPTABILITY.
- 3. WIRES TO BE 26 AWG, MIL STD W16878 TYPE B (BELDEN #8504 OR EQUIVELANT) IN COLORS LISTED.
- 4. USE CABLE TIE N22211 FOR FACH HARNESS, ATTACH TIE AND CLIP EXCESS FLUSH LEAVING NO SHARP EDGE.

			APPROVALS DATE		DATE	ENDICOTT RESEARCH GROUP, INC. 2601 WAYNE ST., ENDICOTT, NY 13760 607-754-9187		
		MATERIAL	DRAWN CHECKED	CC	10/26/01 10/26/01	WIRING HARNESS H1308		
			APPROVED		10/26/01	C DRAWING NUMBER	H1308	REV.
		DO NOT SCALE				SCALE	SHEET 1 OF 1	