

**NOTES:**

**MATERIAL**





- 1. Insulator Material: PBT +30%GF(UL94V-0)
- 2. Contact Material : Brass
- 3. Contact Plating : Gold flash Over Ni

**ELECTRICAL**

- 1. Current Rating : 1.5AMP
- 2. Withstand Voltage : 500V AC/DC
- 3. Contact Resistance : 20mΩ max
- 4. Insulation Resistance: 1000MΩ min

**ENVIRONMENTAL**

- 1. Operation Temperature: -40°C to +105°C
- 2. Packing : PE Bag

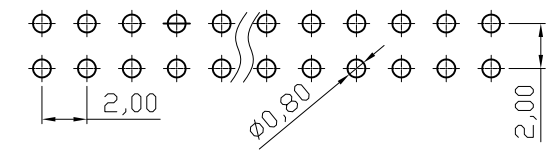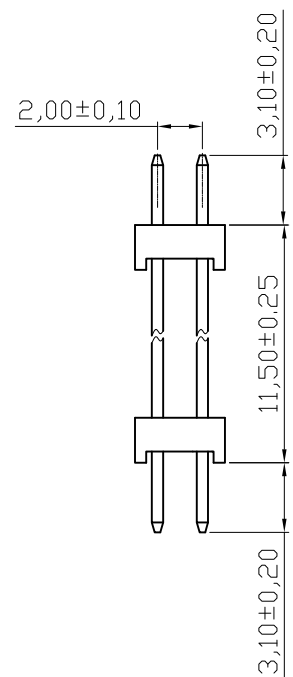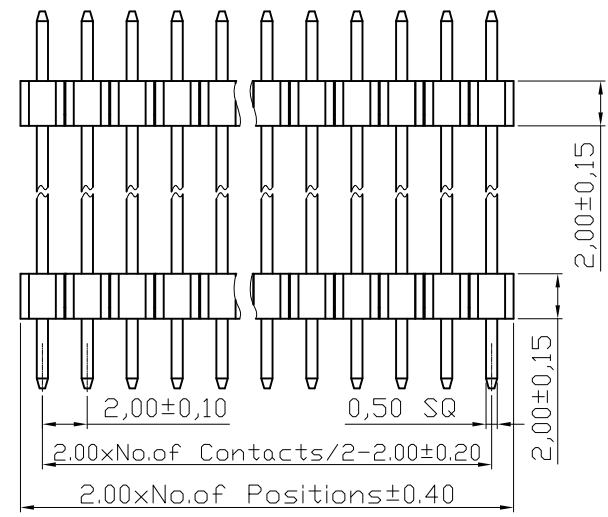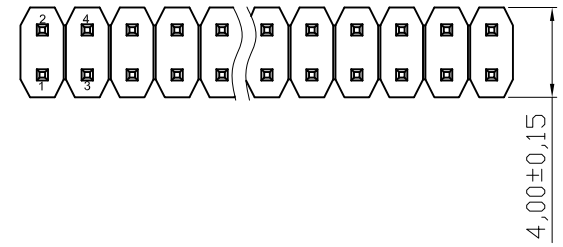

Recommended PCB Layout(Top Side)  
(PCB BOARD TOLERANCE ±0.05)

**RoHS compliant**

Scale	1:1						Date	Name	Customer-No.
TOLERANCE						Drawn	03.12.2009	Dean	ASSMANN WSW-No. <b>A-DSL-DG-Gxx-3/11/3A</b>
X.X	±0.40					Approved	03.12.2009	Hellwig	
X.XX	±0.25								
X.XXX	±0.15								
DIM	TOL								Drawing-No.
X°	±3°								<b>ASS 3781 CO</b>
		①	Drawn	03.12.2009	Dean				rev01
Angle	TOL	Id.	Modification	Date	Name			Replace	Sheet