
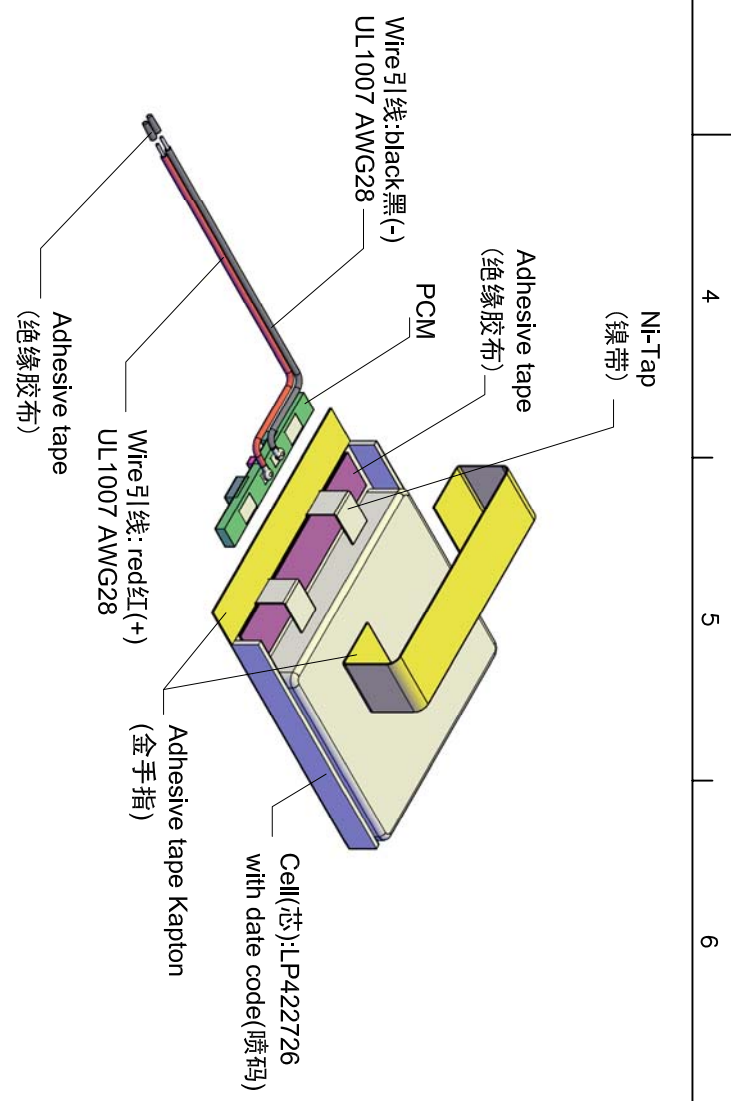
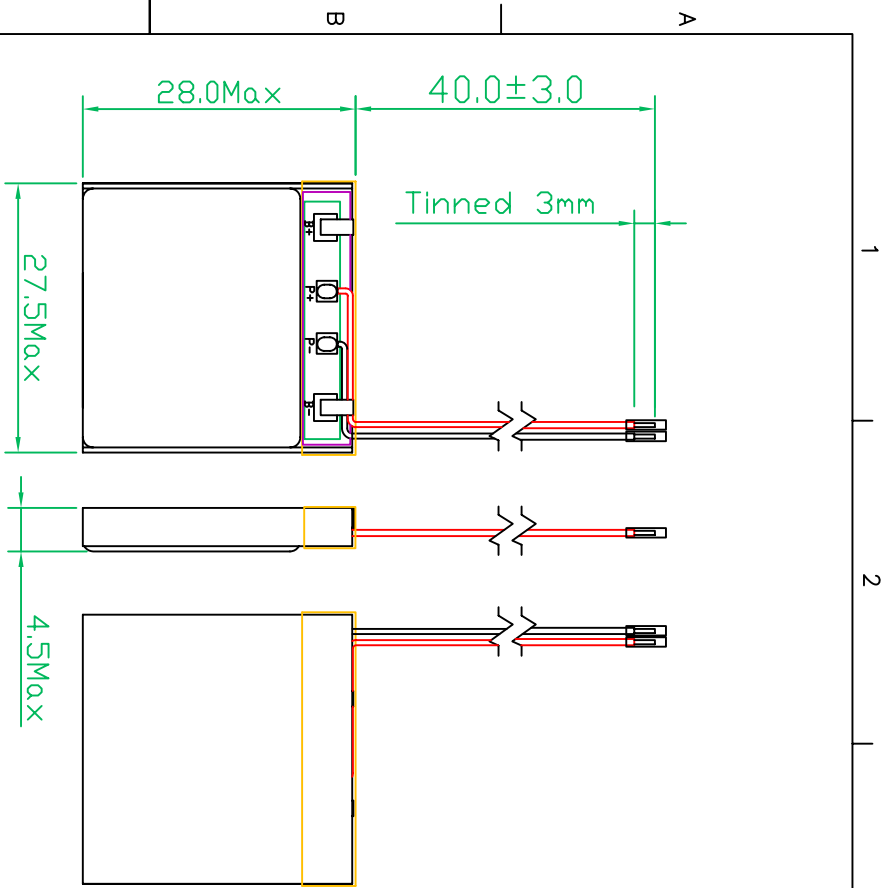


Circuit diagram

Cell(电芯):	LP422726		Date code(喷码):		Inner controlling standard(内控标准)	
	Min.Capacity 最低容量 (mAh) (0.2C, 25±3°C)		220		PCM protection (保护板参数)	
	Single battery capacity (单体电池容量)					
	Typical Capacity 典型容量 (mAh) (0.2C, 25±3°C)		240			
	Single battery capacity (单体电池容量)					
Battery Specification (电池参数)	Nominal Voltage 标称电压 (V)		3.7		Ambient Conditions (工作环境)	
	Internal impedance 内阻 (≦)		300			

Overcurrent Detection(A)		2-6	
(过流值)			
Overcharge Detection Voltage(V)		4.28±0.05	
(过充保护电压)			
Overdischarge Detection Voltage(V)		2.3±0.1	
(过放保护电压)			
Charge Temp.充电温度 (°C)		0-45	
Discharge Temp.放电温度 (°C)		-20-60	
Humidity(湿度)		65±20%	

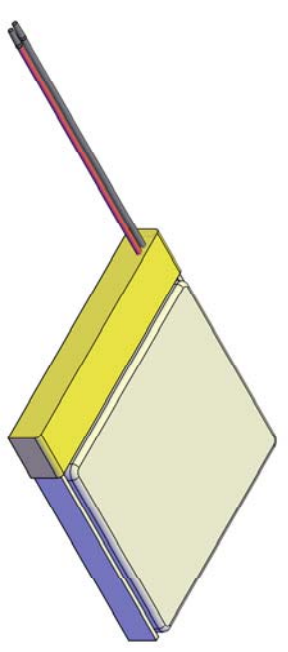

Remark(备注):
1. No scratch, distortion, discoloration and leakage on the appearance of the cell(电池表面无划痕、变形、污点及漏液等现象).
2. Rohs compliant(严格按照ROHS要求生产).

EEMB BATTERY		EEMB BATTERY	
Title	LP422726-PCM-LD	Checked 1:	Helen
File NO.	A02744	Checked 2:	Keyan
		Approved:	
		Draw Date:	10/01/22
		Revise No.:	E4-2009
		Projection:	1/1
		Page:	1/1
		Scale:	1:1
		Unit:	mm