


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DD/MM/YY
AA	Creation	NT	JZ	21/12/09
BA	Gold	JZ	***	14/04/10
CA	modification of L	ToH	JZ	27/04/10

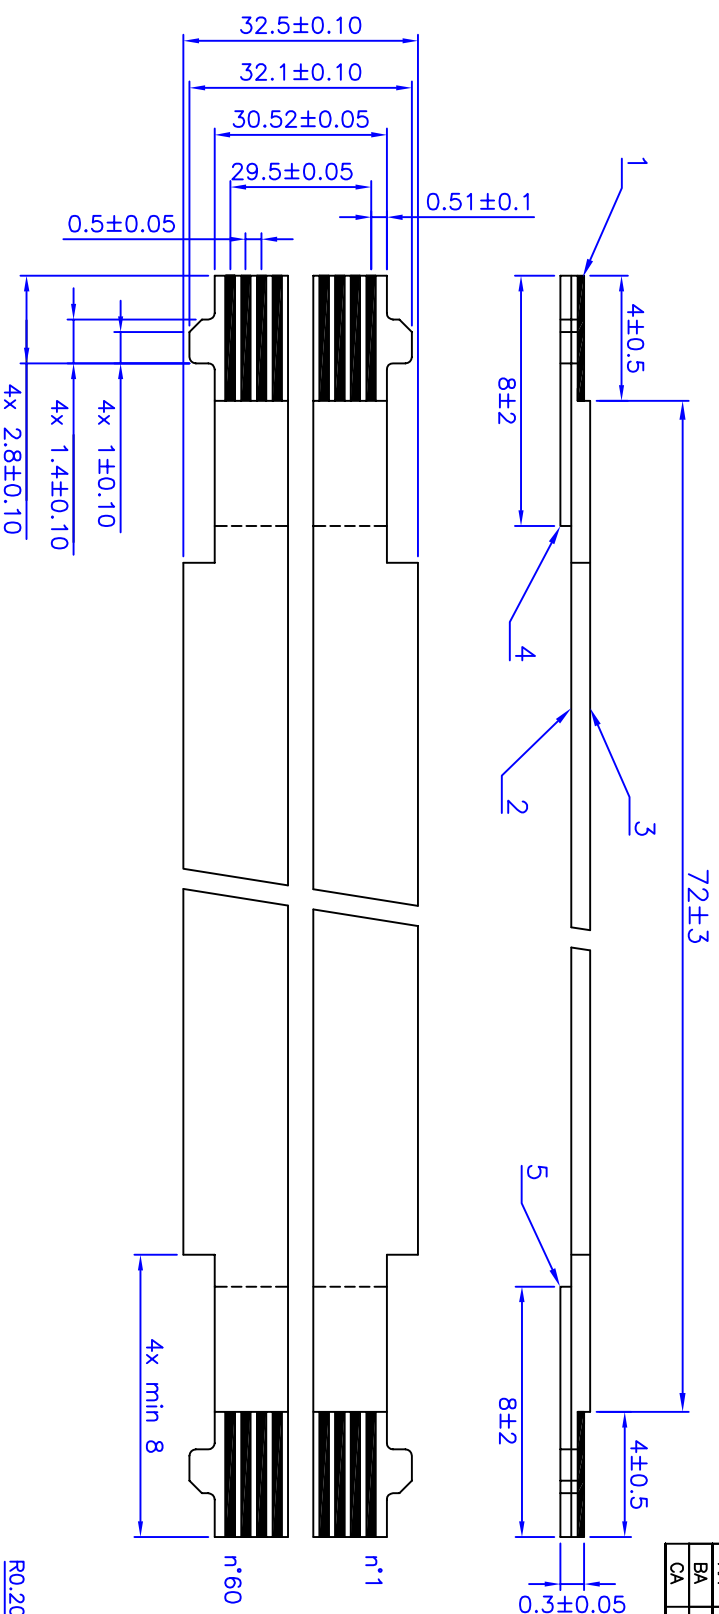


– camera checking

CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	730 Ohm/km max	–
Insulation resistance (conductor to conductor)	10 MOhm.m min	500 V DC
Dielectric test	200 V AC	1 minute
Temperature rating	–40°C to 105°C	
Voltage rating	60 V AC max	UL style 20706
Flame resistance	VW-1	UL758

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	ITEM
Conductor	Material	Golden contacts (0,3µm Ni/0,05µm Au min)	1
	Dimensions	MM 0,30 x 0,10 mm	
Insulation	Material	Polyester+flame retardant adhesive insulation	
	Dimensions	MM 0,086 mm nominal	2 3
Reinforcement	Material	Blue polyester	
tape	Dimensions	MM 0,155 mm nominal	4 5



AVX6288—shape

UNLESS OTHERWISE SPECIFIED DIMENSIONS : MM ANGLES : °		AXON' KABEL GmbH 71229 LEONBERG TEL : +49 7152 97992-0 FAX : +49 7152 97992-96 www.axon-cable.com	
CUSTOMER N°		TITLE	
FILE N°		FFCO.50A60/0072S4.0-4.0-08.0-08.0SAKK/AU N spe tol	
SJO9769C.dwg		SJO9769	
SIZE A4		AXON' GmbH N°	
SCALE : N.D.		SJO9769	
REV C		A	
Prod		Doc.	
SHEET 1 of 1			