


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DD/MM/YY
AA	Creation	NT	JZ	21/12/09
BA	Gold	JZ	***	14/04/10
CA	modification of L	ToH	JZ	27/04/10



– camera checking

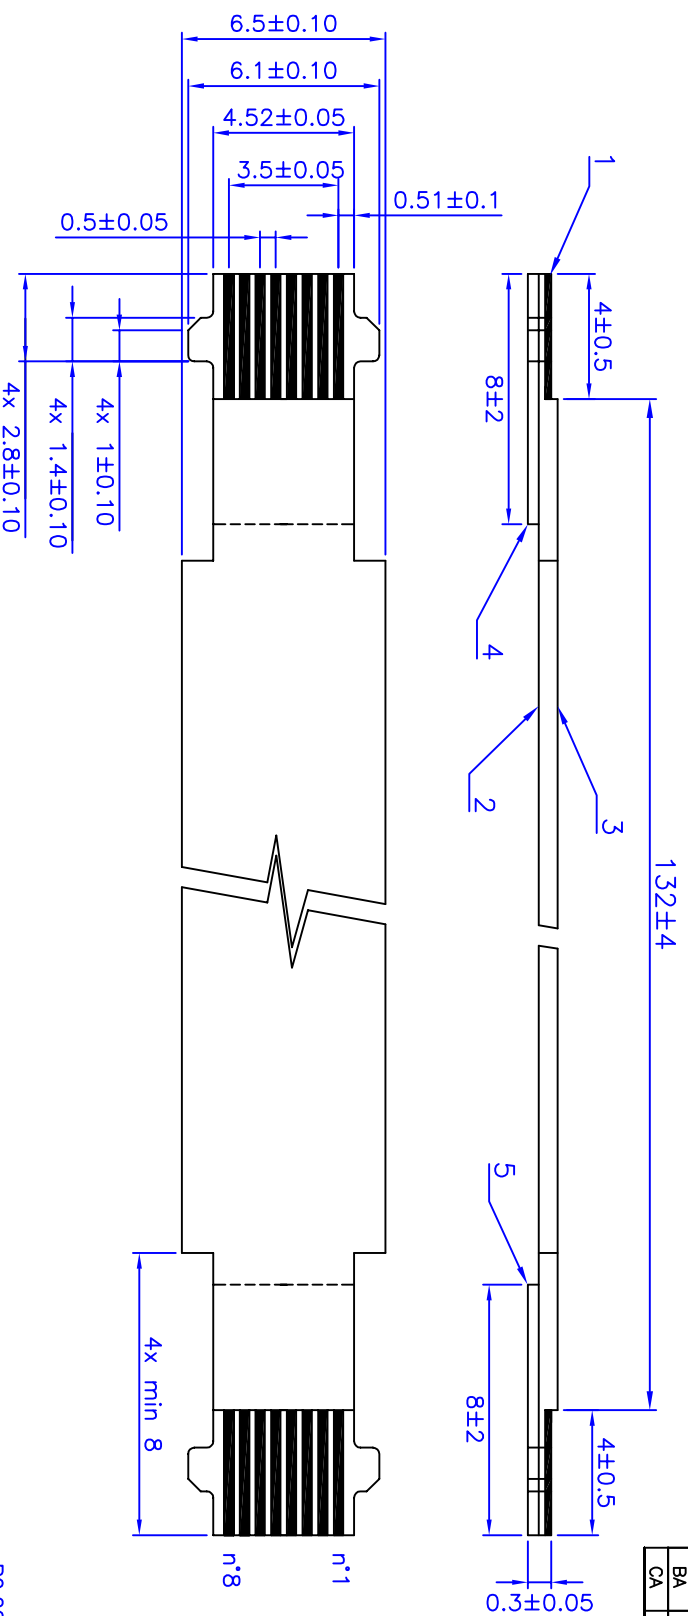


CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	730 Ohm/km max	–
Insulation resistance (conductor to conductor)	10 MOhm.m min	500 V DC
Dielectric test	200 V AC	1 minute
Temperature rating	–40°C to 105°C	
Voltage rating	60 V AC max	UL style 20706
Flame resistance	VW-1	UL758

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	ITEM
Conductor	Material	–	
	Dimensions	Golden contacts (0.3µm Ni/0.05µm Au min)	1
Insulation	Material	–	
	Dimensions	Polyester+flame retardant adhesive insulation	2 3
Reinforcement	Material	–	
tape	Dimensions	Blue polyester	4 5
		MM 0,155 mm nominal	



AVX6288–shape



UNLESS OTHERWISE SPECIFIED DIMENSIONS : MM ANGLES : °	AXON KABEL GmbH 71229 LEONBERG TEL : +49 7152 97992-0 FAX : +49 7152 97992-96 www.axon-cable.com
FILE NAME: R0.20mm max. CUSTOMER N°: R0.20mm max. FILE N°: R0.20mm max.	AXON KABEL GmbH KABEL & VERBINDUNGSSYSTEME FFCO.50A08/013254.0-4.0-08.0-08.0SAKK/AU N spe tol
FILE N°: SJ097771C.dwg	AXON KABEL GmbH SJ097771

SIZE: A4	AXON KABEL GmbH	REV: A
SCALE: 1:1	SJ097771	Prod: Doc.
		SHEET 1 of 1

This drawing is the property of Axon', and is issued on the condition that it is not copied or disclosed to any third party without prior written consent from Axon'Cable