


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DD/MM/YY
AA	Credition	NT	JZ	21/12/09
BA	Gold	JZ	***	14/04/10
CA	modi. of cond. and L	ToH	JZ	27/04/10

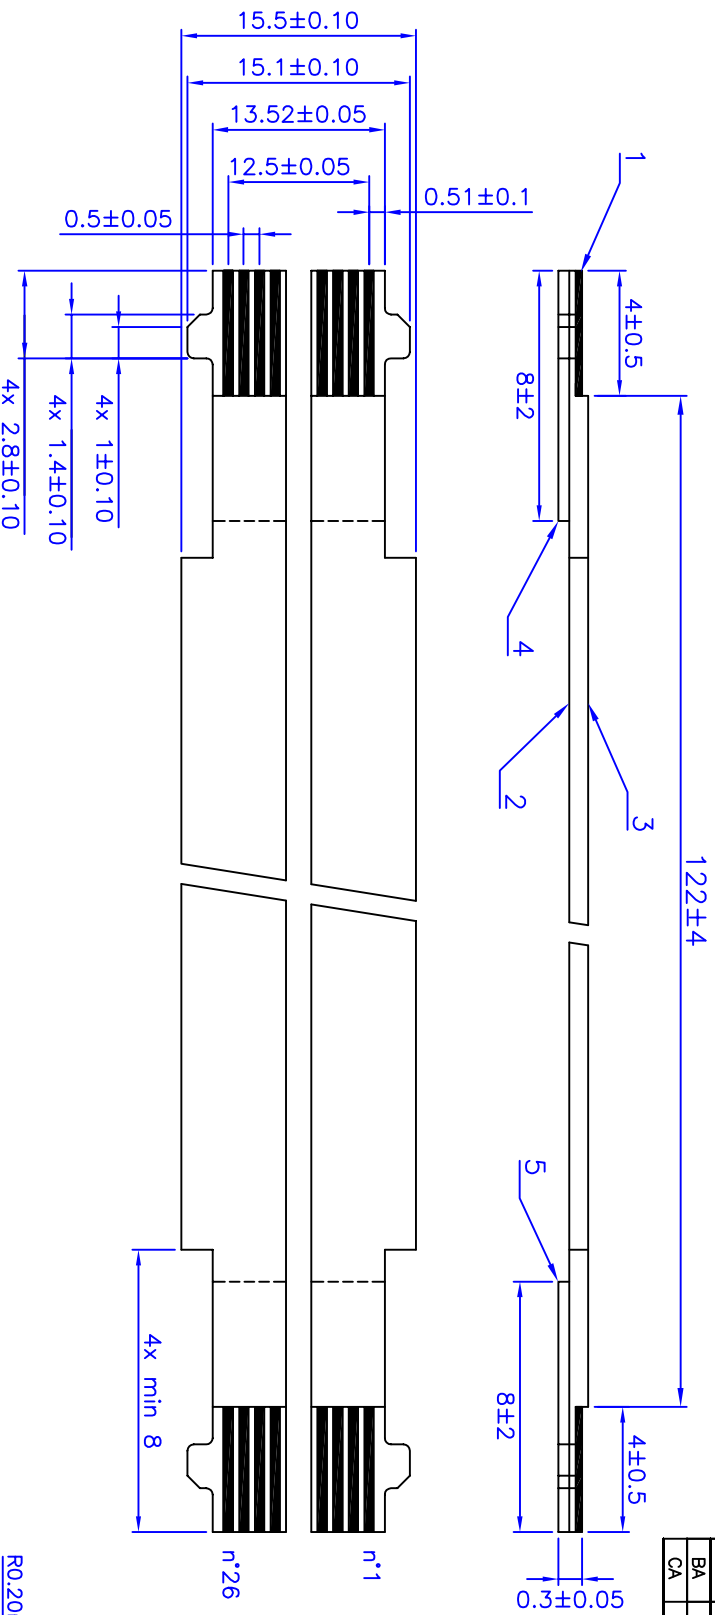


- camera checking

CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	730 Ohm/km max	—
Insulation resistance (conductor to conductor)	10 MOhm.m min	500 V DC
Dielectric test	200 V AC	1 minute
Temperature rating	−40°C to 105°C	UL style 20706
Voltage rating	60 V AC max	UL758
Flame resistance	VW-1	

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	ITEM
Conductor	—	Golden contacts (0.3µm Ni/0.05µm Au min)	1
Insulation	MM	0.30 x 0.10 mm	
Insulation	—	Polyester+flame retardant adhesive insulation	
Reinforcement	MM	0.086 mm nominal	2 3
tape	—	Blue polyester	
tape	MM	0.155 mm nominal	4 5



AVX6288—shape

UNLESS OTHERWISE SPECIFIED DIMENSIONS : MM ANGLES : °		 axon' KABEL & VERBINDUNGSSYSTEME		AXON' KABEL GmbH 71229 LEONBERG TEL : +49 7152 97992-0 FAX : +49 7152 97992-96 www.axon-cable.com	
FILE NAME : AXON' 2007/711-LM	CUSTOMER N°	TITLE		FFC0.50A26/0122S4.0-4.0-08.0-08.0SAKK/AU N spe toI	
FILE N°	FILE N°	SIZE A4		AXON' GmbH N°	
SJ09772C.dwg	SJ09772C.dwg	SCALE : N.D.		SJ09772	
REV C		REV C		REV C	
Prod		Prod		Prod	
SHEET 1 of 1		SHEET 1 of 1		SHEET 1 of 1	

This drawing is the property of Axon', and is issued on the condition that it is not copied or disclosed to any third party without prior written consent from Axon'Cable