



REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DD/MM/YY
AA	Crection	NT	JZ	16/02/10
BA	L=1200mm	NT	JZ	24/02/10

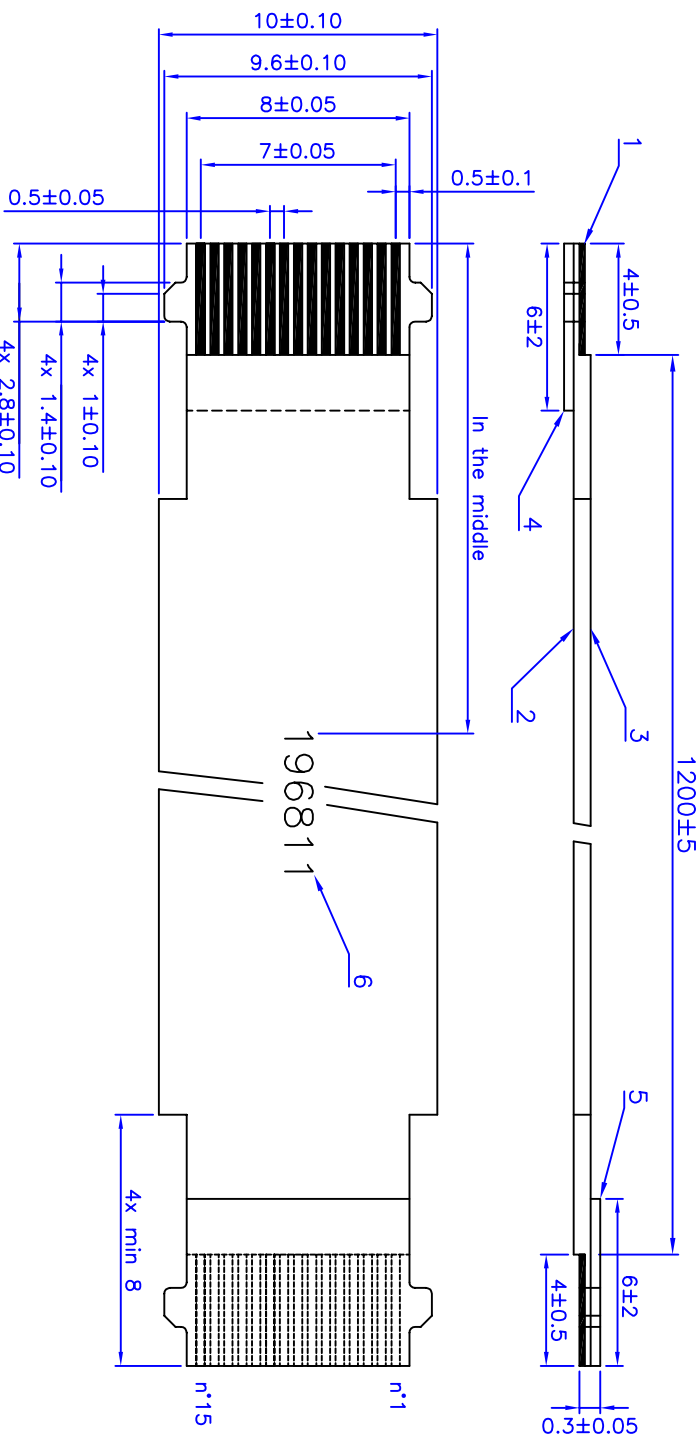


CHARACTERISTICS		
ITEMS	VALUE	TEST METHOD
Resistance of conductor	730 Ohm/km max	-
Insulation resistance (conductor to conductor)	10 Mohm.m min	500 V DC
Dielectric test	200 V AC	1 minute
Temperature rating	-40°C to 105°C	
Voltage rating	60 V AC max	UL style 20706
Flame resistance	VW-1	UL758



AVX6288—shape

COMPOSITION			
COMPONENTS	UNITS	SPECIFICATIONS	ITEM
Conductor	Material	Au Plating (min. 0,3µm Ni/min. 0,05µm Au)	1
	Dimensions	0,30 x 0,10 mm	
Insulation	Material	Polyester+flame retardant adhesive insulation	2 3
	Dimensions	0,086 mm nominal	
Reinforcement tape	Material	Blue polyester	4 5
	Dimensions	0,155 mm nominal	
Ink jet marking on side 3 : 196811			6
Ink : Ink jet black Position: in the middle Height : 2,5 mm			

UNLESS OTHERWISE SPECIFIED DIMENSIONS : MM ANGLES : °		 <p>axxon KABEL & VERBINDUNGSSYSTEME</p> <p>AXXON KABEL GmbH 71229 LEONBERG TEL : +49 7152 97992-0 FAX : +49 7152 97992-96 www.axxon-cable.com</p>
PRE CAD A30/Januar 2007/FR-LM CUSTOMER N°	FILE N° S:\10090B.dwg	
SIZE A4 SCALE : N.D.	AXXON GmbH N° Sj10090	REV 9 A PdL Doc. SHEET 1 of 1
TITLE FFCO.50D15/120054.0-4.0-06.0-06.05AKK/AU N M spe tol		

This drawing is the property of Axxon, and is issued on the condition that it is not copied or disclosed to any third party without prior written consent from Axxon Cable