REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DD/MM/YY
AA	Creation	ToH	JZ	01/06/10
*1*AA	tin plated	ToH	***	09/06/10

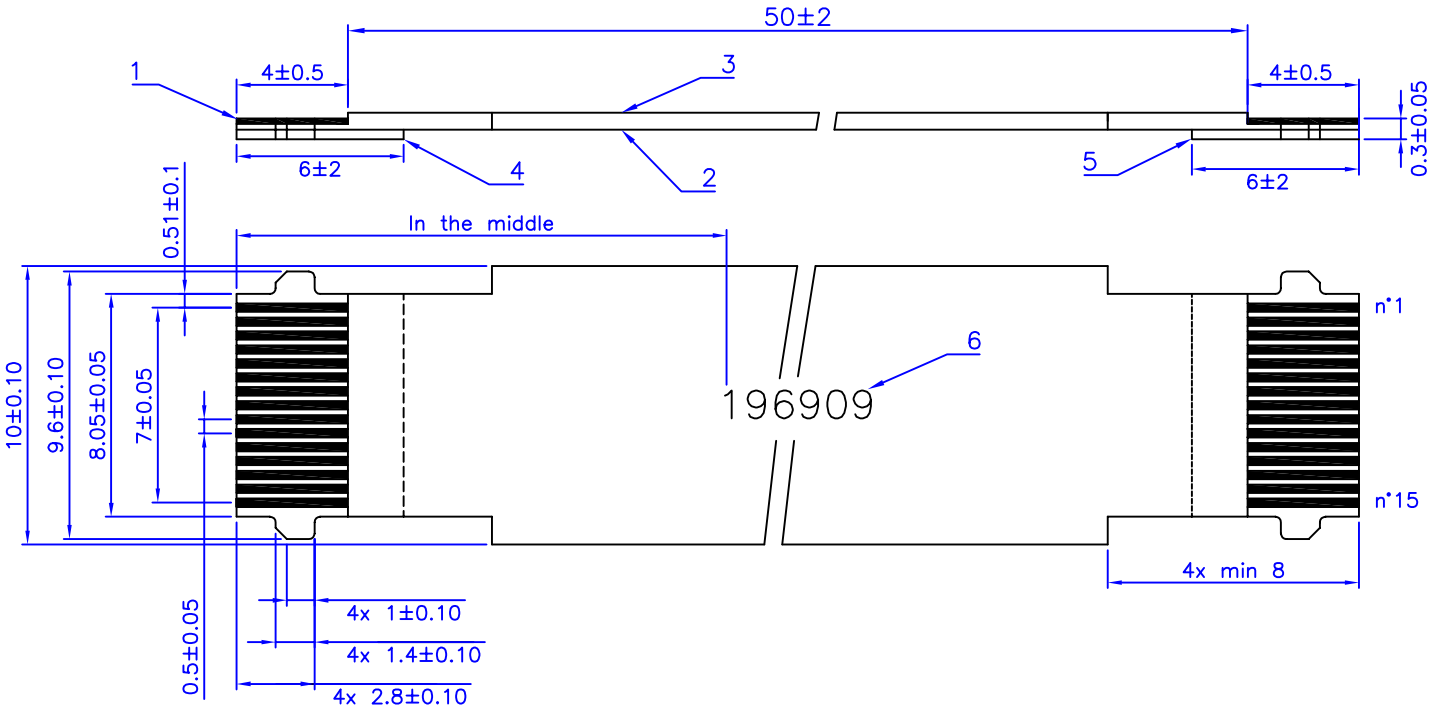

camera checking



AVX6288–shape

CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	730 Ohm/km max	–
Insulation resistance (conductor to conductor)	10 MOhm.m min	500 V DC
Dielectric test	200 V AC	1 minute
Temperature rating	–40°C to 105°C	UL style 20706
Voltage rating	60 V AC max	
Flame resistance	VW–1	UL758

COMPOSITION

COMPONENTS		UNITS	SPECIFICATIONS	ITEM
Conductor	Material	–	Tin plated copper (2 µm typ)	1
	Dimensions	MM	0,30 x 0,10 mm	
Insulation	Material	–	Polyester+flame retardant adhesive insulation	2 3
	Dimensions	MM	0,086 mm nominal	
Reinforcement tape	Material	–	Blue polyester	4 5
	Dimensions	MM	0,155 mm nominal	
Ink jet marking on side 3 : 196909				6
Ink : Ink Jet black	Position: in the middle		Height : 2,5 mm	

UNLESS OTHERWISE SPECIFIED
DIMENSIONS : MM ANGLES : d.

FFC CAD 4.0/Janvier 2001/FrL–LM

axon'
KABEL & VERBINDUNGSSYSTEME

AXON' KABEL GmbH
71229 LEONBERG
TEL : +49 7152 97992-0
FAX : +49 7152 97882-86
www.axon-cable.com

CUSTOMER N°

FILE N°
SJ10327*1*A.dwg

TITLE
FFC0.50A15/0050S4.0–4.0–06.0–06.0SAKK/N M spe tol

SIZE A4
SCALE : N.D.

AXON' GmbH N°
SJ10327*1*

REV A Prod. | A Doc.
SHEET 1 of 1

This drawing is the property of Axon', and is issued on the condition that it is not copied or disclosed to any third party without prior written consent from Axon'Cable