
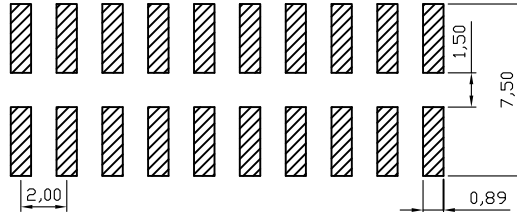


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

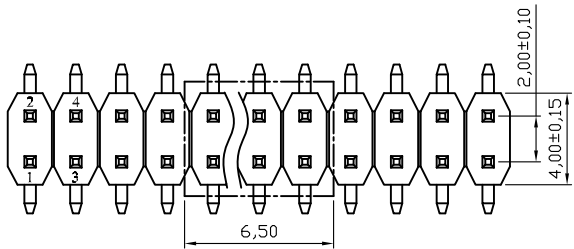

NOTES:

MATERIAL



- 1. Insulator Material: PA6T+30%GF(UL94V-0)
- 2. Contact Material : Brass
- 3. Contact Plating : 1u" Au Over Ni

ELECTRICAL

- 1. Current Rating : 1.5AMP
- 2. Withstand Voltage : 500V AC/DC
- 3. Contact Resistance : 20mΩ max
- 4. Insulation Resistance: 1000MΩ min

ENVIRONMENTAL

- 1. Operation Temperature: -40°C to +105°C
- 2. Packing: Tape reel + Cap

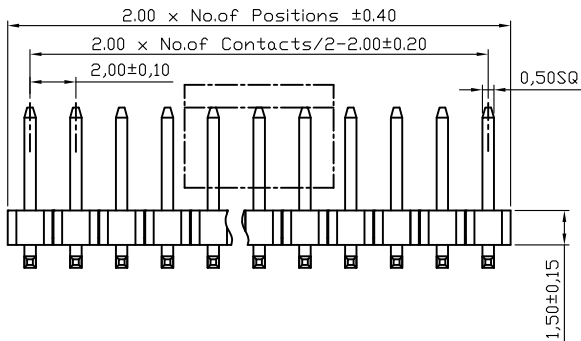

RoHS compliant

Scale	1:1						Date	Name	Customer-No.
TOLERANCE						Drawn	10.06.2010	Alex	ASSMANN WSW-No. A-SL200-DG-GxxMR-4
X.X	±0.40					Approved	10.06.2010	Hellwig	
X.XX	±0.25								
X.XXX	±0.15								
DIM	TOL								Drawing-No.
X°	±3°	①	Drawn	10.06.2010	Alex	ASSMANN WSW components		ASS 4220 CO	rev00
X.X°	±X°								
Angle	TOL	Id.	Modification	Date	Name			Replace	SHEET