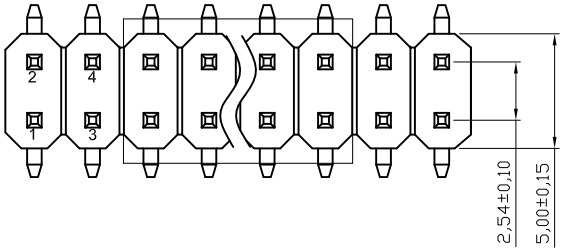

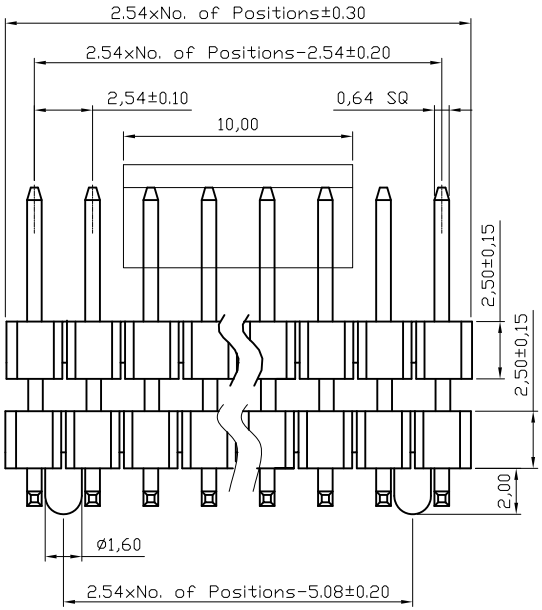

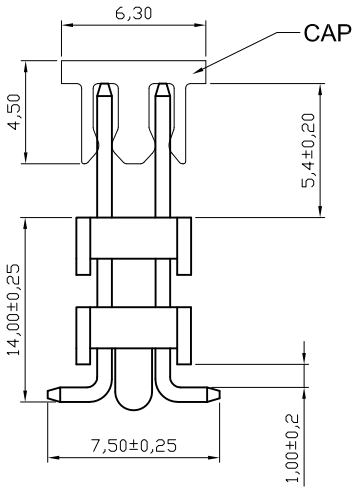

NOTES:

MATERIAL
1.Insulator Material:PA6T+30%GF(UL94V-0)
2.Contact Material : Brass
3.Contact Plating : 1u" Au over Ni
ELECTRICAL
1.Current Rating : 3.0AMP
2.Withstand Voltage : 500V AC/DC
3.Contact Resistance : 20mΩ max
4.Insulation Resistance: 1000MΩ min
ENVIRONMENTAL
1.Operation Temperature: -40°C to +105°C
2.Packing : Tube+Cap

Recommended PCB Layout(Top Side)
(PCB Board Tolerance±0.05)

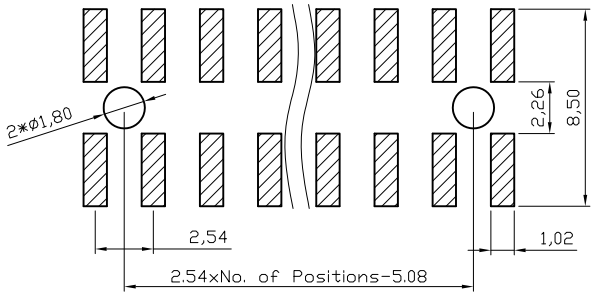

RoHS compliant

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
DIM	TOL
X°	±3°
X.X°	±x°
Angle	TOL

Id.	Modification	Date	Name
1	Correct WSW P/N	05.07.2010	Rale
0	Drawn	11.06.2010	Alex

	Date	Name
Drawn	11.06.2010	Alex
Approved	05.07.2010	Hellwig

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No. 1
A-DSL-DG-GxxM-5/12

Drawing-No.
ASS 4223 CO

rev01

Replace

SHEET 1 OF 1

SV1948