
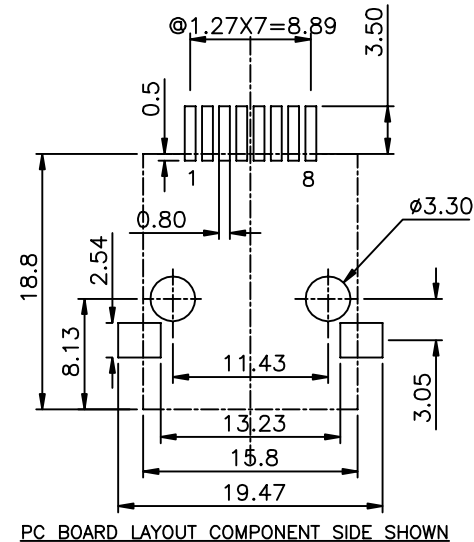
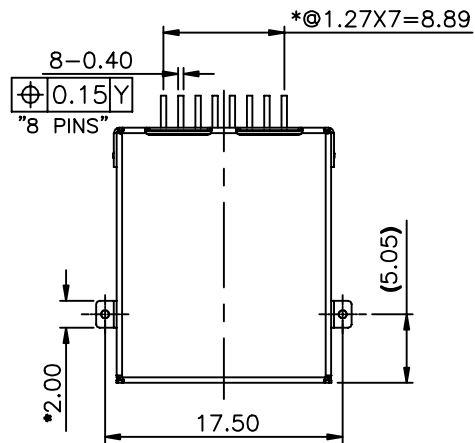


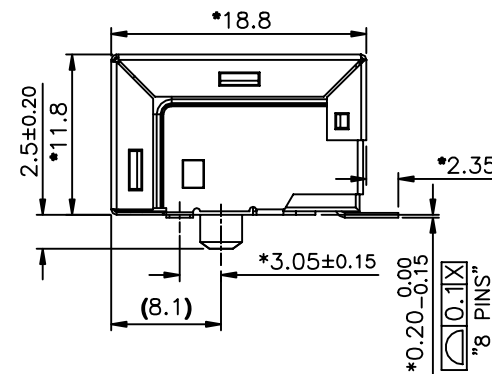


SECTION: A-A

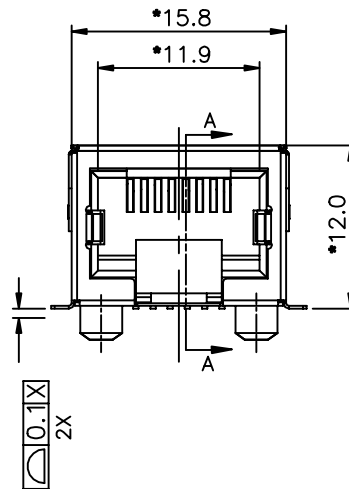

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 40 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:


1. HOUSING & PLATE MATERIAL : NYLON+GF30% UL94V-0.
2. HOUSING & PLATE COLOR : BLACK
3. SHIELD MATERIAL : COPPER C2680H t=0.20mm.
4. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
5. PLATING : GOLD PLATING OVER NICKEL.
6. OPERATING LIFE : 750 CYCLES MIN.
7. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION : -40°C TO +85°C.
3. IR REFLOW PEAK SOLDERING TEMPERATURE: 255°C~265°C 5~10 SECONDS.

4. RoHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

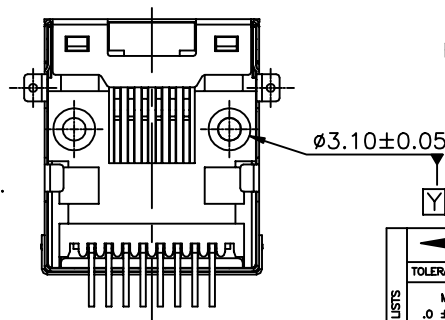

ROHS PART NUMBER: E5388-UH05VX-L

4-30u" 5-50u"

MM (INCH)		DFTO ANKUE	DATE 08/23/06'
TOLERANCES EXCEPT AS NOTED		CHKD ASHELLY	DATE 2006/11/3
		MFO	DATE
		APPVLLUSHENG	DATE 2006/11/3
MM		MATERIAL :	
.0 ± 0.2	±	QT'Y :	
.00 ± 0.15	±	FINISH :	
.000 ± 0.075	±	SCALE : 5:4	
ANGLES ± 0.5		THIRD ANGLE PROJECTION	



RoHS Compliant

FULL RISE ELECTRONIC CO., LTD

TITLE SMT TYPE

SIDE ENTRY PCB JACK 8P

DRAWING NO. GE533084-LA

/PART NO. SEE NOTE

SIZE

REV

DO NOT SCALE DRAWING

SHEET 1 OF 1