

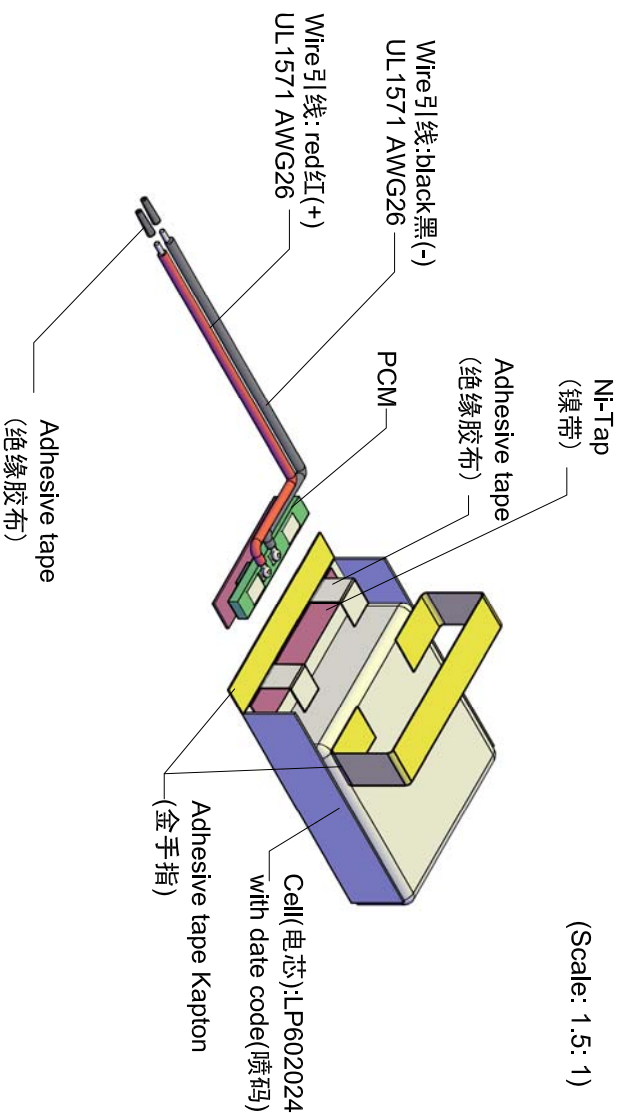


Circuit diagram

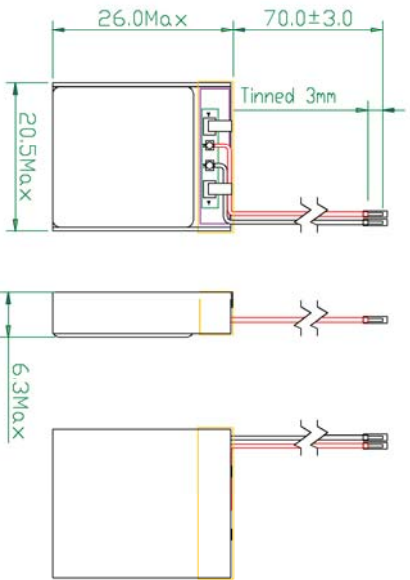

|           |                                 |                                             |                |                            |                                                                                                                                    |  |
|-----------|---------------------------------|---------------------------------------------|----------------|----------------------------|------------------------------------------------------------------------------------------------------------------------------------|--|
| Cell(电芯): | LP602024                        |                                             | Date code(喷码): |                            | Inner controlling standard(内控标准)                                                                                                   |  |
|           | Battery Specification<br>(电池参数) | Min.Capacity 最低容量(mAh)<br>(0.2C,25±3°C)     | 190            | *PCM protection<br>(保护板参数) | Overcurrent Detection(A)<br>(过流值)<br>Overcharge Detection Voltage(V)<br>(过充保护电压)<br>Overdischarge Detection Voltage(V)<br>(过放保护电压) |  |
|           |                                 | *Single battery capacity (单体电池容量)           |                |                            |                                                                                                                                    |  |
|           |                                 | Typical Capacity 典型容量(mAh)<br>(0.2C,25±3°C) | 210            |                            |                                                                                                                                    |  |
|           |                                 | *Single battery capacity (单体电池容量)           |                |                            |                                                                                                                                    |  |
| D         | Ambient Conditions<br>(工作环境)    | Nominal Voltage 标称电压(V)                     | 3.7            | Charge Temp.充电温度(°C)       | 0-45                                                                                                                               |  |
|           |                                 | Internal impedance 内阻(≦)                    | 300            |                            |                                                                                                                                    |  |
|           |                                 |                                             |                |                            |                                                                                                                                    |  |
|           |                                 |                                             |                |                            |                                                                                                                                    |  |
| D         | Discharge Temp.放电温度(°C)         | -20-60                                      |                | Humidity(湿度)               | 65±20%                                                                                                                             |  |
|           |                                 |                                             |                |                            |                                                                                                                                    |  |
|           |                                 |                                             |                |                            |                                                                                                                                    |  |

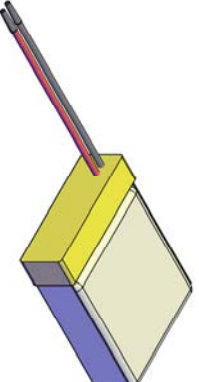

|            |  |                 |  |             |  |              |  |
|------------|--|-----------------|--|-------------|--|--------------|--|
| Title      |  | LP602024+PCM-LD |  | Approved:   |  | Scale: 1 : 1 |  |
| File NO.   |  | A02601          |  | Draw Date:  |  | Unit: mm     |  |
| Drawn:     |  | Mo Yongdi       |  | Revise No.: |  | E4-2009      |  |
| Checked 1: |  | Richy           |  | Projection: |  | 1/1          |  |
| Checked 2: |  | Keyan           |  | Page:       |  | 1/1          |  |

Remark(备注):  
1. No scratch,distortion,discoloration and leakage on the appearance of the cell(电池表面无划痕、变形、污点及漏液等现象).  
2. Rohs compliant(严格按照ROHS要求生产).