

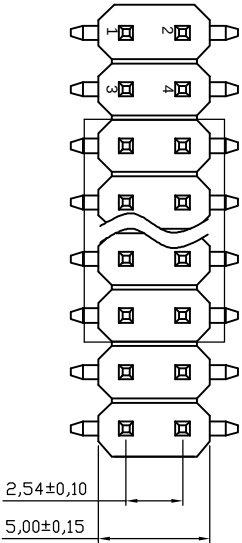
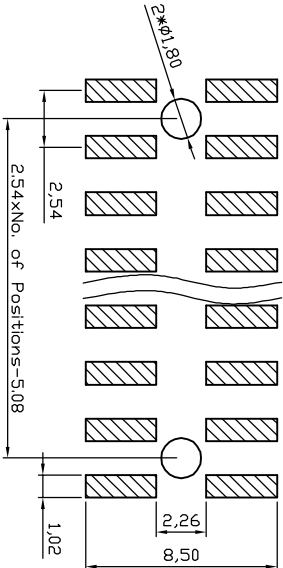


	1	2	3	4	5	6	7	
--	---	---	---	---	---	---	---	--

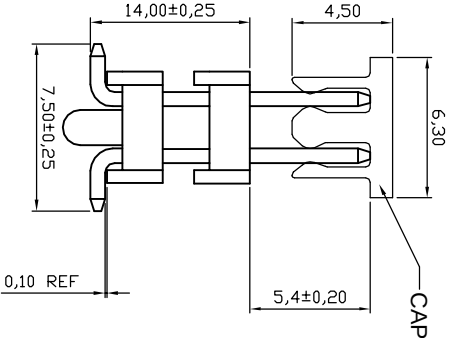

- NOTES:**
- MATERIAL**
1. Insulator Material: PA6T+30%GF(U94V-0)
 2. Contact Material : Brass
 3. Contact Plating : 1u" Au over Ni
- ELECTRICAL**
1. Current Rating : 3.0AMP
 2. Withstand Voltage : 500V AC/DC
 3. Contact Resistance : 20mΩ max
 4. Insulation Resistance: 1000MΩ min
- ENVIRONMENTAL**
1. Operation Temperature: -40°C to +105°C
 2. Packing : Tube+Cap

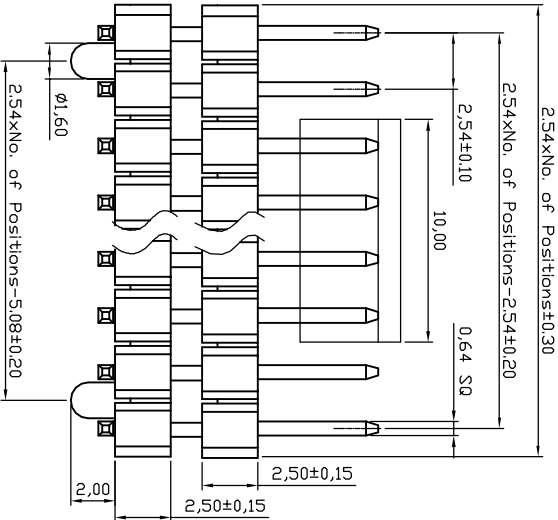

Recommended PCB Layout(Top Side)
(PCB Board Tolerance±0,05)

RoHS compliant

G	Scale	1:1						Customer-No.	
	TOLERANCE					Date	Name		
	X.X	±0.40				26.10.2010	Rale		
	X.XX	±0.25			Approved	10.12.2010	Geiber	ASSMANN WSW-No.	
	X.XXX	±0.15						A-DSL-DG-GXXM-5/14LP	①
H	DIM	TOL	①	P/N new		10.12.2010	Schulz	Drawing-No.	
	X°	±3°						ASS 4309 CO	rev01
	X.X°	±X°	①	Drawn		26.10.2010	Rale	Replace	SHEET 1 OF 1
	Angle	TOL	Id.	Modification	Date	Name			

1

2

3

4

5

6

7

SV2027