
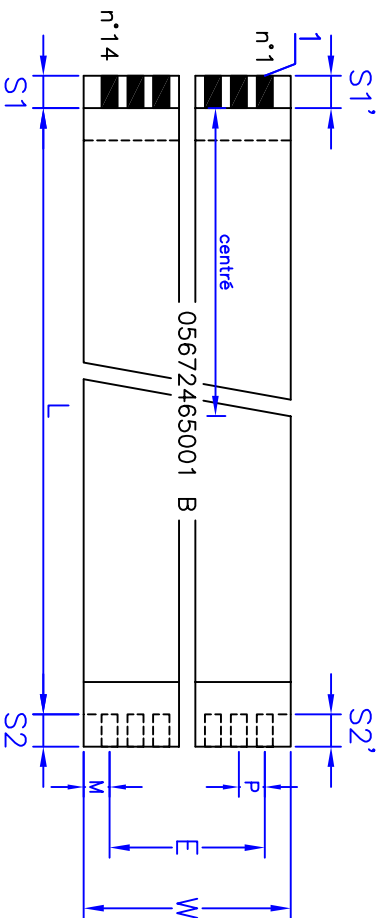


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DATE
AA	CREATION	JZ	***	15/03/2011

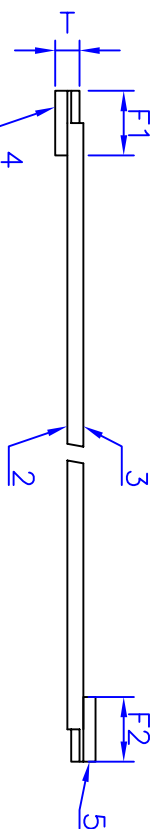

DIMENSIONS

ITEMS	UNITS	SPECIFICATIONS	
Number of conductors	—	14	
Pitch	MM	1,00 ± 0,10	P
Span	MM	13,00 ± 0,15	E
Total width	MM	15,00 ± 0,15	W
Margin	MM	1,00 ± 0,20	M
Strip length	MM	4 ± 1	S1
Strip length	MM	4 ± 1	S2
End thickness	MM	0,30 ± 0,05	T
Insulated length	MM	2650 ± 5	L
Reinforcement length	MM	8 ± 2	F1
Reinforcement length	MM	8 ± 2	F2
Strip difference S–S'	MM	0,40 max	


Ink jet marking on side itemized 3 : 05672465001 B		
Ink : Ink Jet Black	Height : 2,5 mm	Position : centred

CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	720 Ohm/km maxi	—
Conductor to conductor insulation resistance	10 MOhm.m mini	500 V DC
Dielectric test (conductor to conductor)	1 minute	400 V AC
Temperature rating	105 °C	—
Voltage rating	60 V AC maxi	—
Flame resistance	VW – 1	UL 758

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	Item
Conductor	Material	—	1
	Dimensions	MM 0,70x0,035 mm nominal	
Insulation	Material	—	2 3
	Thickness	MM 0,043 mm nominal	
Reinforcement tape	Material	—	4 5
	Thickness	MM 0,23 mm nominal	

UNLESS OTHERWISE SPECIFIED DIMENSIONS : MM ANGLES : d.			
			
Customer DRESSLER	TITLE :	AXON'CABLE SAS 51210 MONTMIRAIL - FRANCE TEL : +33 3 26 81 70 00 FAX : +33 3 26 81 28 83 www.axon-cable.com	
FILE N° SJ11132A.dwg	FFC1,00D14/2650E4,0-4,0-08,0-08,0EARR/M		
SIZE A4	AXON'SA N° SJ11132		
SCALE : N.D.			
REV A A	Prod. Doc.	SHEET 1 of 1	