


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DATE
AA	CREATION	JZ	***	15/03/2011

CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	720 Ohm/km maxi	-
Conductor to conductor insulation resistance	10 MOhm.m mini	500 V DC
Dielectric test (conductor to conductor)	1 minute	400 V AC
Temperature rating	105 °C	-
Voltage rating	60 V AC maxi	-
Flame resistance	VW - 1	UL 758

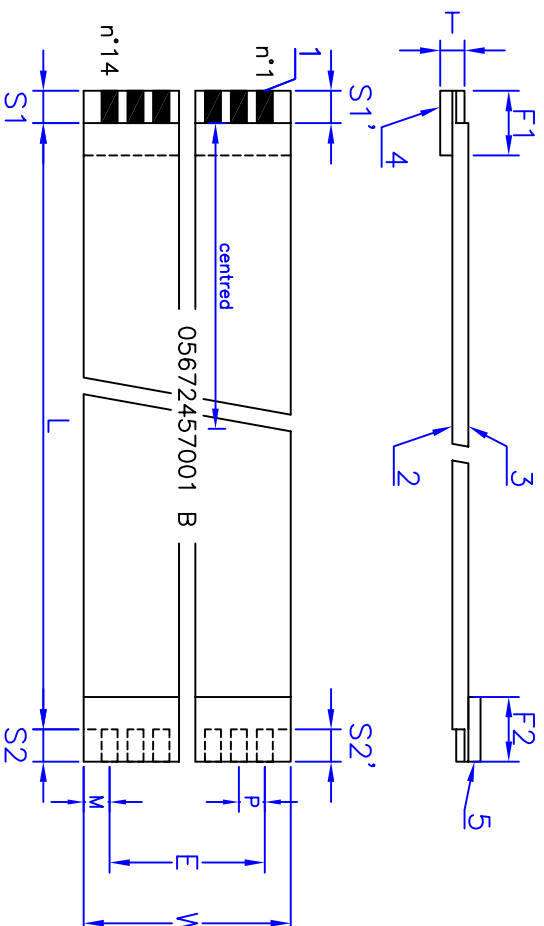

DIMENSIONS

ITEMS	UNITS	SPECIFICATIONS
Number of conductors	-	14
Pitch	MM	1,00 ± 0,10
Span	MM	13,00 ± 0,15
Total width	MM	15,00 ± 0,15
Margin	MM	1,00 ± 0,20
Strip length	MM	4 ± 1
Strip length	MM	4 ± 1
End thickness	MM	0,30 ± 0,05
Insulated length	MM	1650 ± 5
Reinforcement length	MM	8 ± 2
Reinforcement length	MM	8 ± 2
Strip difference S-S'	MM	0,40 max

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	Item
Conductor	Material	-	-
	Dimensions	MM	0,70x0,035 mm nominal
Insulation	Material	-	Polyester+flame retardant adhesive insulation
	Thickness	MM	0,043 mm nominal
Reinforcement	Material	-	Red polyester
	Thickness	MM	0,23 mm nominal

Ink jet marking on side itemized 3 : 05672457001 B
Ink : Ink Jet Black
Height : 2,5 mm
Position : centred

UNLESS OTHERWISE SPECIFIED DIMENSIONS : MM ANGLES : d.		 AXON'CABLE SAS 51210 MONTMIRAIL - FRANCE TEL : +33 3 26 81 70 00 FAX : +33 3 26 81 28 83 www.axon-cable.com	
Customer DRESSLER FILE N° SJ11140A.dwg	TITLE : FFC1,00D14/1650E4,0-4,0-08,0-08,0EARR/M		
SIZE A4	AXON'SA N° SJ11140	REV A	Prod. Doc.
SCALE : N.D.		SHEET 1 of 1	