


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DATE
AA	CREATION	TOH	***	18/07/2011



CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	1460 Ohm/km max	—
Conductor to conductor insulation resistance	10 Mohm.m mini	500 V DC
Dielectric test (conductor to conductor)	1 minute	200 V AC
Temperature rating	105 °C	—
Voltage rating	60 V AC maxi	—
Flame resistance	VW — 1	UL 758

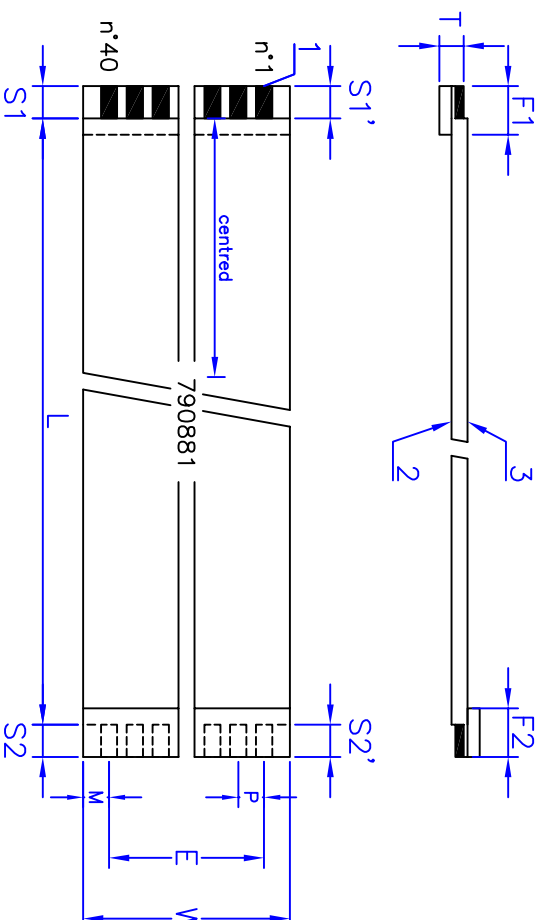

DIMENSIONS

ITEMS	UNITS	SPECIFICATIONS
Number of conductors	—	40
Pitch	MM	0,50 ± 0,05
Span	MM	19,50 ± 0,10
Total width	MM	20,50 ± 0,06
Margin	MM	0,50 +0,15/−0,096
Strip length	MM	4 ± 0,8
Strip length	MM	4 ± 0,8
End thickness	MM	0,30 ± 0,05
Insulated length	MM	147 ± 4
Reinforcement length	MM	6 ± 2
Reinforcement length	MM	6 ± 2
Strip difference S–S'	MM	0,30 max

Ink jet marking on side itemized 3 : 790881	
Ink : Ink Jet black	Height : 2,5 mm
	Position : centred

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	Item
Conductor	Material	—	—
	Dimensions	MM	Golden contacts (0,3µm Ni/0,05µm Au min) ¹
Insulation	Material	—	—
	Thickness	MM	Polyester+flame retardant adhesive insulation
Reinforcement	Material	—	—
	Thickness	MM	Blue polyester
			4 5

UNLESS OTHERWISE SPECIFIED
DIMENSIONS : MM ANGLES : d.



axon'
CABLE & INTERCONNECTIQUE

AXON'CABLE SAS
51210 MONTMIRAIL - FRANCE
TEL : +33 3 26 81 70 00
FAX : +33 3 26 81 28 83
www.axon-cable.com

FFC CAD 4.0/Janvier 2001/FFC-LM

CUSTOMER N°

790881

FILE N°

SJ11409A.dwg

TITLE :


FFC0,50D40/0147S4,0–4,0–06,0–06,0FAUJ/M/AU

SIZE

A4

AXON'SA N°

SJ11409



SCALE : N.D.

REV

A A
Prod. Doc.
SHEET 1 of 1