


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DD/MM/YY
AA	Creation	ToH	JZ	27/02/12
BA	modification of punching	ToH	JZ	28/02/12

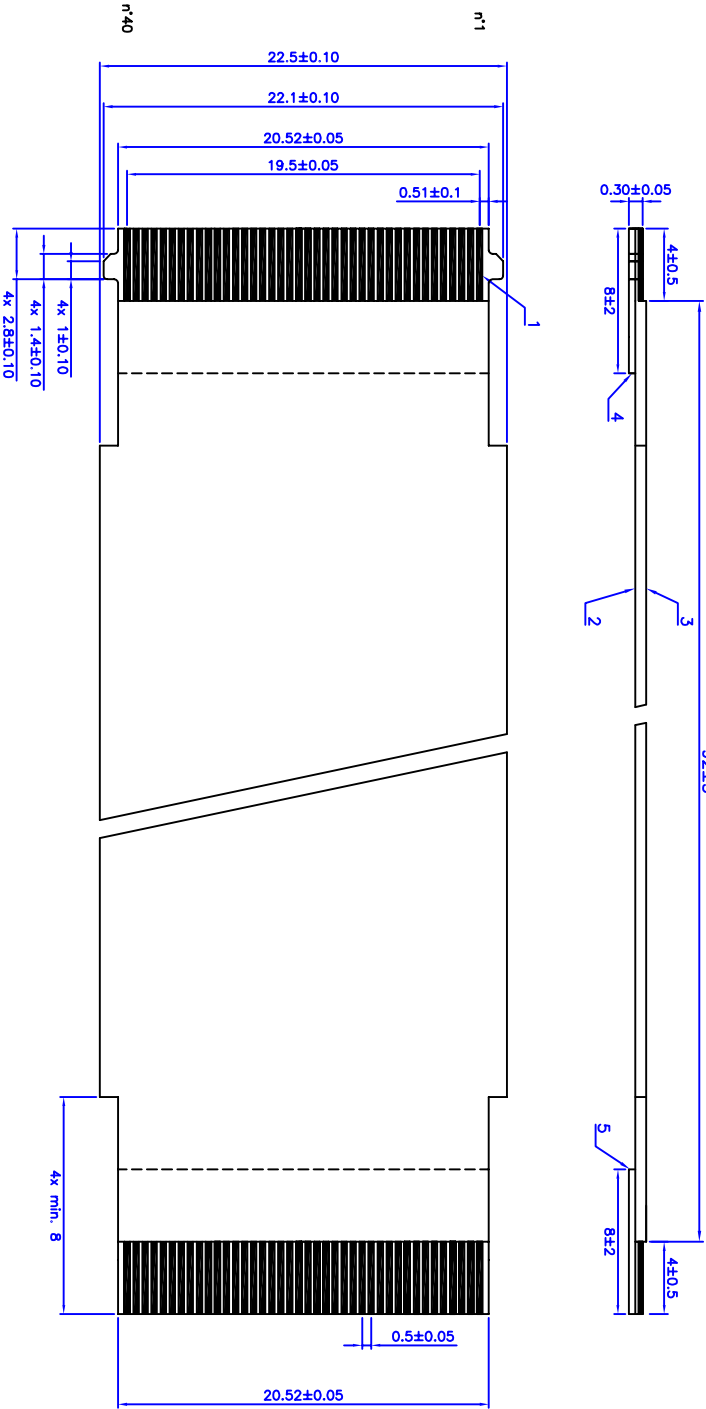

Camera checking

CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	1460 Ohm/km max	—
Conductor to conductor insulation resistance	10 MOhm.m min	500 V DC
Dielectric test (conductor to conductor)	1 minute	200 V AC
Temperature rating	105 °C	—
Voltage rating	60 V AC max	—
Flame resistance	VW — 1	UL 758

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	Item
Conductor	—	Tin plated copper (2 µm typ)	1
Insulation	MM	0,30x0,05 mm nominal	2
Reinforcement	MM	0,086 mm nominal	3
tape	—	Blue polyester	4
	MM	0,180 mm nominal	5

UNLESS OTHERWISE SPECIFIED
DIMENSIONS : MM ANGLES : d.



axon'
KABEL & VERBINDUNGSSYSTEME

AXON' KABEL GmbH
71229 LEONBERG
TEL. : +49 7152 97992-0
FAX : +49 7152 97992-96
www.axon-cable.com

CUSTOMER N°

TITLE

FILE N°
SJ12091B.dwg

FFCO.50A40/009254.0-4.0-08.0-08.0FAU/N spe toi (AVX6288-ZIF)



SIZE A4
SCALE : N.D.

AXON' GmbH N°

SJ12091

REV. B
Prod. A
SHEET 1 of 1

AVX6288—shape

