



	1	2	3	4	5	6	7
--	---	---	---	---	---	---	---

A	1. MATERIAL		
	ITEM	MAJOR COMPONENTS	MATERIAL OR TYPE
	1-1	FAN FRAME	PBT 100%
	1-2	FAN BLADE	PBT 85%+Fiber 30%
	1-3	BEARING	Sleeve Bearing
B	1-4	PLASTIC MAGNET STRIP	Strontium Ferrite
	1-5	LEAD WIRES	1007 24AWG L-300mm
	1-6	CONNECTOR HOUSING	

A	3.ELECTRICAL		
	ITEM	DESCRIPTION	MEASUREMENT
	3-1	RATED VOLTAGE	DC 48V
	3-2	RATED CURRENT	0.05~0.09
	3-3	RATED INPUT POWER	3.36 Watts
B	3-4	RATED SPEED	RPM 3600±10%(after running 3-5minutes)
	3-5	MAXIMUM AIR FLOW	17.3CFM
	3-6	MAXIMUM STATIC PRESSURE	3.44mmHg

2. MECHANICAL

2-1. EXTERNAL DIMENSIONS: Refer to Drawing.
2-2. WEIGHT: 46g

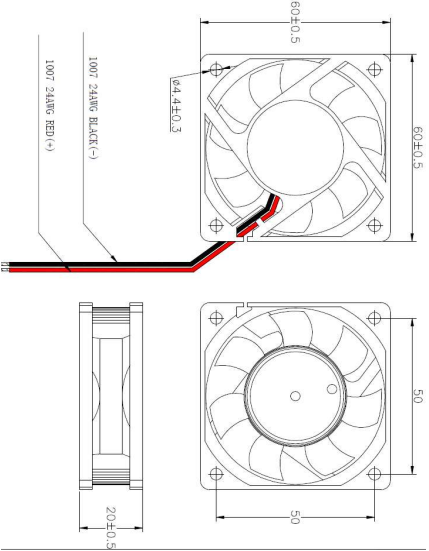

4. CHARACTERISTICS

4-1. OPERATING TEMPERATURE: -10°C ~+70°C /66%(RH)
4-2. STORAGE TEMPERATURE: -40°C ~+70°C /66%(RH)
4-3. LIFE EXPECTANCY: 50000 HOURS AT 25°C 65%R.H.

RoHS compliant

Unit:mm

						Customer-No.		
					Date	Name		
					Drawn	Lucas		
					Approved	29.02.2011	Andy	ASSMANN WSW-No. VD0648MSCW
							Drawing-No.	
							ASS 1085 HS	rev00
							Replace	Sheet



1	2	3	4	5	6	7	KT1554
---	---	---	---	---	---	---	--------