
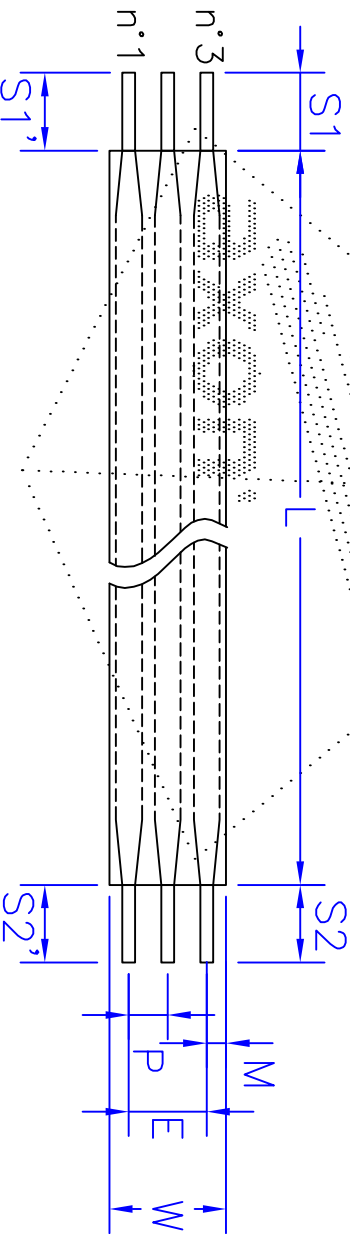


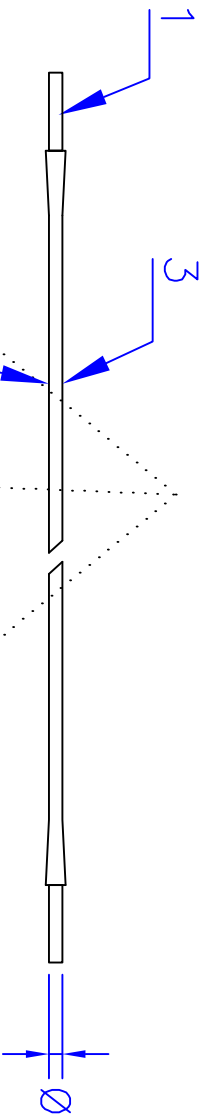

CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	145 Ohm/km maxi	—
Conductor to conductor insulation resistance	10 MOhm.m mini	500 VDC
Dielectric test (conductor to conductor)	1 minute	1500 VAC
Temperature rating	−30°C/105°C	—
Voltage rating	200 VAC maxi	—
Current rating	2 A maxi	—
Flame resistance	VW — 1	UL 758

COMPOSITION

COMPONENTS		UNITS	SPECIFICATIONS	Item
Conductor	Material	—	Tin plated copper (2 µm typ)	1
	Dimensions	MM	AWG 26 either 1,30x0,10 nom. for flat conductor	
	Material	—	Polyester + flame retardant adhesive	
Insulation	Thickness	MM	0,10 mm nominal	2 3

DIMENSIONS

ITEMS	UNITS	SPECIFICATIONS	
Number of conductors	—	3	
Pitch	MM	2,00 ± 0,10	P
Span	MM	4,00 ± 0,20	E
Total width	MM	6,00 ± 0,15	W
Margin	MM	1,00 ± 0,20	M
Strip length	MM	4,00 ± 0,50	S1
Strip length	MM	4,00 ± 0,50	S2
Diameter round conductor	MM	0,40 ± 0,02	Ø
Insulated length	MM	93,00 ± 3,00	L
Strip difference S-S'	MM	0,40 max	

PRELIMINARY DRAWING

SAUF INDICATION CONTRAIRE DIMENSIONS : MM ANGLES : 45°

AXON CABLE SA
51210, MONTMIRAIL - FRANCE
TEL. : +33 3 26 81 70 00
FAX : +33 3 26 81 28 83
www.axon-cable.com

N client
Small Innovations GmbH
CAO N.
A18584A.dwg

Titre :
RFC2.00C03/0093H4.0-4.0-0-0SA--

Format : N. AXON
A4

Echelle : N.D.

Indice
—
Prod.
—
Doc.

Page : 1/1