


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DATE
A	CREATION	JZ	TOH	30/10/12

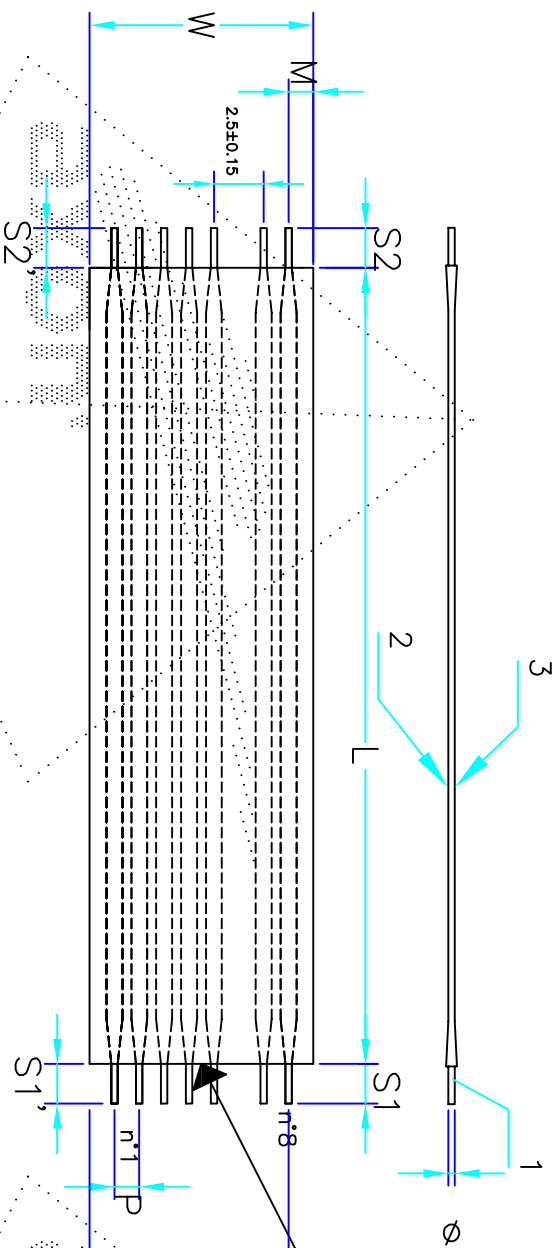

Note : possible trouble for adhesion around round conductor in window area with Kapton tape insulation.

CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	250 Ohm/km maxi	—
Conductor to conductor insulation resistance	10 MOhm.m mini	200 V DC
Dielectric test (conductor to conductor)	1 minute	500 V AC
Temperature rating	125 °C	—
Voltage rating	200 V AC maxi	—
Current rating	1,5 A maxi	—
Flame resistance	VW - 1	UL 758

DIMENSIONS

ITEMS	UNITS	SPECIFICATIONS
Number of conductors	8	
Pitch	MM	1,25 ± 0,15
Span	MM	8,75 ± 0,20
Total width	MM	11,25 ± 0,15
Margin	MM	1,25 ± 0,20
Strip length	MM	2,50 ± 1,00
Strip length	MM	2,50 ± 1,00
Insulated length	MM	30,00 ± 2,00
Strip difference S-S'	MM	0,40 max

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	Item
Conductor	Material	—	—
Conductor	Dimensions	MM	AWG 28 - 0.80X0.10 for flat part
Insulation	Material	—	Polimide+ adhesive insulation
Insulation	Thickness	MM	0,075 mm nominal

PRELIMINARY DRAWING

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS : MM ANGLES : d.

AXON
CABLE & INTERCONNECT

51210 MONTMIRAIL - FRANCE
TEL : +33 3 26 81 70 00
FAX : +33 3 26 81 28 83
www.axon-cable.com

AXON'CABLE SA

CUSTOMER N° Ineltro

FILE N° Su12494.dwg

RFC1.25C08/0030X2.5-2.5-0.0-0.0SA-/-/ - 1 cond special

SIZE A4

AXON' N° Su12494

REV A Prod. Doc.

SCALE : N.D.

SHEET 1 of 1