
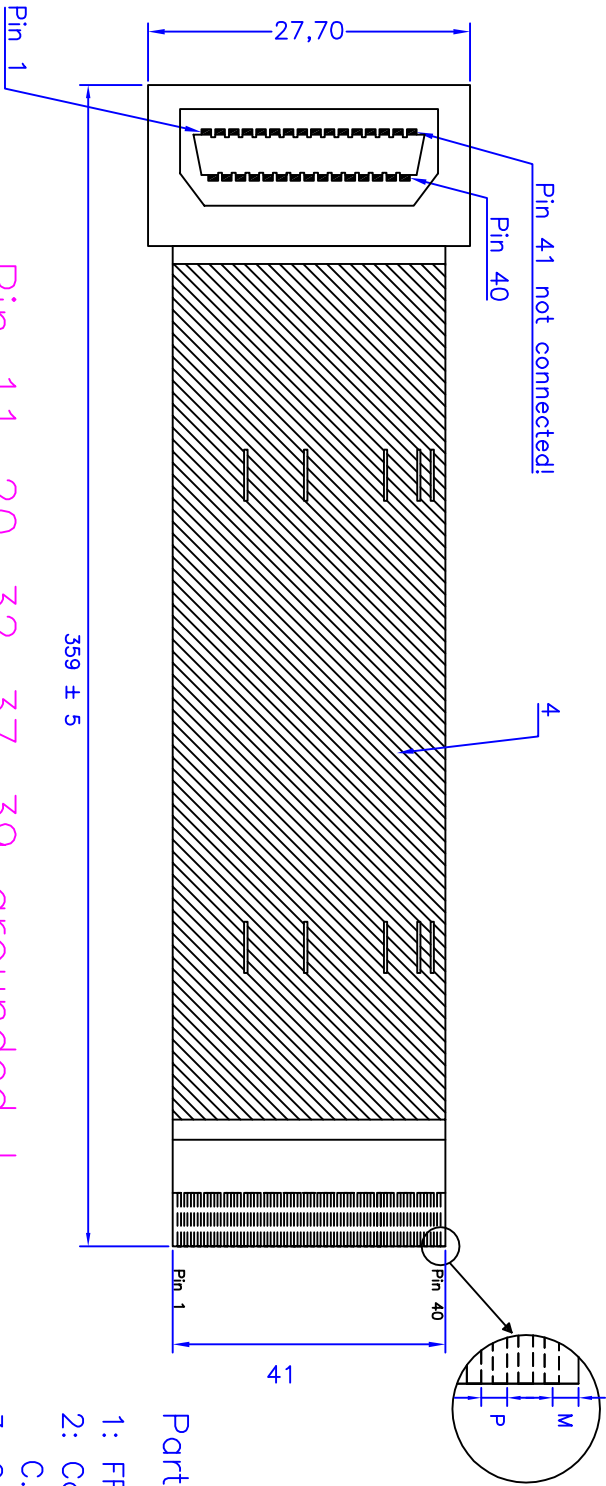


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DATE
A	Creation	JZ	ToH	27/02/13

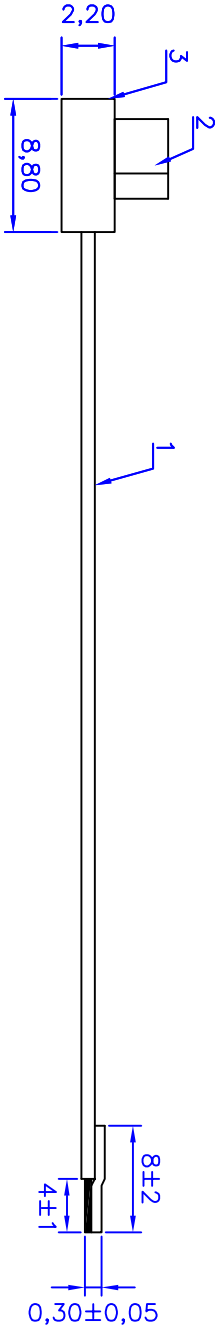


Pin 11–20–32–37–39 grounded !

Part list :

- 1: FFC cable 40 pins / pitch: 0.50 mm
- 2: Connector DF9 female 41 contacts : C.DF9C41S1V
- 3: Connector housing (black)
- 4: Conductive painting + varnish

Tests :

- Continuity
- Insulation resistance : 100 MOhms under 100V DC
- M=0.50 +0.15/–0.096 mm (Margin)
- P=0.50 ± 0.05 mm (Pitch)
- Temperature rating : 80°C
- voltage rating : 60 V

UNLESS OTHERWISE SPECIFIED DIMENSIONS : MM ANGLES : d. Fold tolerance: dimension ±2mm angle ±6°		 axon' KABEL & VERBINDUNGSSYSTEME AXON' KABEL GmbH 71229 LEONBERG TEL : +49 7152 97992-0 FAX : +49 7152 97882-86 www.axon-cable.com	
CUSTOMER N° PS-3255 FILE N° SJ13098A.dwg		TITLE : FDC40/0359DFZ28/PG11-20-32-37-39 (Pin 41 not connected)	
SIZE A4	AXON'SA N° SJ13098	REV A Prod.	SHEET 1 of 1
	SCALE : N.D.		