



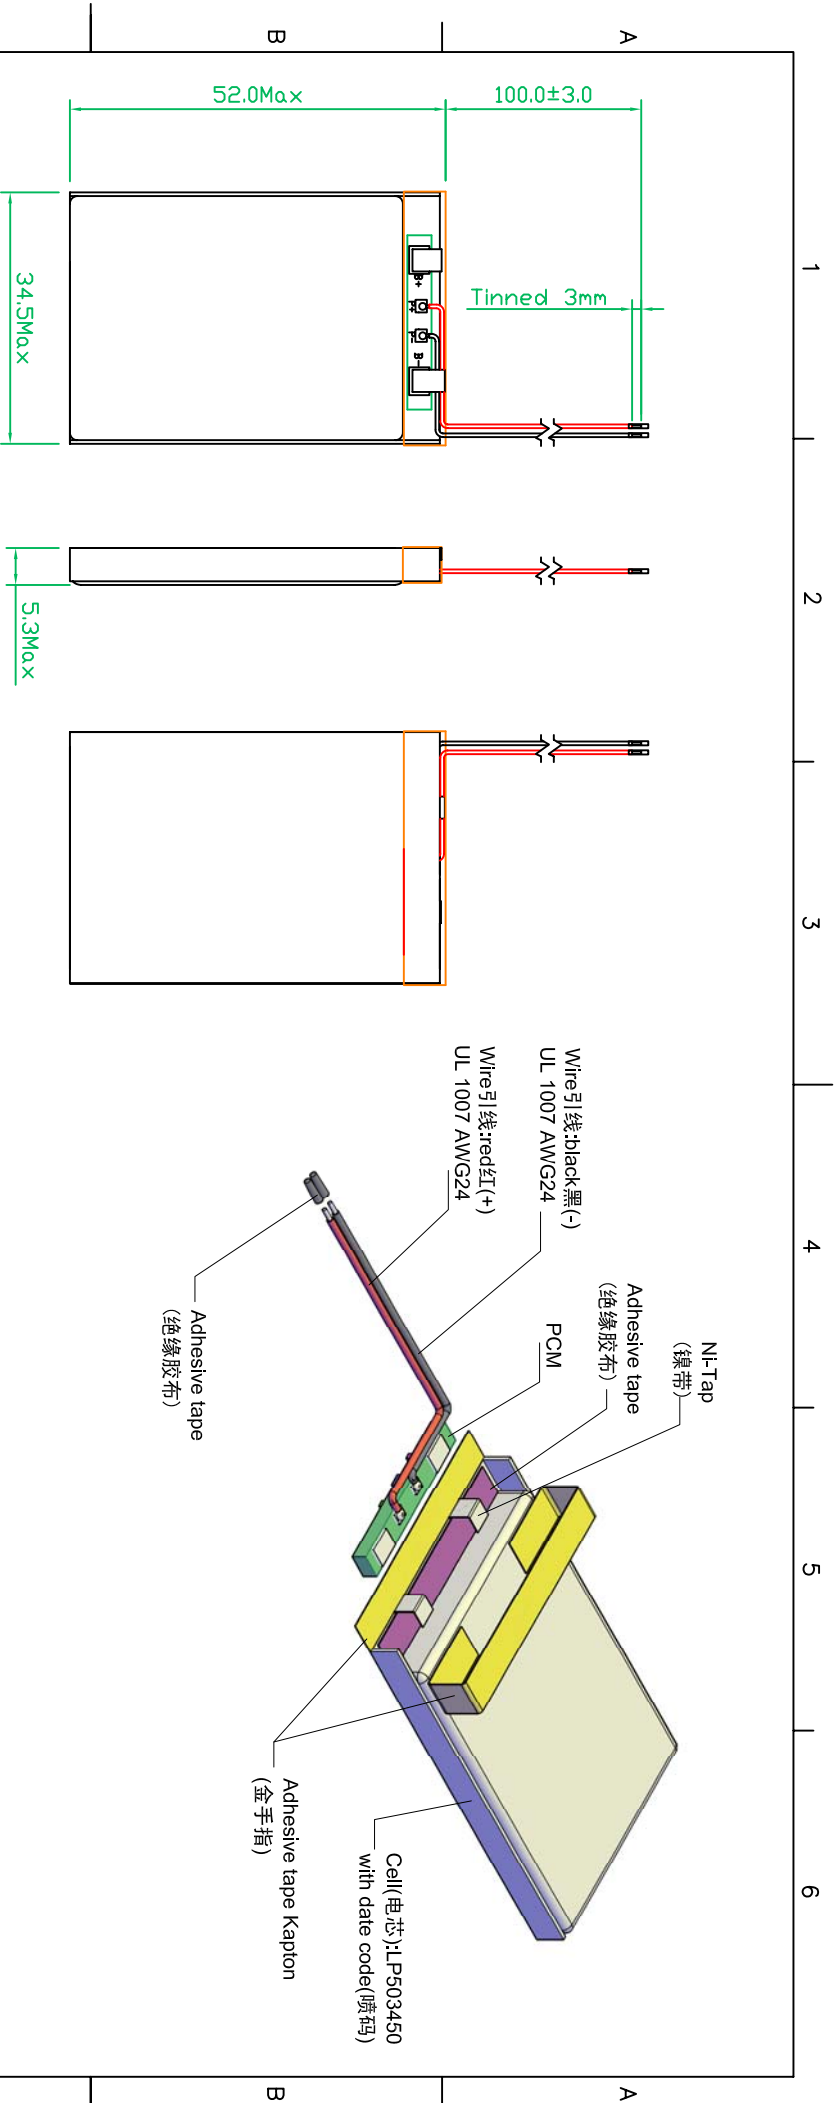

Cell(电芯):	LP503450		Date code(喷码):		Inner controlling standard(内控标准)	
	Battery Specification (电池参数)	Min.Capacity 最低容量(mAh) (0.2C,25±3°C)	900	*PCM protection (保护板参数)	Overcurrent Detection(A)	
		*Single battery capacity (单体电池容量)			(过流值)	
		Typical Capacity 典型容量(mAh) (0.2C,25±3°C)	950		Overcharge Detection Voltage(V)	
		*Single battery capacity (单体电池容量)			Overdischarge Detection Voltage(V) (过放保护电压)	
Ambient Conditions (工作环境)	Nominal Voltage 标称电压(V)		3.7	Charge Temp.充电温度(°C)	0-45	
	Internal impedance 内阻(≦)		200		Discharge Temp.放电温度(°C)	
					Humidity(湿度)	

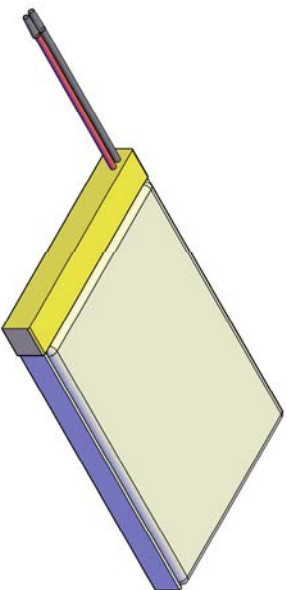

EEMB[®] EEMB BATTERY		Drawn:	Moyongdi	Revise No.:	E4-2009
Title	LP503450-PCM-LD	Checked 1:	Dolly	Projection:	
		Checked 2:	Keyan	Page:	1/1
		Approved:		Scale:	1 : 2
File NO.	A02892	Draw Date:	2010/03/04	Unit:	mm

Remark(备注):

1. No scratch, distortion, discoloration and leakage on the appearance of the cell(电池表面无划痕、变形、污点及漏液等现象).

2. Rohs compliant(严格按照ROHS要求生产).