

PSZ-1011

EMV-Filter für Chassis- und DIN-Rail-Montage


EMC filter for chassis and DIN Rail mounting

Technische Daten / Technical data

Eingangsspannung / input voltage	85...264 V
Nominalstrom / Nominal current	max. 0,5 A
Dämpfung / attenuation	ca. 20 dB
Betriebstemp. / Operating temp.	-30...+80 °C
Lagertemp. / Storage temp.	-50...+120 °C
Gewicht (netto) / Weight (net)	
Chassis-Montage / Chassis mounting	0,1 kg
DIN-Rail-Montage / DIN Rail mounting	0,14 kg
Gehäusematerial / Chassis material	Plastik / Plastics (UL94-V0)




Gehäuse-Zeichnung PSZ-1011 / Drawing PSZ-1011

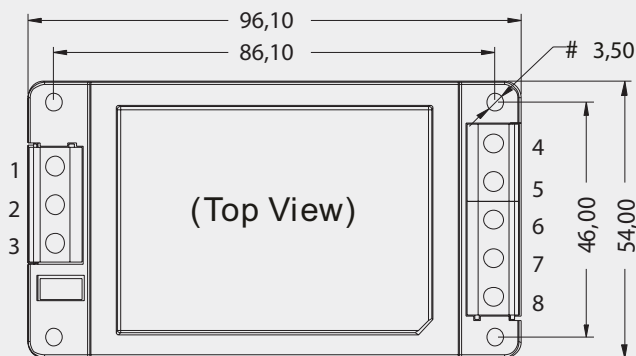

PIN-Belegung / Pin assignment

1	GND
2	IN (N)
3	IN (L)
4	OUT (N)
5	N.C.
6	N.C.
7	N.C.
8	OUT (L)

Chassis-Montage / Chassis mounting

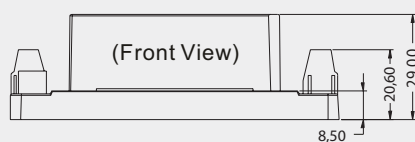

DIN-Rail-Montage / DIN Rail mounting

DIN-Rail-Montageplatte für Chassis-Montage abnehmbar
 DIN Rail mounting plate removable for chassis mounting

