

X Scale : 5,1
Y Scale : 15


Index	Modifications	Drawn.	Check.	Date
A	Creation	JZ	ToH	16/01/2015
B	new marking	ToH	JZ	26/03/2015

CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	730 Ohm/km max	23°C
Insulation resistance (conductor to conductor)	10 MOhm.m min	200 V DC
Dielectric test (conductor to conductor)	1 minute	200 V AC
Temperature rating	105 °C max	UL20706
Voltage rating	60 V AC max	UL20706
Flame resistance	VW - 1	UL 758

DIMENSIONS

ITEMS	SPECIFICATIONS
Number of conductors	10
Pitch	0.50 ± 0.05
Span	E 4.50 ± 0.10
Total width	W 5.50 ± 0.06
Margin	M 0.50 ± 0.15 / - 0.096
Strip length	S1 3.0 ± 0.8
Strip length	S2 3.0 ± 0.8
End thickness	T1 0.30 ± 0.05
End thickness	T2 0.30 ± 0.05
Insulated length	L 164 ± 4
Reinforcement length	F1 6.0 ± 2.0
Reinforcement length	F2 6.0 ± 2.0
Strips differences S-S'	0.3 max

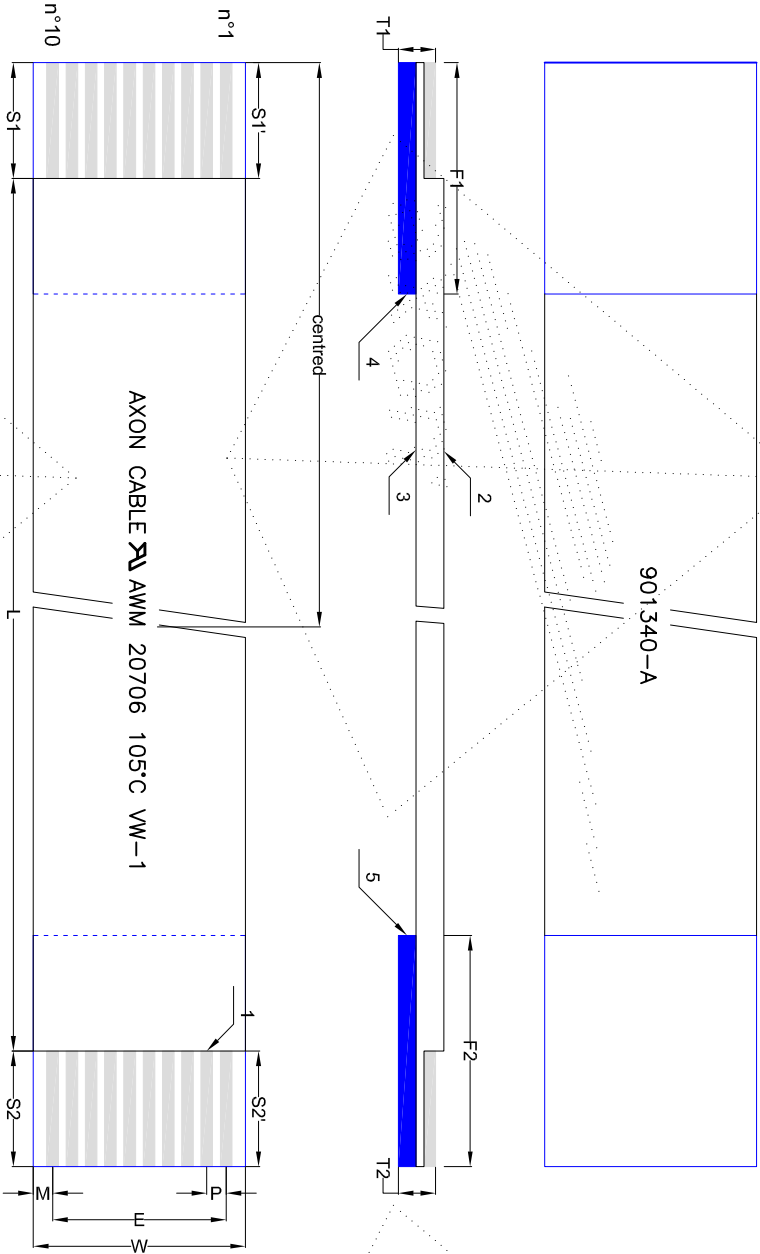

Marking (on side 3):		
Ink jet marking	: 901340-A	
Ink	Ink jet black	Height : 2,5 mm
Marking (on side 2):		Position : centred
Ink jet marking : AXON CABLE 901340-A AWM 20706 105°C VW-1		
Ink	Ink jet black	Height : 2,5 mm
		Position : centred


COMPOSITION

ITEM	COMPONENTS	MATERIAL	DIMENSIONS (nominal in mm)
1	Conductor	Tin plated copper (2µm min)	0.3 x 0.1
2	Insulation	Polyester (White)	0.073
3	Insulation	Polyester (White)	0.073
4	Reinforcement tape	Polyester (Blue)	0.155
5	Reinforcement tape	Polyester (Blue)	0.155

UNLESS OTHERWISE SPECIFIED DIMENSIONS: mm / ANGLES: °



AXON KABEL GmbH
POSTFACH 1131 D - 71209 LEONBERG
HERTICHSTR. 43D - 71229 LEONBERG
EMAIL: sales@axon-cable.de
TEL: +49 7152-97992-0
www.axon-cable.com

Customer 901340-A	Sj15029B
CAD Number Sj15029B.dwg	
	N. AXON'
	FFC0.50A10/0164B3.0-3.0-06.0-06.0SBKK/M