




X Scale : 5,1
Y Scale : 15

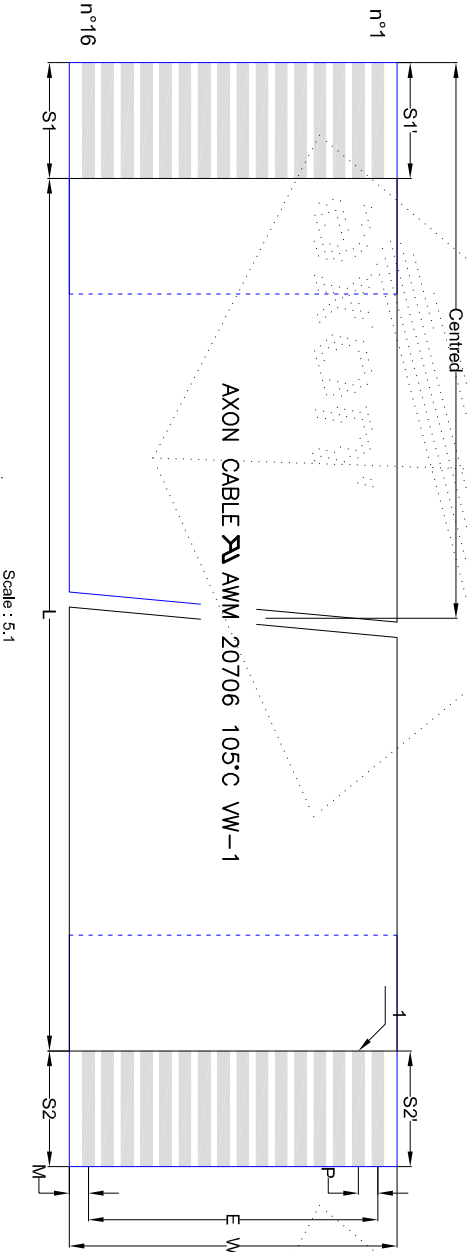

Scale : 5,1

Ink jet marking : AXON CABLE AWM 20706 105°C VW-1		
Ink : Ink Jet black	Height : 2,5 mm	Position : centred

COMPOSITION

ITEM	COMPONENTS	MATERIAL	DIMENSIONS (nominal in mm)
1	Conductor	Tin plated copper (2µm min)	0.3 x 0.1
2	Insulation	Polyester (White)	0.073
3	Insulation	Polyester (White)	0.073
4	Reinforcement tape	Polyester (Blue)	0.155
5	Reinforcement tape	Polyester (Blue)	0.155

Index	Modifications	Drawn.	Check.	Date
A	Creation	JZ	***	30/04/2014

CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	730 Ohm/km max	23°C
Insulation resistance (conductor to conductor)	10 MOhm.m min	200 V DC
Dielectric test (conductor to conductor)	1 minute	200 V AC
Temperature rating	105 °C max	UL 20706
Voltage rating	60 V AC max	UL 20706
Flame resistance	VW - 1	UL 758

DIMENSIONS

ITEMS	SPECIFICATIONS
Number of conductors	16
Pitch	P 0.50 ± 0.05
Span	E 7.50 ± 0.10
Total width	W 8.50 ± 0.06
Margin	M 0.50+ 0.15 / - 0.096
Strip length	S1 3.0 ± 0.8
Strip length	S2 3.0 ± 0.8
End thickness	T1 0.30 ± 0.05
End thickness	T2 0.30 ± 0.05
Insulated length	L 60 ± 2
Reinforcement length	F1 6.0 ± 2.0
Reinforcement length	F2 6.0 ± 2.0
Strips differences S-S'	0.3 max

UNLESS OTHERWISE SPECIFIED DIMENSIONS: mm / ANGLES: °



AXON[®] KABEL GmbH
POSTFACH 1131 D - 71209 LEONBERG
HERTICHSTR. 43D - 71229 LEONBERG
EMAIL: sales@axon-cable.de
TEL: +49 7152-97992-0
www.axon-cable.com

Customer	-	N. AXON [®]
CAD Number	010791.dwg	
		FFC0.50A16/0060B3.0.3-0-06.0-06.0SBKK

010791