


Index	Modifications	Drawn.	Check.	Date
A	Creation	ToH	***	18/06/2014

X Scale : 2.5
Y Scale : 15

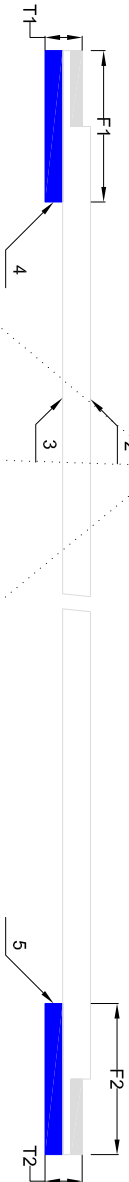


CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	300 Ohm/km max	23°C
Insulation resistance (conductor to conductor)	10 MOhm.m min	400 V DC
Dielectric test (conductor to conductor)	1 minute	400 V AC
Temperature rating	105 °C max	UL 20706
Voltage rating	60 V AC max	UL 20706
Flame resistance	VW - 1	UL 758

DIMENSIONS

ITEMS	SPECIFICATIONS
Number of conductors	8
Pitch	P 1.00 ± 0.08
Span	E 7.00 ± 0.15
Total width	W 9.00 ± 0.10
Margin	M 1.00 ± 0.20
Strip length	S1 4.0 ± 0.8
Strip length	S2 4.0 ± 0.8
End thickness	T1 0.30 ± 0.05
End thickness	T2 0.30 ± 0.05
Insulated length	L 112 ± 4
Reinforcement length	F1 8.0 ± 2.0
Reinforcement length	F2 8.0 ± 2.0
Strips differences S-S'	0.4 max

Scale : 2.5

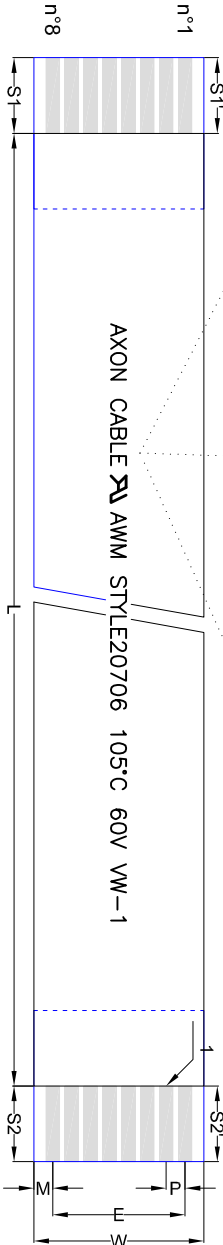

Ink jet marking on side itemized 3 : AXON CABLE AWM STYLE20706 105°C 60V VW-1

Ink : Ink Jet black Height : 2,5 mm Position : centred

COMPOSITION

ITEM	COMPONENTS	MATERIAL	DIMENSIONS (nominal in mm)
1	Conductor	Tin plated copper (2µm min)	0.7 x 0.1
2	Insulation	Polyester (White)	0.073
3	Insulation	Polyester (White)	0.073
4	Reinforcement tape	Polyester (Blue)	0.155
5	Reinforcement tape	Polyester (Blue)	0.155

UNLESS OTHERWISE SPECIFIED DIMENSIONS: mm / ANGLES: °



AXON[®] KABEL GmbH
POSTFACH 1131 D - 71209 LEONBERG
HERTICHSTR. 43D - 71229 LEONBERG
EMAIL: sales@axon-cable.de
TEL: +49 7152-97992-0
www.axon-cable.com

010884A

Customer N°
File N°
010884A.dwg

N. AXON[®]

FFC1.00A08/0112B4.0-4.0-08.0-08.OSBKK