


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DATE
AA	CREATION	TOH	***	31/08/2010

CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	280 Ohm/km maxi	—
Conductor to conductor insulation resistance	10 MOhm.m mini	500 V DC
Dielectric test (conductor to conductor)	1 minute	400 V AC
Temperature rating	80 °C maxi	—
Voltage rating	30 V AC maxi	—
Flame resistance	VW — 1	UL 758

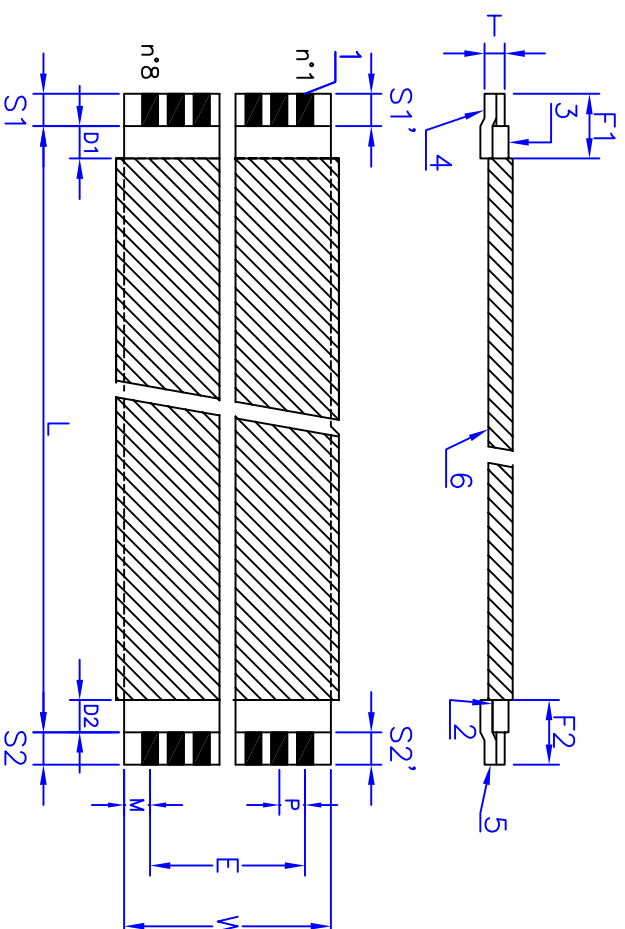

DIMENSIONS

ITEMS	UNITS	SPECIFICATIONS
Number of conductors	—	8
Pitch	MM	1,00 ± 0,08
Span	MM	7,00 ± 0,15
Total width	MM	9,00 ± 0,10
Margin	MM	1,00 ± 0,20
Strip length	MM	4 ± 0,8
Strip length	MM	4 ± 0,8
End thickness	MM	0,30 ± 0,05
Insulated length	MM	532 ± 5
Reinforcement length	MM	8 ± 2
Strip difference S-S'	MM	0,40 max
Shield position	MM	4 ± 3
Shield position	MM	4 ± 3

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	Item
Conductor	Material	—	—
	Dimensions	MM	0,70x0,10 mm nominal
Insulation	Material	—	Polyester+flame retardant adhesive insulation
	Thickness	MM	0,115 mm nominal
Reinforcement	Material	—	Blue polyester
	Thickness	MM	0,23 mm nominal
Aluminum	Material	—	Polyester film/Adhesive/Aluminium/Adhesive
	Thickness	MM	0,03 mm nominal
Tape	Thickness	MM	0,03 mm nominal

UNLESS OTHERWISE SPECIFIED
DIMENSIONS : MM ANGLES : d.




axon'
KABEL & VERBINDUNGSSYSTEME

AXON' KABEL GmbH
71229 LEONBERG
TEL : +49 7152 97992-0
FAX : +49 7152 97882-86
www.axon-cable.com

CUSTOMER N°
Cedes 109939

FILE N°
008189A.dwg

TITLE :
FFC1.00A08/0532L4.0-4.0-08.0-08.0SABB/S



SIZE
A4

AXON'SA N°
008189

SCALE : N.D.

REV
A
Prod. Doc.
SHEET 1 of 1