


CU24063-Y1A

SIMPLIFIED DATASHEET

■ Features

24 character x 6 line display.
Compact, but capable of displaying large amount of text.

■ Physical dimension

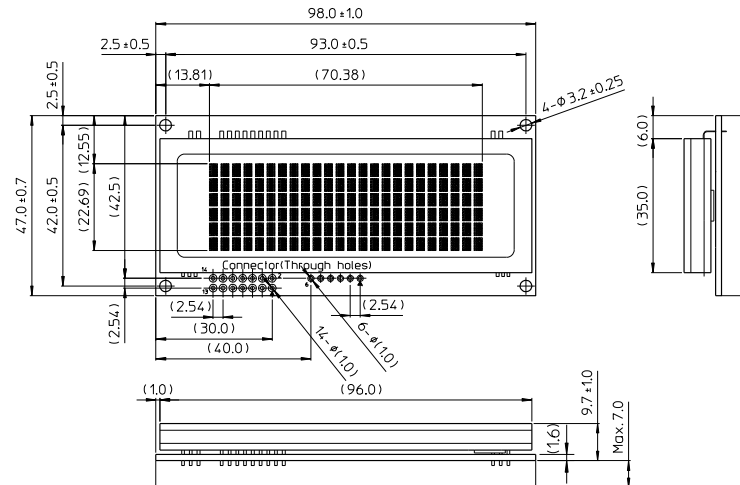

() : Reference only
Unit : mm

Get full specification



Click here to go to request form.

Specifications

■ Electrical Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Power supply Voltage	VCC	4.75	5.00	5.25	VDC	-

■ Electrical Characteristics

#1: Brightness 100% #2: Brightness 200%

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
'L' Logic Input Current D0-D7, /WR, /RESET	IIL1	-	-	-0.15	mA	VIN=0V
SIN, SCK	IIL2	-	-	-0.55	mA	VIN=0V
'H' Logic Input Current D0-D7, SIN, SCK	IiH1	-	-	5.0	μA	VIN=5V
/WR, /RESET	IiH2	-	-	0.25	μA	VIN=5V
'L' Logic Input Voltage D0-D7, /WR, SIN, SCK	VIL1	0	-	0.2VCC	VDC	-
/RESET	VIL2	0	-	0.8	VDC	-
'H' Logic Input Voltage D0-D7, /WR, /RESET, SIN, SCK	VIH	0.8VCC	-	VCC	VDC	-
'L' Logic Output Voltage PBUSY	VOL1	-	-	0.1	VDC	IOL=50 μA
SBUSY	VOL2	-	-	0.45	VDC	IOL=200 μA
'H' Logic Output Voltage PBUSY	VOH1	VCC-0.1	-	-	VDC	IOH=-50 μA
SBUSY	VOH2	VCC-0.5	-	VCC	VDC	IOH=-200 μA
Power Supply Current #1	ICC1-1	-	320	400	mADC	Display ON
Power Supply Current #1	ICC2-1	-	260	330	mADC	Display OFF
Power Supply Current #2	ICC1-2	-	420	530	mADC	Display ON
Power Supply Current #2	ICC2-2	-	310	390	mADC	Display OFF
Power Supply Current #3	ICC3	-	25	35	mADC	Disp. Power OFF
Power Consumption #1	-	-	1.6	2.0	W	Display ON
Power Consumption #2	-	-	2.1	2.65	W	Display ON

■ Optical Characteristics

#1: Brightness 100% #2: Brightness 200%

Parameter	
Luminance	350 cd/m ² Min. #1 1000 cd/m ² Typ. #2 2000 cd/m ² Typ.
Color of illumination	Green (Blue-Green)

■ Environmental Conditions

Parameter	
Operating Temperature	-40 ~ +85 degrees celsius
Storage Temperature	-40 ~ +85 degrees celsius
Operating Humidity	20 ~ 80% R.H. (non-condensing)
Storage Humidity	20 ~ 80% R.H. (non-condensing)
Vibration (Non operation)	10-55-10Hz, all amplitude 1mm, 30 minutes, X-Y-Z
Shock (Non operation)	392m/s ² (40G) 9ms X-Y-Z, 3 times each direction

■ Physical Specifications

Parameter	*ANK(Alphabet, Numeric, Kana)
Number of Char.	144 (24characters x 6 lines)
Built-in Fonts	5 x 8 ANK, International font
Display Area	70.38 x 22.69 mm (X x Y)
Character Size	2.07 x 3.34 mm (X x Y)
Character Pitch	2.97 mm
Line pitch	3.87 mm
Weight	About 56 g

■ Interface

Parallel (CMOS), Sync/Asynchronous Serial (CMOS)

■ Pin Assignment (Parallel)

Pin No	Signal	Pin No	Signal
1	GND	2	Vcc
3	PBUSY	4	/RESET
5	/WR	6	NC
7	D0(LSB)	8	D1
9	D2	10	D3
11	D4	12	D5
13	D6	14	D7(MSB)

(Serial)

Pin No	Signal	Pin No	Signal	Baud Rate Setting
1	Vcc	1	Vcc	9600bps
2	SIN	2	SIN	19200bps
3	GND	3	GND	38400bps*
4	SBUSY	4	SBUSY	115200bps
5	SCK	5	NC	(*:Default setting)
6	/RESET	6	/RESET	

■ Functions

Parameter
Highlight Function
Font Magnification
Horizontal scroll mode
Blink ON/OFF
Power save mode
Screen saver
Cursor, Underline ON/OFF
User Font function
etc.