



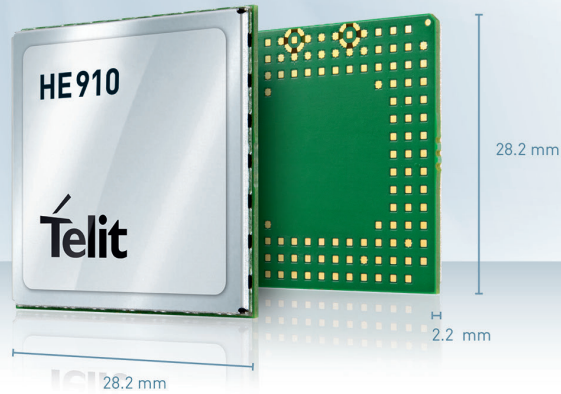

●● HE910



Product Description

The HE910 is our most compact multi-band HSPA+ LGA module series, with built-in GPS and GSM/EGPRS fallback at 28x28mm. As a member of the xE910 LGA unified form factor family the HE910 series is pin-to-pin compatible with LTE, HSPA, GSM/GPRS and CDMA/EVDO xE910 family counterparts.

Featuring seven-band HSPA+ data rates of up to 21 Mbps (Cat 14) downlink and 5.7 Mbps (Cat 6) uplink, ideal for high performance global roaming.

The HE910 series is well-suited for a wide range of industrial and consumer applications with high data throughput requirements, including, asset & fleet tracking, in-car telematics, PDAs, security surveillance, personal navigation devices, e-readers and consumer electronics in general. Several variants are offered, ranging from low cost tri-band models with reduced throughput, to fully-loaded configurations including receiver diversity and high sensitivity A-GPS functionality.

Key Benefits

- Seven-band HSPA+ for worldwide coverage
- Design once and deploy globally, thanks to xE910 unified form factor
- LGA package ideally suited for low profile integrated solutions, reducing cost in high-volume applications, as well as saving space and weight in portable devices
- Optional GPS ideal for applications requiring indoor fixes and simultaneous GPS with voice and data
- Perfect platform for a wide range of applications requiring HSPA connectivity

Family Concept

The xE910 Unified Form Factor family is comprised of pin-to-pin compatible modules in Telit's broadest range of cellular air interfaces and band combinations making it a pillar of the concept "design once and deploy globally".

A one-time design and integration effort enables worldwide or regional device re-use across different data rates and wireless technologies with air interfaces in GSM/GPRS, UMTS/HSPA+, 1xRTT, EV-DO, and LTE (pre-release).

The xE910 family was conceived to enable applications to be easily upgraded in a number of ways. For example: migrating from 2G to 3G or 4G; or upgrading from 2 bands to 3, 4, or more. The family fully preserves the core design of the application or device from launch to phase-out with modules packaged in a common 28.2x28.2 mm LGA footprint. It is recommended for mid to high-volume, compact sized applications.

Telit m2mLOCATE

m2mLOCATE is a Telit cloud-based service that provides a device's position based on observed cellular Cell-IDs. Accessing a database of over 40 million cell-IDs globally, m2mLOCATE can provide a position for every use-case including indoors/underground, outdoors, and boundary situations.



m2mAIR Ready

This product is capable of supporting the extensive suite of m2mAIR value-added services and connectivity you can use to enhance your application and boost your competitive advantage.

Find more information on www.m2mair.com

AVAILABLE FOR

- EMEA
- North America
- Latin America
- APAC
- Korea
- Australia

Combine your Cellular module with

- Short Range modules



www.telit.com

Complete, Ready to Use Access to the Internet of Things



Telit Modules + m2mAIR Value-Added Services including Connectivity



by Telit m2m experts

www.m2mAIR.com

ONE STOP.
ONE SHOP. NOW, INNOVATE!



HE910

	HE910-G*	HE910-DG*	HE910-D	HE910-EUR	HE910-EUD	HE910-EUG	HE910-NAR	HE910-NAD	HE910-NAG
Market	GLOBAL	GLOBAL	GLOBAL	EMEA / APAC / Latinamerica	EMEA / APAC / Latinamerica	EMEA / APAC / Latinamerica	North America	North America	North America
Upload HSUPA (Mbps)	5.76	5.76	5.76	5.76	5.76	5.76	5.76	5.76	5.76
Download HSDPA (Mbps)	21.0	21.0	21.0	7.2	7.2	7.2	7.2	7.2	7.2
Frequencies UMTS HSPA+ bands (MHz)	800/850, 900, AWS 1700,1900,210	800/850, 900, AWS 1700,1900,210	800/850, 900, AWS 1700,1900,210	800/850, 900, 2100	800/850, 900, 2100	800/850, 900, 2100	800/850, AWS1700, 1900	800/850, AWS1700, 1900	800/850, AWS1700, 1900
Features									
GSM GPRS EDGE Quad-band	●	●	●	●	●	●	●	●	●
Rx Diversity	●	●	●						
Data	●	●	●	●	●	●	●	●	●
Voice	●			●			●		
GPS	●	●				●			●

* HE910-G and HE910-DG are certified under the Model and Marketing Name "HE910"

Product features

- Supported frequencies
 - GSM / GPRS / EDGE: 850, 900, 1800, 1900
 - UMTS / HSPA: 800/850*, 900, AWS1700, 1900, 2100 MHz
 - * Bands B6 and B19 (800 MHz) are a subset of B5 (850 MHz) and supported as well.
- HSPA+ data up to 21.0 Mbps downlink / 5.76 Mbps uplink
- Quad Band GPRS and EDGE
- Optional GPS
- Rx Diversity
- Extended temperature range: specify temp range -40 +85°C
- SIM Access Profile
- 3GPP release 7 compliant
- Control via AT commands according to 3GPP TS 27.005, 27.007 and Telit custom AT commands
- Serial port multiplexer 3GPP TS27.010
- SIM application Tool Kits 3GPP TS 51.014
- Built in UDP/TCP/FTP/SMTP stack
- Digital voice and SMS
- IP stack with TCP and UDP protocol
- eCall compliant
- Standard and extended AT command set

- Downlink up to 21.0 Mbps (high-end variants)
- Downlink up to 7.2 Mbps (low-end variants)

- SPI
- I2C
- 1.8 V / 3 V SIM interface

Environmental

- Dimensions 28.2 x 28.2 x 2.2 mm

Optional GPS Receiver

- SUPL 1.0
- High sensitivity for indoor reception, better than -165 dBm with A-GPS
- GPS Cold Start Autonomous (acquisition sensitivity) -147 dBm
- GPS Hot Start Autonomous -161 dBm
- GPS tracking mode -166 dBm
- Accuracy 3 m
- TTFF from Cold Start 42 s
- TTF from Warm Start 30 s
- TTF from Hot Start 1.8 s
- Supports multi-channel GPS
- L1 1575.42 MHz
- GPS NMEA 0183 output format
- Datum WGS-84
- Dedicated GPS AT commands

Interfaces

- 10 I/O ports maximum including multifunctional I/Os
- I2S for digital Audio interface
- USB 2.0 HS
- 2 UART

Approvals

- CE, GCF (Europe)
- FCC, PTCRB, IC (North America)
- RoHS Compliant

Electrical & Sensitivity

- Output power
 - Class 4 (2 W, 33 dBm) @ GSM 850 / 900
 - Class 1 (1 W, 30 dBm) @ GSM 1800 / 1900
 - Class 3 (0.25 W, 24 dBm) @ UMTS
 - Class E2 (0.5 W, 27 dBm) @ EDGE 850 / 900
 - Class E2 (0.4 W, 26 dBm) @ EDGE 1800 / 1900
- Supply voltage
 - Nominal: 3.8 VDC
 - Range: 3.4 - 4.2 VDC
- Sensitivity
 - -111 dBm @ UMTS
 - -109 dBm @ GSM 850 / 900 MHz
 - -110 dBm @ DCS1800 / PCS1900 MHz

Software

- Python* version= 2.7.2
- Python* script interpreter (module takes the application code directly in the Python* language)
- Memory: 2MB of NV memory for the user scripts and 2 MB RAM for the Python engine usage

Data

HSPA category 6 in uplink and up to category 14 in downlink

- Uplink up to 5.76 Mbps

[01:20]13

Telit reserves all rights to this document and the information contained herein. Products, names, logos and designs described herein may in whole or in part be subject to intellectual property rights. The information contained herein is provided "as is". No warranty of any kind, either express or implied, is made in relation to the accuracy, reliability, fitness for a particular purpose or content of this document. This document may be revised by Telit at any time. For most recent documents, please visit www.telit.com
Copyright © 2013, Telit

* Copyright © 1990-2013, Python Software Foundation



Join the Telit Technical Forum

For a quicker and more rewarding integration experience join the Telit Technical Forum. There you can browse the first open forum covering all m2m topics, get direct support by region (EMEA, North America, Latin America, APAC), take part in this quickly growing m2m community and exchange experiences.

Telit Communications S.p.A.
Via Stazione di Prosecco, 5/B
I-34010 Sgonico (Trieste), Italy
Phone +39 040 4192 200
Fax +39 040 4192 383
E-Mail EMEA@telit.com

Telit Wireless Solutions Inc.
3131 RDU Center Drive, Suite 135
Morrisville, NC 27560, USA
Phone +1 888 846 9773 or +1 919 439 7977
Fax +1 888 846 9774 or +1 919 840 0337
E-Mail NORTHAMERICA@telit.com

Telit Wireless Solutions Inc.
Rua Paes Leme, 524, Conj. 126
05424-101, Pinheiros,
Sao Paulo-SP-Brazil
Phone +55 11 3031 5051
Fax +55 11 3031 5051
E-Mail LATINAMERICA@telit.com

Telit Wireless Solutions Co., Ltd.
12th Fl., Shinyoung Securities Bld.
34-12, Yeouido-dong, Yeongdeungpo-gu
Seoul, 150-884, Korea
Phone +82 2 368 4600
Fax +82 2 368 4606
E-Mail APAC@telit.com

www.telit.com
www.m2mAIR.com

www.telit.com/techforum
www.telit.com/facebook
www.telit.com/twitter