


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DATE
AA	CREATION	ToH	JZ	09/08/2011
BA	new design	JZ	ToH	11/01/2016

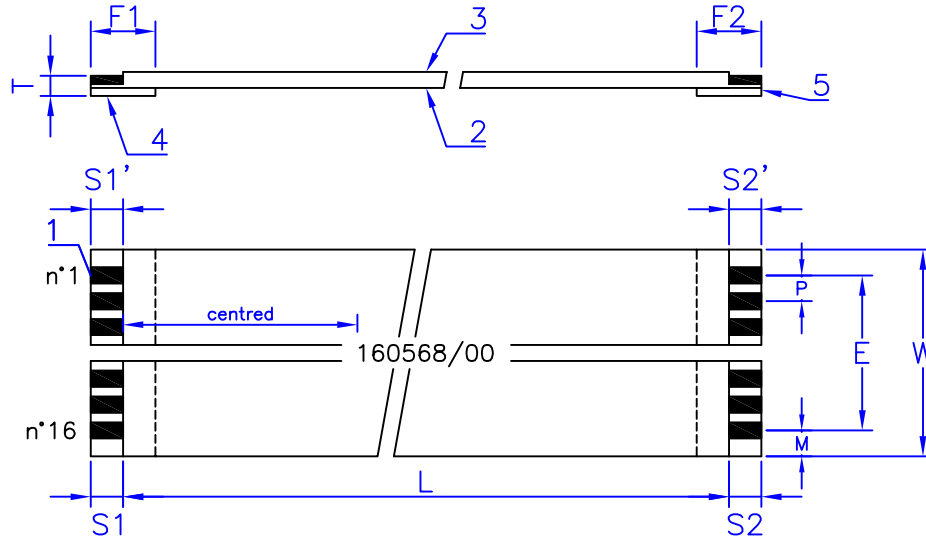

CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	520 Ohm/km maxi	—
Conductor to conductor insulation resistance	10 MOhm.m mini	500 V DC
Dielectric test (conductor to conductor)	1 minute	400 V AC
Temperature rating	105 °C	—
Voltage rating	60 V AC maxi	—
Flame resistance	VW — 1	UL 758


DIMENSIONS

ITEMS	UNITS	SPECIFICATIONS	
Number of conductors	—	16	
Pitch	MM	1,00 ± 0,08	P
Span	MM	15,00 ± 0,15	E
Total width	MM	17,00 ± 0,10	W
Margin	MM	1,00 ± 0,20	M
Strip length	MM	4 ± 0,8	S1
Strip length	MM	4 ± 0,8	S2
End thickness	MM	0,30 ± 0,05	T
Insulated length	MM	260 ± 5	L
Reinforcement length	MM	8 ± 2	F1
Reinforcement length	MM	8 ± 2	F2
Strip difference S-S'	MM	0,40 max	

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	Item
Conductor	Material	—	1
	Dimensions	MM	
Insulation	Material	—	2 3
	Thickness	MM	
Reinforcement tape	Material	—	4 5
	Thickness	MM	

Ink jet marking on side itemized 3 : 160568/00		
Ink : Ink Jet black	Height : 2,5 mm	Position : centred

UNLESS OTHERWISE SPECIFIED DIMENSIONS : MM ANGLES : d.		 axon' CABLE & INTERCONNECTIQUE		AXON'CABLE SAS 51210 MONTMIRAIL - FRANCE TEL : +33 3 26 81 70 00 FAX : +33 3 26 81 28 83 www.axon-cable.com				
FFC CAD 4.0/Janvier 2001/FrL-LM								
CUSTOMER N° 160568/00		TITLE :						
FILE N° SJ11457B.dwg		FFC1,00A16/0260S4,0-4,0-08,0-08,0FAJJ/M						
		SIZE		AXON'SA N°		REV		
		A4		SJ11457		B		A
		SCALE : N.D.				Prod.		
						SHEET 1 of 1		