

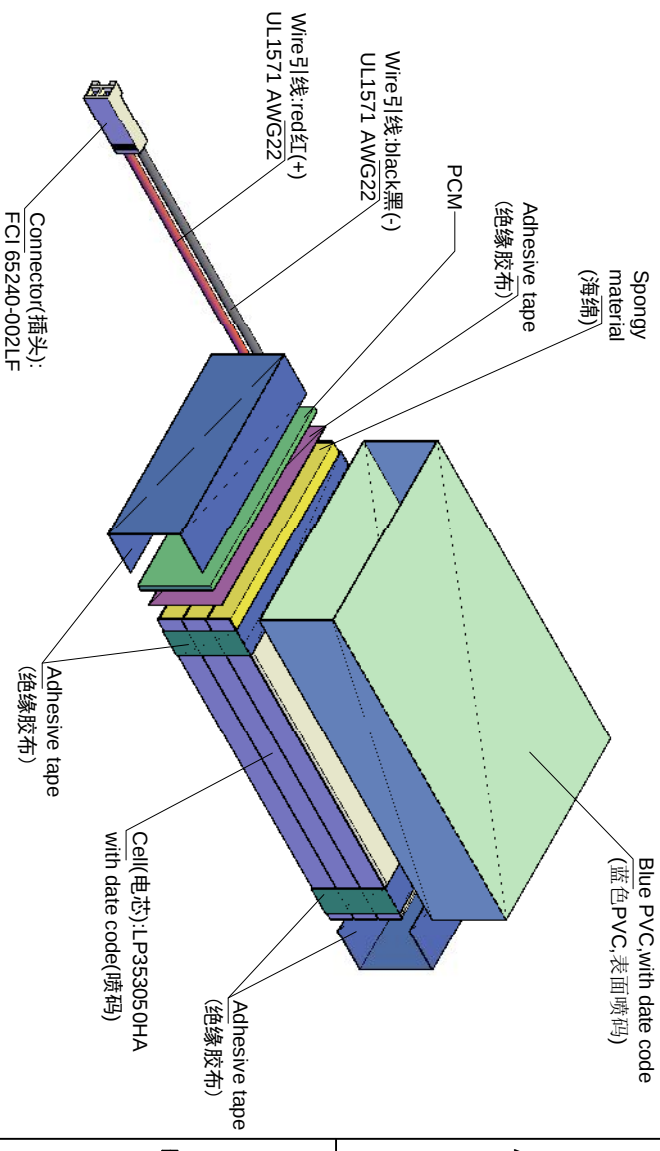



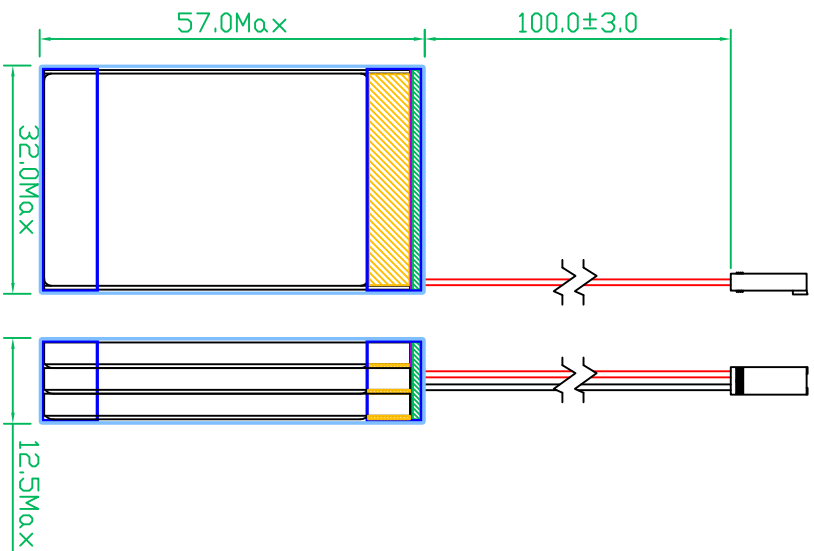

Model: 3LP353050HA		Overcharge Detection Voltage(V)		4.35±0.05
Battery pack specification (电池组规格)	Min.Capacity 最低容量 (mAh) (0.2C,25±3°C) <i>※Combination of battery capacity (组合电芯容量)</i>	Overdischarge Detection Voltage(V)		2.4±0.1
	Typical Capacity 典型容量 (mAh) (0.2C,25±3°C) <i>※Combination of battery capacity (组合电芯容量)</i>	过放保护电压 (V)		2.4±0.1
	Nominal Voltage 标称电压 (V)	Limited to Max loading current 仅用于最大的负载电流 peak value (A) 峰值 6.0 (A)		constant (A) 持续 2.0 (A)
	Internal impedance 内阻 (≦) (mΩ,AC 1KHz)	Customer required Max loading current 客户要求最大的负载电流 peak value (A) 峰值 (A)		constant (A) 持续 (A)
		If actual application loading current is bigger than EEMB suggested, please indicate. The application profile is important for an appropriate PCM design. (如果实际应用的负载电流大于 EEMB 提供值, 请提出来, 实际的应用情况对 PCM 的设计至关重要)		
Ambient Conditions (环境温度)		Charge Temp. 充电温度 (°C)		0~45
		Discharge Temp. 放电温度 (°C)		-20~60
		Humidity(湿度)		65±20%

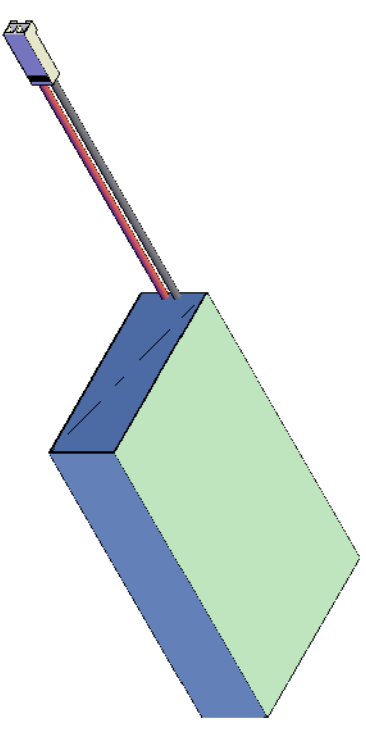

Title		Drawn:		Leiyuanchao		Revise No.:		E4-2009	
File NO.		A13959		Checked 1:		Annie		Projection:	
				Checked 2:				Page:	
				Approved:				Scale:	
				Draw Date:		2017/04/11		Unit:	
								1 : 1.5	
								mm	

Remark(备注):
1. No scratch, discoloration, discoloration and leakage on the appearance of the cell(电池表面无划痕、变形、污点及漏液等现象).
2. RoHS compliant(严格按照ROHS要求生产).