


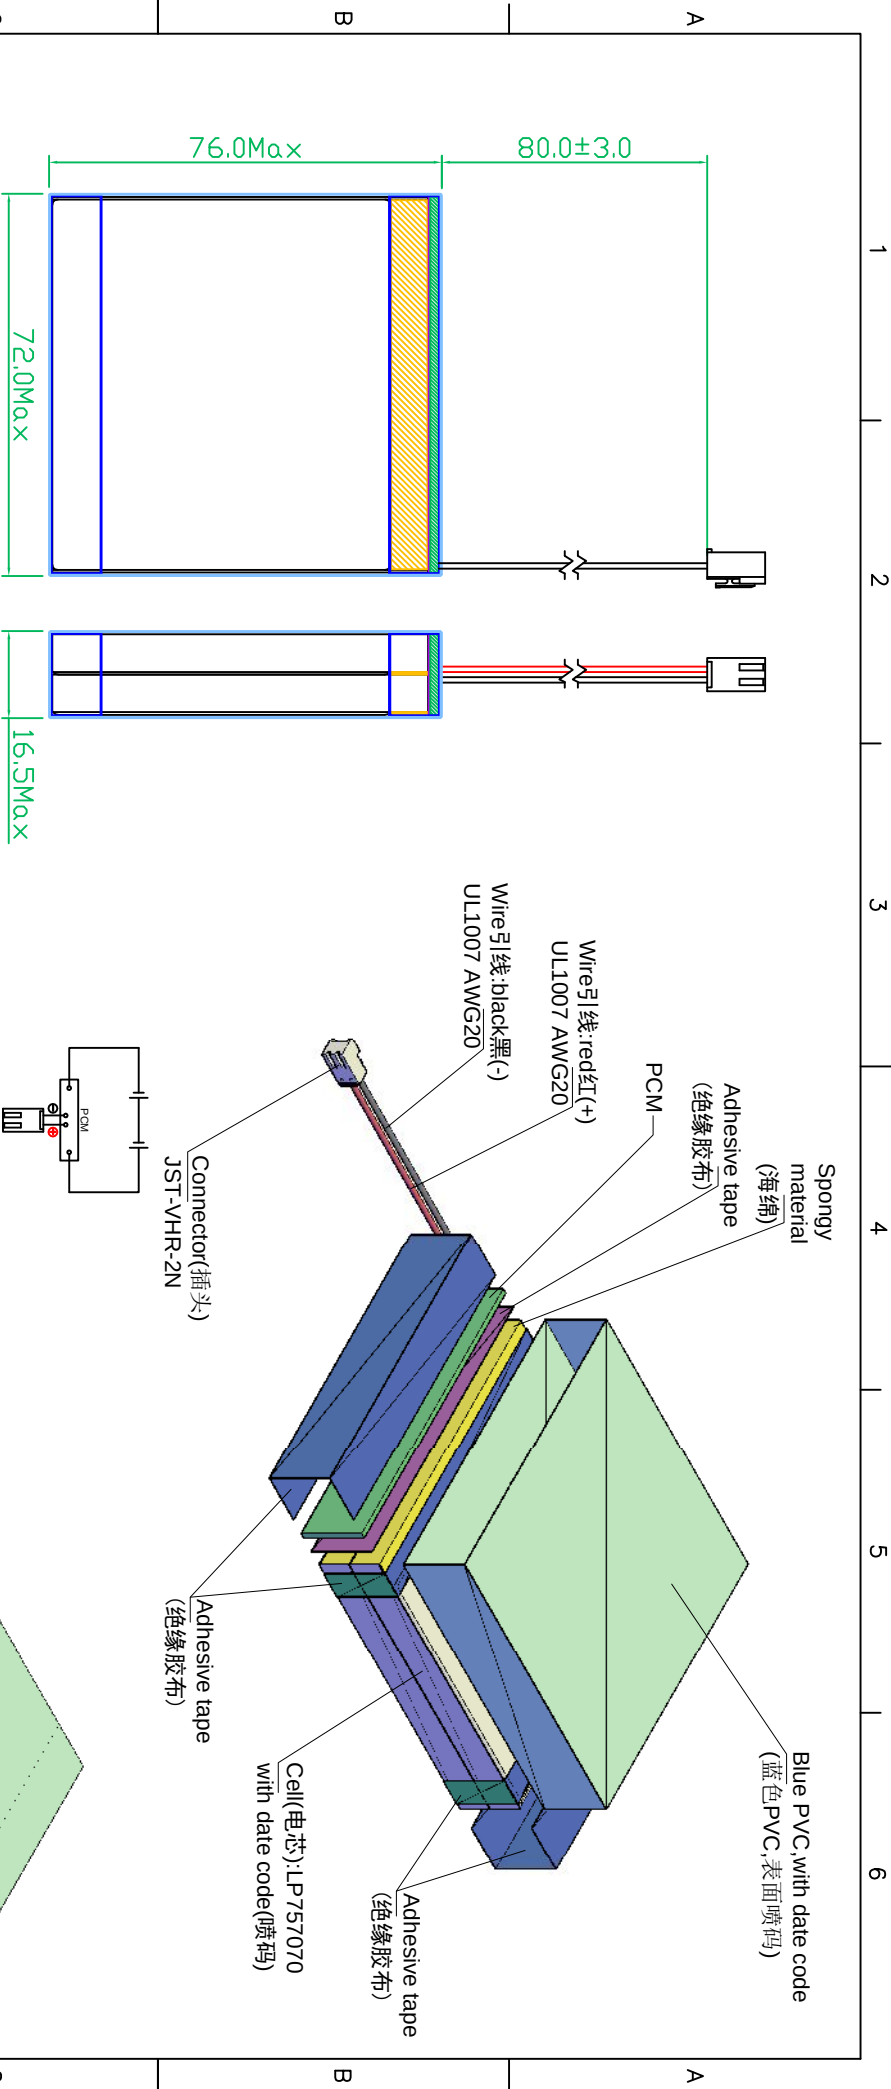

Battery pack specification (电池组规格)	Model:	2LP757070	Min. Capacity 最低容量 (mAh) (0.2C, 25±3°C) <i>※Combination of battery capacity (组合电池容量)</i>	4200
			Typical Capacity 典型容量 (mAh) (0.2C, 25±3°C) <i>※Combination of battery capacity (组合电池容量)</i>	4500
			Nominal Voltage 标称电压 (V)	7.4
			Internal impedance 内阻 (≦) (mΩ, AC 1KHz)	250
			Charge Temp. 充电温度 (°C)	0~45
Ambient Conditions (环境温度)	Discharge Temp. 放电温度 (°C)	-20~60	Battery protection Related Value: (相关的电池保护值)	
	Humidity (湿度)	65±20%		

Overcharge Detection Voltage (V)		4.30±0.05
Overdischarge Detection Voltage (V)		2.4±0.1
过放保护电压 (V)		2.4±0.1
Limited to Max loading current 仅用于最大的负载电流 peak value (A)		constant (A) 持续 4.0 (A)
Customer required Max loading current 客户要求最大的负载电流 peak value (A)		constant (A) 持续 8.0 (A)
If actual application loading current is bigger than EEMB suggested, please indicate. The application profile is important for an appropriate PCM design. (如果实际应用的负载电流大于 EEMB 提供值, 请提出来, 实际的应用情况对 PCM 的设计至关重要)		

Remark(备注):
1. No scratch, discoloration, discoloration and leakage on the appearance of the cell(电池表面无划痕、变形、污点及漏液等现象).
2. RoHS compliant(严格按照ROHS要求生产).

EEMB®

EEMB BATTERY

Title

2LP757070-PCM-LD/

File NO.

A13949

Drawn:

Leiyuanchao

Checked 1:

Annie

Checked 2:

Approved:

Draw Date:

2017/04/08

Revise No.:

E4-2009

Projection:

Page:

1/1

Scale:

1 : 1.5

Unit:

mm