

Approval Sheet

Customer	
Product Number	M3S0-8GMSDDPC
Module speed	PC3-12800
Pin	204 pin
Cl-tRCD-tRP	11-11-11
Operating Temp	-40°C ~85°C
Date	21st February 2018

**The Total Solution For
Industrial Flash Storage**

Rev 1.1

1. Features

Key Parameter

Industry Nomenclature	Speed Grade	Data Rate MT/s			CL	tRCD	tRP
		CL=7	CL=9	CL=11			
PC3-12800	P	1066	1333	1600	11	11	11

- JEDEC Standard 204-pin Small Outline Dual In-Line Memory Module
- Intend for PC3-12800 applications
- Inputs and Outputs are SSTL-15 compatible
- VDD=VDDQ= 1.35 Volt (-0.067/+0.1V) or 1.5 Volt ($\pm 0.075V$)
- Bi-directional Differential Data Strobe
- DLL aligns DQ and DQS transition with CK transition
- SDRAMs have 8 internal banks for concurrent operation
- Normal and Dynamic On-Die Termination support.
- SDRAMs are 78-ball BGA Package
- Gold Plating Thickness 30 μ "
- 8 bit pre-fetch
- Two different termination values (Rtt_Nom & Rtt_WR)
- Auto & self refresh 7.8 μ s ($T_C \leq +85^{\circ}C$)
- 16/10/2 Addressing (row/column/rank)-8GB
- SDRAM operating temperature range $-40^{\circ}C \leq T_{CASE} \leq +85^{\circ}C$
- Temperature Sensor with SPD EEPROM
- Programmable Device Operation:
 - Burst Type: Sequential or Interleave
 - Device CAS# Latency: 6,7,8,9,10,11
 - Burst Length: switch on-the-fly: BL=8 or BC 4
- RoHS Compliant (*Section 13*)

2. Environmental Requirements

DDR3L SODIMMs are intended for use in standard office environments that have limited capacity for heating and air conditioning.

Symbol	Parameter	Rating	Units	Notes
TOPR	Operating Temperature (ambient)	-40 to +85	°C	3
HOPR	Operating Humidity (relative)	10 to 90	%	
TSTG	Storage Temperature	-50 to +100	°C	1
HSTG	Storage Humidity (without condensation)	5 to 95	%	1
PBAR	Barometric Pressure (operating & storage)	105 to 69	K Pascal	1,2

Note 1 Stresses greater than those listed may cause permanent damage to the device. This is a stress rating only, and device functional operation at or above the conditions indicated is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.
 Note 2 Up to 9850 ft.
 Note 3 The component maximum case temperature (TCASE) shall not exceed the value specified in the DDR3 DRAM component specification.
 Following JEDEC specifications.

3. DRAM Parameters by device density

RTT_Nom Setting	Parameter	4Gb	Units
tRFC	REF command ACT or REF command time	260	ns
tREFI	Average periodic refresh interval	-40°C ≤ TCASE ≤ 85°C	7.8 μs
		85°C < TCASE ≤ 95°C	3.9 μs

4. Ordering Information

DDR3L W/T SODIMM						
Part Number	Density	Speed	DIMM Organization	Number of DRAM	Number of rank	ECC
M3S0-8GMSDDPC	8GB	PC3-12800	1Gx64	16	2	N

5. Pin Configurations (Front side/Back side)

X64 SODIMM

Front						Back					
Pin	Name	Pin	Name	Pin	Name	Pin	Name	Pin	Name	Pin	Name
1	VREFDQ	69	DQ27	137	DQS4	2	VSS	70	DQ31	138	VSS
3	VSS	71	VSS	139	VSS	4	DQ4	72	VSS	140	DQ38
5	DQ0	73	CKE0	141	DQ34	6	DQ5	74	CKE1	142	DQ39
7	DQ1	75	VDD	143	DQ35	8	VSS	76	VDD	144	VSS
9	VSS	77	NC	145	VSS	10	/DQS0	78	A15*	146	DQ44
11	DM0	79	BA2	147	DQ40	12	DQS0	80	A14*	148	DQ45
13	VSS	81	VDD	149	DQ41	14	VSS	82	VDD	150	VSS
15	DQ2	83	A12, /BC	151	VSS	16	DQ6	84	A11	152	/DQS5
17	DQ3	85	A9	153	DM5	18	DQ7	86	A7	154	DQS5
19	VSS	87	VDD	155	VSS	20	VSS	88	VDD	156	VSS
21	DQ8	89	A8	157	DQ42	22	DQ12	90	A6	158	DQ46
23	DQ9	91	A5	159	DQ43	24	DQ13	92	A4	160	DQ47
25	VSS	93	VDD	161	VSS	26	VSS	94	VDD	162	VSS
27	/DQS1	95	A3	163	DQ48	28	DM1	96	A2	164	DQ52
29	DQS1	97	A1	165	DQ49	30	/RESET	98	A0	166	DQ53
31	VSS	99	VDD	167	VSS	32	VSS	100	VDD	168	VSS
33	DQ10	101	CK0	169	/DQS6	34	DQ14	102	CK1	170	DM6
35	DQ11	103	/CK0	171	DQS6	36	DQ15	104	/CK1	172	VSS
37	VSS	105	VDD	173	VSS	38	VSS	106	VDD	174	DQ54
39	DQ16	107	A10, /AP	175	DQS0	40	DQ20	108	BA1	176	DQ55
41	DQ17	109	BA0	177	DQ51	42	DQ21	110	/RAS	178	VSS
43	VSS	111	VDD	179	VSS	44	VSS	112	VDD	180	DQ60
45	/DQS2	113	/WE	181	DQ56	46	DM2	114	/S0	182	DQ61
47	DQS2	115	/CAS	183	DQ57	48	VSS	116	ODT0	184	VSS
49	VSS	117	VDD	185	VSS	50	DQ22	118	VDD	186	/DQS7
51	DQ18	119	A13*	187	DM7	52	DQ23	120	ODT1	188	DQ57
53	DQ19	121	/S1	189	VSS	54	VSS	122	NC	190	VSS
55	VSS	123	VDD	191	DQ58	56	DQ28	124	VDD	192	DQ62
57	DQ24	125	NC	193	DQ59	58	DQ29	126	VREFCA	194	DQ63
59	DQ25	127	VSS	195	VSS	60	VSS	128	VSS	196	VSS
61	VSS	129	DQ32	197	SA0	62	/DQS3	130	DQ36	198	/EVENT, NF
63	DM3	131	DQ33	199	VDDSPD	64	DQS3	132	DQ37	200	SDA
65	VSS	133	VSS	201	SA1	66	VSS	134	VSS	202	SCL
67	DQ26	135	/DQS4	203	VTT	68	DQ30	136	DM4	204	VTT


* This address might be connected to NC balls of the DRAMs (depending on density); either way they will be connected to the termination resistor.

6. Architecture

Pin Definition

Pin Name	Description	Number	Pin Name	Description	Number
CK[1:0]	Clock Inputs, positive line	2	DQ[63:0]	Data Input/Output	64
/CK[1:0]	Clock inputs, negative line	2	DM[7:0]	Data Masks	8
CKE[1:0]	Clock Enables	2	DQS[7:0]	Data strobes	8
/RAS	Row Address Strobe	1	/DQS[7:0]	Data strobes complement	8
/CAS	Column Address Strobe	1	/RESET	Reset Pin	1
/WE	Write Enable	1	TEST	Logic Analyzer specific test pin (No connect on SO-DIMM)	1
/S[1:0]	Chip Selects	2	/EVENT	Temperature event pin	1
A[9:0],A11,A[15:13]	Address Inputs	14	V _{DD}	Core and I/O Power	18
A10,AP	Address Input/Autoprecharge	1	V _{SS}	Ground	52
A12,BC	Address Input/Burst chop	1			
BA[2:0]	SDRAM Bank Address	3	V _{REFDQ} , V _{REFCA}	Input/Output Reference	2
ODT[1:0]	On-die termination control	2	V _{DDSPD}	SPD and Temp sensor Power	1
SCL	Serial Presence Detect (SPD) and Thermal sensor(TS) Clock Input	1	V _{tt}	Termination voltage	2
SDA	SPD and TS Data Input/Output	1	NC	Reserved for future use	2
SA[1:0]	SPD and TS address	2			
Total:					204

7. Function Block Diagram:
 - (8GB, 2 Ranks, 512Mx8 DDR3L SDRAMs)

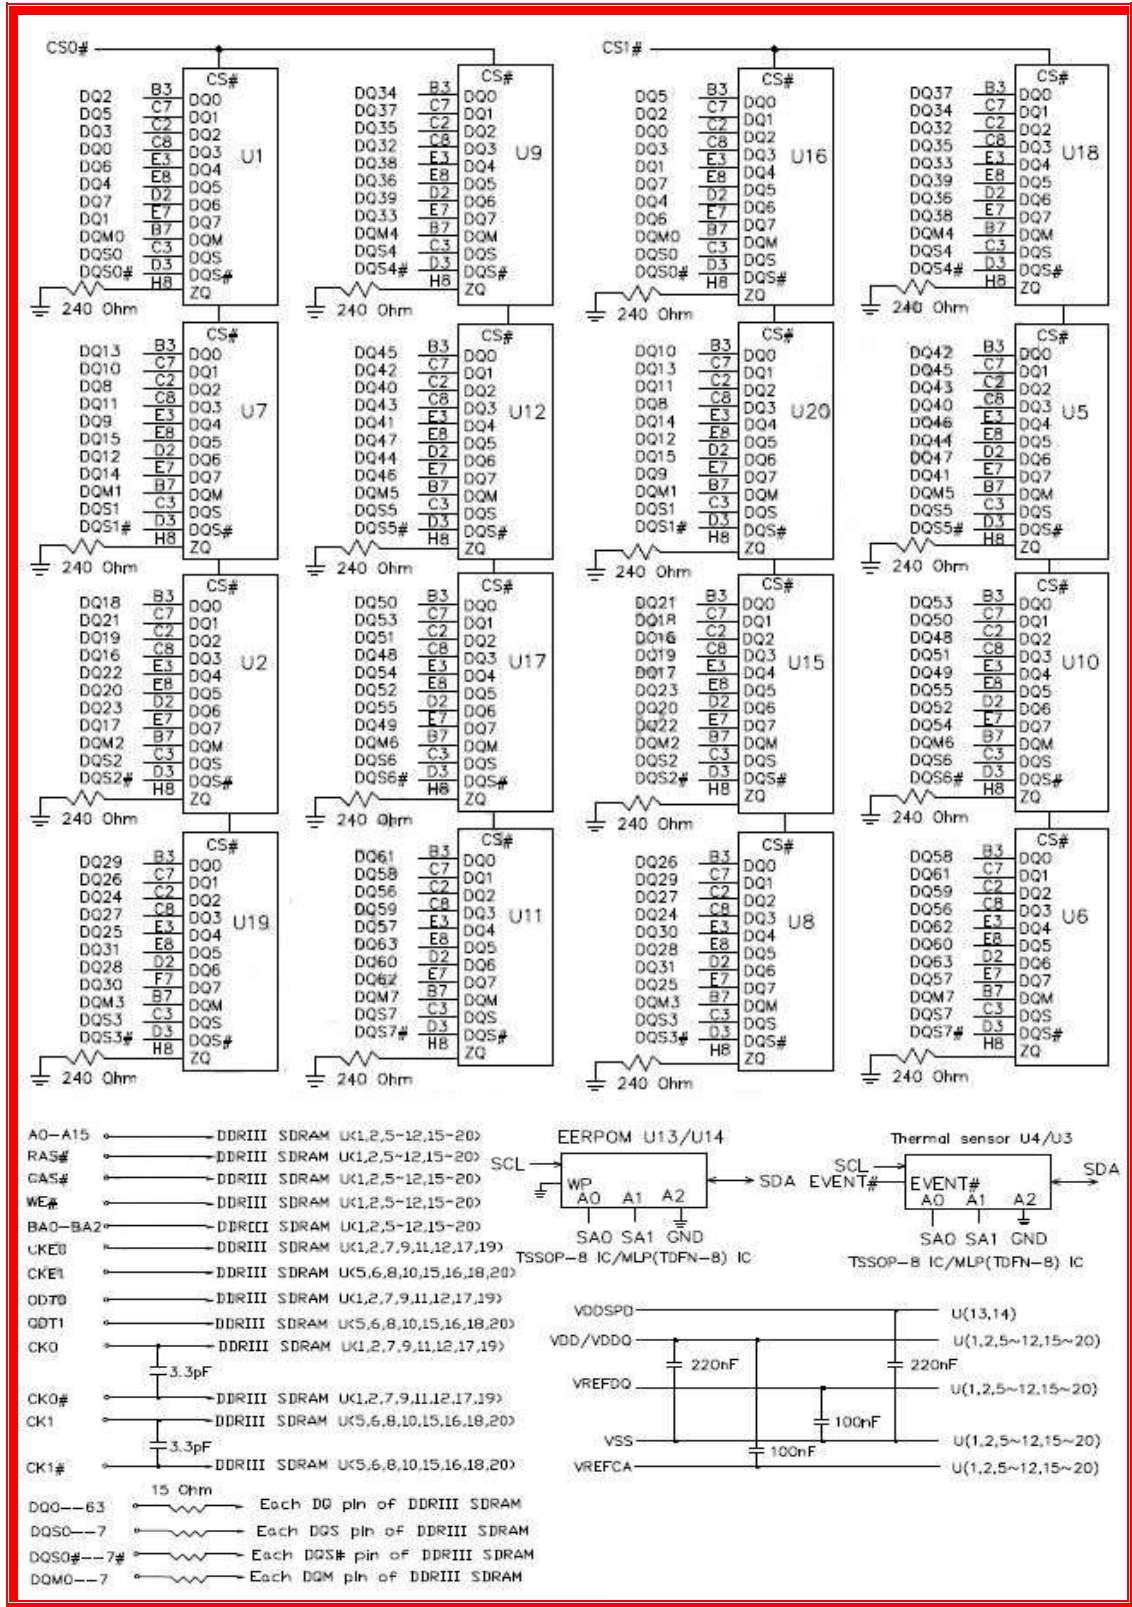

8. SDRAM Absolute Maximum Ratings

Symbol	Parameter	Rating	Units	Note	
T _{OPER}	Operation Temperature	Normal Operating Temp.	-40 to 85	°C	1,2
		Extended Temp.(optional)	85 to 95	°C	1,3
V _{IN} , V _{OUT}	Voltage on any pins relative to V _{ss}	-0.4 to +1.975	V	4	
V _{DD}	Voltage on VDD supply relative to V _{ss}	-0.4 to +1.975	V	4,6	
V _{DDQ}	Voltage on VDDQ supply relative to V _{ss}	-0.4 to +1.975	V	4,6	

Note:

1. Operating Temperature T_{OPER} is the case surface temperature on the center / top side of the DRAM.

For measurement conditions, please refer to the JEDEC document JESD51-2.

2. The Normal Temperature Range specifies the temperatures where all DRAM specifications will be supported. During operation, the DRAM case temperature must be maintained between 0 to 85 °C under all operating conditions.

3. Some applications require operation of the DRAM in the Extended Temperature Range between 85 °C and 95 °C case temperature. Full specifications are supported in this range, but the following additional conditions apply:

- a) Refresh commands must be doubled in frequency, therefore reducing the Refresh interval tREFI to 3.9 μs. It is also possible to specify a component with 1X refresh (tREFI to 7.8μs) in the Extended Temperature Range. Please refer to supplier data sheet and/or the DIMM SPD for option availability.
- b) If Self-Refresh operation is required in the Extended Temperature Range, then it is mandatory to either use the Manual Self-Refresh mode with Extended Temperature Range capability (MR2 A6 =0b and MR2 A7 = 1b) or enable the optional Auto Self-Refresh mode (MR2 A6 = 1b and MR2 A7 =0b). Please refer to the supplier data sheet and/or the DIMM SPD for Auto Self-Refresh option availability, Extended Temperature Range support and tREFI requirements in the Extended Temperature Range.

4. Stresses greater than those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is stress rating only, and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

5. Storage Temperature is the case surface temperature on the center/top side of the DRAM. For the measurement conditions, please refer to JESD51-2 standard.

6. V_{DD} and V_{DDQ} must be within 300 mV of each other at all times;and VREF must be not greater than 0.6 x V_{DDQ}, When V_{DD} and V_{DDQ} are less than 500 mV; VREF may be equal to or less than 300 mV

9. DRAM AC & DC Operating

Symbol	Parameter	Min	Typ.	Max	Units	Notes
Recommended DC Operating Conditions						
Recommended DC Operating Conditions - DDR3L (1.35V) operation						
V _{DD}	Supply Voltage	1.283	1.35	1.45	V	1,2
V _{DDSPD}	Supply Voltage	3	3.3	3.6	V	
V _{DDQ}	Supply Voltage	1.283	1.35	1.45	V	1,2
Recommended DC Operating Conditions - DDR3 (1.5V) operation						
V _{DD}	Supply Voltage	1.425	1.5	1.575	V	1,2
V _{DDSPD}	Supply Voltage	3	3.3	3.6	V	
V _{DDQ}	Supply Voltage	1.425	1.5	1.575	V	1,2
Single Ended AC/DC Input Levels						
V _{IH} (DC) DDR3L	DC Input High (Logic1) Voltage	V _{REF} + 90	-	V _{DD}	V	3
V _{IH} (DC) DDR3	DC Input High (Logic1) Voltage	V _{REF} + 100		V _{DD}	V	3
V _{IL} (DC) DDR3L	DC Input Low (Logic 0) Voltage	V _{SS}	-	V _{REF} - 90	V	3
V _{IL} (DC) DDR3	DC Input Low (Logic 0) Voltage	V _{SS}		V _{REF} - 100	V	3
V _{IH} (AC) DDR3L	AC Input High (Logic1) Voltage	V _{REF} + 135	-	-	V	3
V _{IH} (AC) DDR3	AC Input High (Logic1) Voltage	V _{REF} + 150			V	3
V _{IL} (AC) DDR3L	AC Input Low (Logic 0) Voltage	-	-	V _{REF} - 135	V	3
V _{IL} (AC) DDR3	AC Input Low (Logic 0) Voltage			V _{REF} - 150	V	3
V _{REFDQ} (DC)	Reference Voltage for DQ, DM inputs	0.49V _{DDQ}	0.5V _{DDQ}	0.51V _{DDQ}	V	4,5
V _{REFCA} (DC)	Reference Voltage for ADD,CMD inputs	0.49V _{DDQ}	0.5V _{DDQ}	0.51V _{DDQ}	V	4,5
Single Ended AC/DC Output Levels						
V _{OH} (DC)	DC output high measurement level (for IV curve linearity)	-	0.8 x V _{DDQ}	-	V	
V _{OM} (DC)	DC output mid measurement level (for IV curve linearity)	-	0.5 x V _{DDQ}	-	V	
V _{OL} (DC)	DC output low measurement level (for IV curve linearity)	-	0.2 x V _{DDQ}	-	V	

VOH (AC)	AC output high measurement level (for output SR)	-	$V_{TT} + 0.1 \times V_{DDQ}$	-	V	6
VOL (AC)	AC output low measurement level (for output SR)	-	$V_{TT} - 0.1 \times V_{DDQ}$	-	V	6

Symbol	Parameter	Min	Typ.	Max	Units	Notes
Differential AC/DC Input Levels						
VIHdiff DDR3L	Differential Input high	+0.18	-	Note 9	V	7
VIHdiff DDR3	Differential Input high	+0.2	-	Note 9	V	7
VILdiff DDR3L	Differential Input logic Low	Note 9	-	-0.18	V	7
VILdiff DDR3	Differential Input logic Low	Note 9	-	-0.2	V	7
VIHdiff(ac) DDR3L	Differential Input high ac	$2^* (V_{IH} (AC) - V_{REF})$	-	Note 9	V	8
VIHdiff(ac) DDR3	Differential Input high ac	$2^* (V_{IH} (AC) - V_{REF})$	-	Note 9	V	8
VILdiff(ac) DDR3L	Differential Input logic Low ac	Note 9	-	$2^* (V_{REF} - V_{IL} (AC))$	V	8
VILdiff(ac) DDR3	Differential Input logic Low ac	Note 9	-	$2^* (V_{REF} - V_{IL} (AC))$	V	8
Differential AC and DC Output Levels						
VOHdiff(AC)	AC differential output high measurement level (for output SR)	-	$+ 0.2 \times V_{DDQ}$	-	V	10
VOLdiff(AC)	AC differential output low measurement level (for output SR)	-	$- 0.2 \times V_{DDQ}$	-	V	10

Note:

1. Under all conditions VDDQ must be less than or equal to VDD.
2. VDDQ tracks with VDD. AC parameters are measured with VDD and VDDQ tied together.
3. For DQ and DM, Vref = VrefDQ. For input only pins except RESET#, Vref = VrefCA.
4. Recommended DC Operating Conditions - DDR3 (1.5V) operation : The ac peak noise on VRef may not allow VRef to deviate from VRef(DC) by more than +/-1% VDD (for reference: approx. +/- 15 mV); Recommended DC Operating Conditions - DDR3L (1.35V) operation: The ac peak noise on VRef may not allow VRef to deviate from VRef(DC) by more than +/-1% VDD (for reference: approx. +/- 13.5 mV)
5. For reference: approx. VDD/2.
6. The swing of $\pm 0.1 \times VDDQ$ is based on approximately 50% of the static single-ended output high or low swing with a driver impedance of 40Ω and an effective test load of 25Ω to $V_{TT} = VDDQ/2$
7. Used to define a differential signal slew-rate.
8. For CK - CK# use VIH/VIL(ac) of ADD/CMD and VREFCA; for DQS - DQS#, DQSL, DQSL#, DQSU, DQSU# use VIH/VIL(ac) of DQs and VREFDQ; if a reduced ac-high or ac-low level is used for a signal group, then the reduced level applies also here.
9. These values are not defined, however the single-ended signals CK, CK#, DQS, DQS#, DQSL, DQSL#, DQSU, DQSU# need to be within the respective limits (VIH(dc) max, VIL(dc)min) for single-ended signals as well as the limitations for overshoot and undershoot.
10. The swing of $\pm 0.2 \times VDDQ$ is based on approximately 50% of the static single-ended output high or low swing with a driver impedance of 40Ω and an effective test load of 25Ω to $V_{TT} = VDDQ/2$ at each of the differential outputs.

10. Operating, Standby, and Refresh Currents

- 8GB SODIMM (2 Ranks, 512Mx8 DDR3L SDRAMs)

Symbol	Parameter/Condition	PC3-12800	Unit
I DD0	One bank; Active - Precharge	448	mA
I DD1	One bank; Active - Read - Precharge	688	mA
I DD2N	Precharge Standby Current	256	mA
I DD2NT	Precharge Standby ODT Current	320	mA
I DD2P	Precharge Power Down Current Fast Mode	176	mA
	Precharge Power Down Current Slow Mode	160	mA
I DD2Q	Precharge Quiet Standby Current	240	mA
I DD3N	Active Standby Current	320	mA
I DD3P	Active Power-Down Current	240	mA
I DD4R	Operating Current Burst Read	1440	mA
I DD4W	Operating Current Burst Write	1440	mA
I DD5B	Burst Refresh Current	2432	mA
I DD6	Self-Refresh Current: Normal Temperature Range	240	mA
I DD7	Operating Bank Interleave Read Current	2080	mA
I DD8	Reset current	IDD2P + 2mA	mA

11. Timing Parameters

Symbol	Parameter	PC3-12800		Unit
		Min.	Max.	
Clock Timing				
tCK (DLL-Off)	Minimum Clock Cycle Time	8	-	ns
tCK (avg)	Average Clock Period	1.25	<1.5	ns
tCH (avg)	Average high pulse width	0.47	0.53	tCK (avg)
tCL (avg)	Average low pulse width	0.47	0.53	tCK (avg)
tCK (abs)	Absolute Clock Period	tCK(avg) min + tJIT(per) min	tCK(avg) max + tJIT(per) max -	Ps
tCH (abs)	Absolute high pulse width	0.43	-	tCK (avg)
tCL (abs)	Absolute low pulse width	0.43	-	tCK (avg)
JIT (per)	Clock Period Jitter	-70	70	Ps
TJIT (per, lck)	Clock Period Jitter during DLL locking period.	-60	60	Ps
JIT (CC)	Cycle to Cycle Period Jitter	140		Ps
TJIT (CC, lck)	Cycle to Cycle Period Jitter during DLL locking period.	120		Ps
TERR (2per)	Cumulative error across 2 cycle	-103	103	Ps
TERR (3per)	Cumulative error across 3 cycle	-122	122	Ps
TERR (4per)	Cumulative error across 4 cycle	-136	136	Ps
TERR (5per)	Cumulative error across 5 cycle	-147	147	Ps
TERR (6per)	Cumulative error across 6 cycle	-155	155	Ps
TERR (7per)	Cumulative error across 7 cycle	-163	163	Ps
TERR (8per)	Cumulative error across 3 cycle	-169	169	Ps
TERR (9per)	Cumulative error across 4 cycle	-175	175	Ps
TERR (10per)	Cumulative error across 5 cycle	-180	180	Ps
TERR (11per)	Cumulative error across 6 cycle	-184	184	Ps
TERR (12per)	Cumulative error across 7 cycle	-188	188	Ps

TERR (nper)	Cumulative error across 13~50 cycle	$tERR(nper)_{min} = (1 + 0.68 \ln(n)) * tJIT(per)_{min}$ $tERR(nper)_{max} = (1 + 0.68 \ln(n)) * tJIT(per)_{max}$		Ps
Data Timing				
Symbol	Parameter	Min.	Max.	Unit
tDQSQ	DQS, DQS# to DQ skew, per group, per access	-	100	Ps
tQH	DQ output hold time from DQS, DQS#	0.38	-	tCK(avg)
tLZ (DQ)	DQ low-impedance time from CK, CK#	-450	225	Ps
tHZ(DQ)	DQ high impedance time from CK, CK#	-	225	Ps
1.35V				
tDS(base) AC160	Data setup time to DQS, DQS# referenced to Vih(ac) / Vil(ac) levels	-	-	Ps
tDS(base) AC135		25	-	Ps
tDS(base) AC125		-	-	Ps
tDH(base) DC90	Data hold time from DQS, DQS# referenced to VIH(DC)VIL(DC) levels	55	-	Ps
1.5V				
tDS(base) AC175	Data setup time to DQS, DQS# referenced to Vih(ac) / Vil(ac) levels	-	-	Ps
tDS(base) AC150		10	-	Ps
tDS(base) AC135		-	-	Ps
tDH(base) DC100	Data hold time from DQS, DQS# referenced to VIH(DC)VIL(DC) levels	45	-	Ps
Data Strobe Timing				
Symbol	Parameter	Min.	Max.	Unit
tRPRE	DQS,DQS# differential READ Preamble	0.9		tCK(avg)
tRPST	DQS, DQS# differential READ Postamble	0.3		tCK(avg)

tQSH	DQS, DQS# differential output high time	0.4		tCK(avg)
tQSL	DQS, DQS# differential output low time	0.4		tCK(avg)
tWPRE	DQS, DQS# differential WRITE Preamble	0.9		tCK(avg)
tWPST	DQS, DQS# differential WRITE Postamble	0.3		tCK(avg)
tDQSCK	DQS, DQS# rising edge output access time from rising CK, CK#	-225	225	Ps
tLZ(DQS)	DQS and DQS# low-impedance time (Referenced from RL - 1)	-450	225	Ps
tHZ(DQS)	DQS and DQS# high-impedance time (Referenced from RL + BL/2)	-	225	Ps
tDQSL	DQS, DQS# differential input low pulse width	0.45	0.55	tCK(avg)
tDQSH	DQS, DQS# differential input high pulse width	0.45	0.55	tCK(avg)
tDQSS	DQS, DQS# rising edge to CK, CK# rising edge	-0.27	0.27	tCK(avg)
tDSS	DQS, DQS# falling edge setup time to CK, CK# rising edge	0.18	-	tCK(avg)
tDSH	DQS, DQS# falling edge hold time from CK, CK# rising edge	0.18	-	tCK(avg)
Command and Address Timing				
Symbol	Parameter	Min.	Max.	Unit
tDLLK	DLL locking time	512	-	nCK
tRTP	Internal READ Command to PRECHARGE Command delay	max(4nCK, 7.5ns)	-	
tWTR	Delay from start of internal write transaction to Internal read command	max(4nCK, 7.5ns)	-	
tWR	WRITE recovery time	15	-	ns
tMRD	Mode Register Set command cycle time	4	-	nCK
tMOD	Mode Register Set command update delay	max(12nCK, 15ns)	-	
tRCD	Refer to Section 1 Feature			
tRP	Refer to Section 1 Feature			
tRC	Refer to Section 1 Feature			
tCCD		4	-	nCK

tDAL (min)	Auto precharge write recovery + precharge time	WR + roundup(t_{RP} / $t_{CK}(avg)$)		nCK
tMPRR	Multi-Purpose Register Recovery Time	1	-	nCK
tRAS	ACTIVE to PRECHARGE command period	35	9 *tREFI	ns
tRRD	ACTIVE to ACTIVE command period for 1KB page size	max(4nC K, 6ns)	-	
tRRD	ACTIVE to ACTIVE command period for 2KB page size	max(4nC K, 7.5ns)	-	
tFAW	Four activate window for 1KB page size	30	-	ns
tFAW	Four activate window for 2KB page size	40	-	ns
1.35V				
tIS(base) AC160	Command and Address setup time to CK, CK# referenced to VIH(AC) / VIL(AC) levels	60	-	Ps
tIS(base) AC135		185	-	Ps
tIS(base) AC125		-	-	Ps
tIH(base) DC90	Command and Address hold time from CK, CK# referenced to VIH(DC) / VIL(DC) levels	130	-	Ps
1.5V				
tIS(base) AC175	Command and Address setup time to CK, CK# referenced to VIH(AC) / VIL(AC) levels	45	-	Ps
tIS(base) AC150		170	-	Ps
tIS(base) AC135		-	-	Ps
tIS(base) AC125		-	-	Ps
tIH(base) DC100	Command and Address hold time from CK, CK# referenced to VIH(DC) / VIL(DC) levels	120	-	Ps
Calibration Timing				
Symbol	Parameter	Min.	Max.	Unit
tZQinit	Power-up and RESET calibration time	512	-	nCK


tZQoper	Normal operation Full calibration time	256	-	nCK
tZQCS	Normal operation Short calibration time	64	-	nCK
Reset Timing				
Symbol	Parameter	Min.	Max.	Unit
tXPR	Exit Reset from CKE HIGH to a valid command	max(5nCK, tRFC + 10ns)	-	
Self Refresh Timings				
Symbol	Parameter	Min.	Max.	Unit
tXS	Exit Self Refresh to commands not requiring a locked DLL	Max(5nCK), tRFC + 10ns)		
tXSDLL	Exit Self Refresh to commands requiring a locked DLL.	tDLL(min)	-	nCK
tCKESR	Minimum CKE low width for Self Refresh entry to exit timing.	tCKE(min) + 1tCK	-	
tCKSRE	Valid Clock Requirement after Self Refresh Entry (SRE) or Power-Down Entry (PDE)	Max(5nCK, 10ns)	-	
tCKSRX	Valid Clock Requirement before Self Refresh Exit (SRX) or Power-Down Exit (PDX) or Reset Exit	Max(5nCK, 10ns)	-	
Power Down Timings				
Symbol	Parameter	Min.	Max.	Unit
tXP	Exit Power Down with DLL on to any valid command; Exit Precharge Power Down with DLL frozen to commands not requiring a locked DLL	max(3nCK, 6ns)	-	
tXPDLL	Exit Precharge Power Down with DLL frozen to commands requiring a locked DLL	max(10nCK, 24ns)	-	
tCKE	CKE minimum pulse width	max(3nCK, 5ns)	-	
tCPDED	Command pass disable delay	1	-	nCK

tPD	Power Down Entry to Exit Timing	tCKE(min)	9*tREFI	
tACTPDEN	Timing of ACT command to Power Down entry	1	-	nCK
tPRPDEN	Timing of PRE or PREA command to Power Down entry	1	-	nCK
tRDPDEN	Timing of RD/RDA command to Power Down entry	RL+4+1	-	nCK
tWRPDEN	Timing of WR command to Power Down entry (BL8OTF, BL8MRS, BC4OTF)	WL + 4 + (tWR / tCK(avg))	-	nCK
tWRAPDEN	Timing of WRA command to Power Down entry (BL8OTF, BL8MRS, BC4OTF)	WL + 4 + WR + 1	-	nCK
tWRPDEN	Timing of WR command to Power Down entry (BC4MRS)	WL + 2 + (tWR / tCK(avg))	-	nCK
tWRAPDEN	Timing of WRA command to Power Down entry (BC4MRS)	WL + 2 + WR + 1	-	nCK
tREFPDEN	Timing of REF command to Power Down entry	1	-	nCK
tMRSPDEN	Timing of MRS command to Power Down entry	tMOD(min)	-	nCK
ODT Timings				
Symbol	Parameter	Min.	Max.	Unit
ODTH4	ODT high time without write command or with write command and BC4	4	-	nCK
ODTH8	ODT high time with Write command and BL8	6	-	nCK
tAONPD	Asynchronous RTT turn-on delay (Power-Down with DLL frozen)	2	8.5	ns
tAOFPD	Asynchronous RTT turn-off delay (Power-Down with DLL frozen)	2	8.5	ns
tAON	RTT-turn-on	-225	225	ps
tAOF	RTT_Nom and RTT_WR turn-off time from ODTLoff reference	0.3	0.7	tCK(avg)

tADC	RTT dynamic change skew	0.3	0.7	tCK(avg)
Write Leveling Timing				
Symbol	Parameter	Min.	Max.	Unit
tWLMRD	First DQS/DQS# rising edge after write leveling mode is programmed	40	-	nCK
tWLDQSEN	DQS/DQS# delay after write leveling mode is programmed	25	-	nCK
tWLS	Write leveling setup time from rising CK, CK# crossing to rising DQS, DQS# crossing	165	-	ps
tWLH	Write leveling hold time from rising DQS, DQS# crossing to rising CK, CK# crossing	165	-	ps
tWLO	Write leveling output delay	0	7.5	ns
tWLOE	Write leveling output error	0	2	ns

12. PACKAGE DIMENSION

- (8GB, 2 Ranks, 512Mx8 DDR3L base SODIMM)

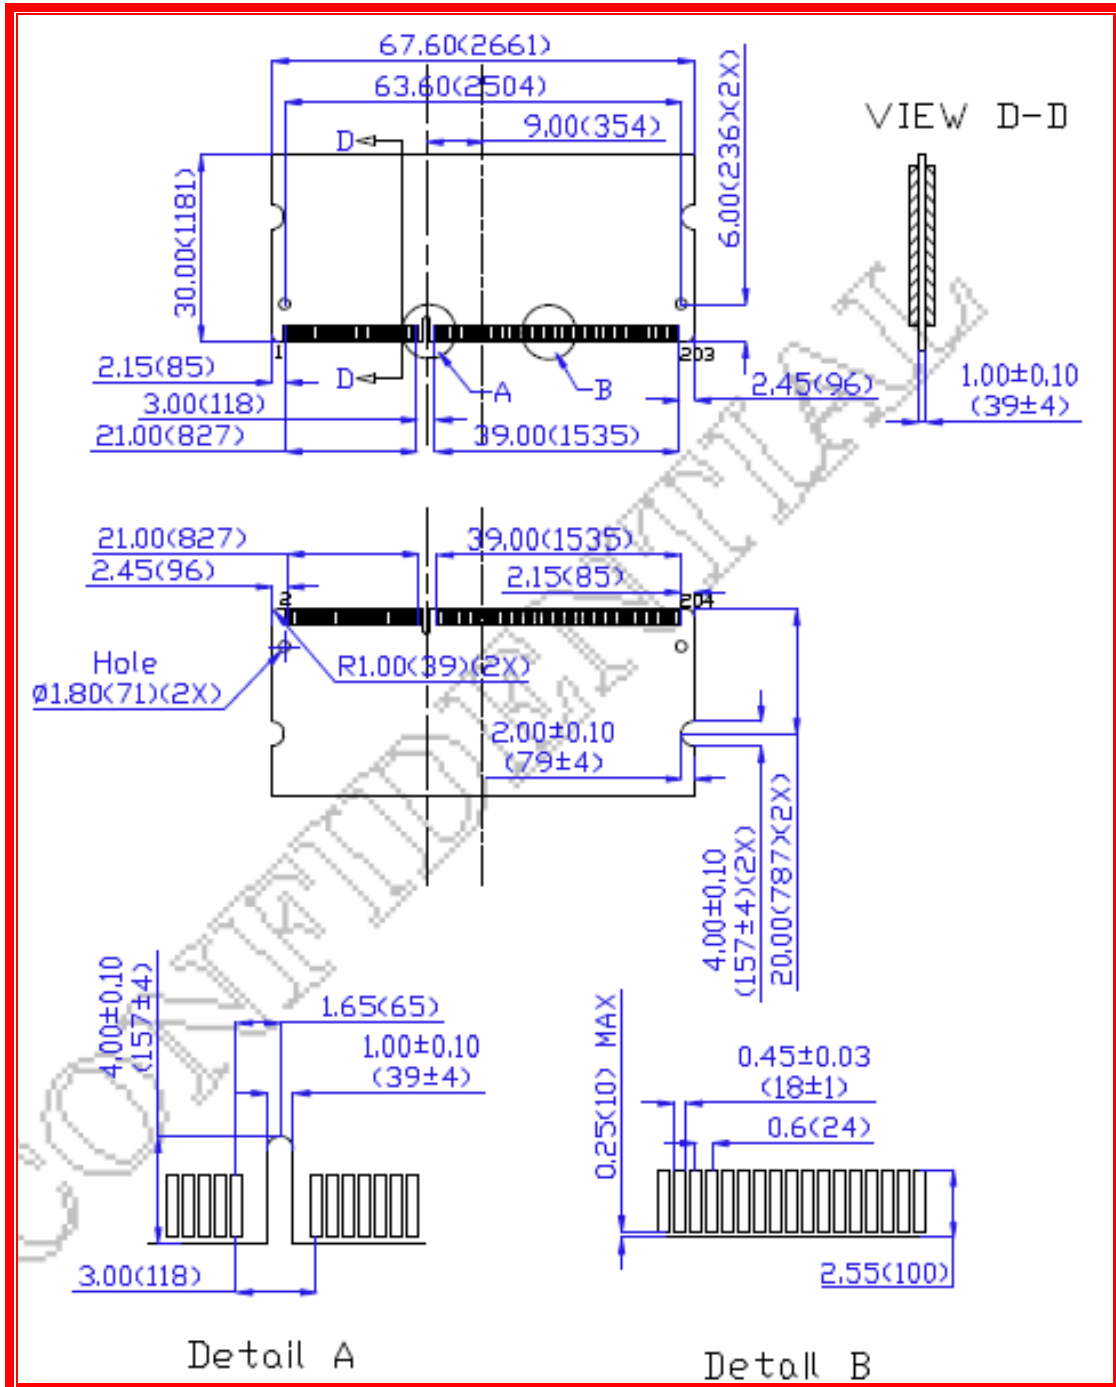

Note: All dimensions are in millimeters (mils) and should be kept within a tolerance of ±0.15 (6), unless otherwise specified.

13. RoHS Declaration

innodisk	宜鼎國際股份有限公司 Innodisk Corporation	Page 1/1																						
Tel:(02)7703-3000 Fax:(02) 7703-3555 Internet: http://www.innodisk.com/																								
RoHS 自我宣告書 (RoHS Declaration of Conformity)																								
Manufacturer Product: All Innodisk EM Flash and Dram products																								
<p>一、 宜鼎國際股份有限公司（以下稱本公司）特此保證售予貴公司之所有產品，皆符合歐盟 2011/65/EU 及 (EU) 2015/863 關於 RoHS 之規範要求。</p> <p>Innodisk Corporation declares that all products sold to the company, are complied with European Union RoHS Directive (2011/65/EU) and (EU) 2015/863 requirement.</p>																								
<p>二、 本公司同意因本保證書或與本保證書相關事宜有所爭議時，雙方宜友好協商，達成協議。</p> <p>Innodisk Corporation agrees that both parties shall settle any dispute arising from or in connection with this Declaration of Conformity by friendly negotiations.</p>																								
<table border="1"> <thead> <tr> <th>Name of hazardous substance</th> <th>Limited of RoHS ppm (mg/kg)</th> </tr> </thead> <tbody> <tr> <td>鉛 (Pb)</td> <td>< 1000 ppm</td> </tr> <tr> <td>汞 (Hg)</td> <td>< 1000 ppm</td> </tr> <tr> <td>鎘 (Cd)</td> <td>< 100 ppm</td> </tr> <tr> <td>六價鉻 (Cr 6+)</td> <td>< 1000 ppm</td> </tr> <tr> <td>多溴聯苯 (PBBs)</td> <td>< 1000 ppm</td> </tr> <tr> <td>多溴二苯醚 (PBDEs)</td> <td>< 1000 ppm</td> </tr> <tr> <td>鄰苯二甲酸二(2-乙基己基)酯 (DEHP)</td> <td>< 1000 ppm</td> </tr> <tr> <td>鄰苯二甲酸丁酯苯甲酯 (BBP)</td> <td>< 1000 ppm</td> </tr> <tr> <td>鄰苯二甲酸二丁酯 (DBP)</td> <td>< 1000 ppm</td> </tr> <tr> <td>鄰苯二甲酸二異丁酯 (DIBP)</td> <td>< 1000 ppm</td> </tr> </tbody> </table>			Name of hazardous substance	Limited of RoHS ppm (mg/kg)	鉛 (Pb)	< 1000 ppm	汞 (Hg)	< 1000 ppm	鎘 (Cd)	< 100 ppm	六價鉻 (Cr 6+)	< 1000 ppm	多溴聯苯 (PBBs)	< 1000 ppm	多溴二苯醚 (PBDEs)	< 1000 ppm	鄰苯二甲酸二(2-乙基己基)酯 (DEHP)	< 1000 ppm	鄰苯二甲酸丁酯苯甲酯 (BBP)	< 1000 ppm	鄰苯二甲酸二丁酯 (DBP)	< 1000 ppm	鄰苯二甲酸二異丁酯 (DIBP)	< 1000 ppm
Name of hazardous substance	Limited of RoHS ppm (mg/kg)																							
鉛 (Pb)	< 1000 ppm																							
汞 (Hg)	< 1000 ppm																							
鎘 (Cd)	< 100 ppm																							
六價鉻 (Cr 6+)	< 1000 ppm																							
多溴聯苯 (PBBs)	< 1000 ppm																							
多溴二苯醚 (PBDEs)	< 1000 ppm																							
鄰苯二甲酸二(2-乙基己基)酯 (DEHP)	< 1000 ppm																							
鄰苯二甲酸丁酯苯甲酯 (BBP)	< 1000 ppm																							
鄰苯二甲酸二丁酯 (DBP)	< 1000 ppm																							
鄰苯二甲酸二異丁酯 (DIBP)	< 1000 ppm																							
立 保 證 書 人 (Guarantor)																								
Company name 公司名稱： <u>Innodisk Corporation 宜鼎國際股份有限公司</u>																								
Company Representative 公司代表人： <u>Randy Chien 簡川勝</u>																								
Company Representative Title 公司代表人職稱： <u>Chairman 董事長</u>																								
Date 日期： <u>2017 / 01 / 18</u>																								
																								

Revision Log

Rev	Date	Modification
0.1	23 rd June 2014	Preliminary Edition
1.0	23 rd June 2014	Official released.
1.1	21 st February 2018	Updated RoHS and modified typos