



Features

VPC (Vina Pulse Capacitor)

- Low Self Discharge
- High Operating Voltage
- Wide Operating Temperature Range
- High Capacitance

Drawing

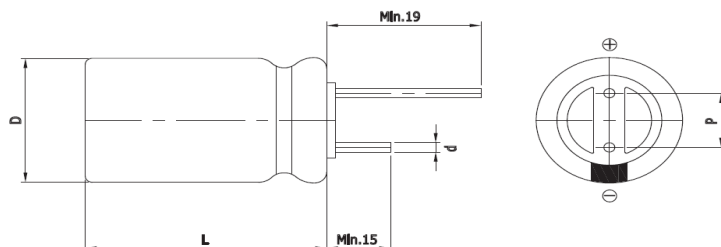

Size	1335
D (Φ)	12.5 +1.0 Max
L (mm)	35.0 ±1.5
d (Φ)	0.8 ±0.1
P (mm)	5.0 ±0.5

Specification

Item	Spec. value	Test methods					
Operating Voltage Range	2.5V to 3.8V (2.5V to 3.5V @ 85°C)						
Operating Temp. Range	-25 ~ 85°C (-40 ~ 85°C @ in Li/SOCL2 battery system)						
Capacitance Tolerance	0 ~ +30%						
Load Life @ 70°C, 3.8V	Capacitance : ≤ 30% of initial value ESR : Less than 200% of spec. Appearance : No abnormality	Temperature: 70±2°C, 85±2°C Time : 1,000 hours Voltage : 3.8V, 3.5V and measure the floating charge characteristics after returning to normal temperature and humidity.					
Load Life @ 85°C, 3.5V							
Temperature Cycle		Temperature: 85±2°C, -40±2°C Duration: 30 min / Numbers: 100 times					
Cycle Life		<table> <tr> <td>100% DOD</td><td>50% DOD</td><td>1% DOD</td></tr> <tr> <td>20,000Cycle</td><td>100,000Cycle</td><td>500,000Cycle</td></tr> </table>	100% DOD	50% DOD	1% DOD	20,000Cycle	100,000Cycle
100% DOD	50% DOD	1% DOD					
20,000Cycle	100,000Cycle	500,000Cycle					
Shelf life	Capacitance : ≤ 10% of initial value ESR : Less than 100% of spec.	Temperature : 25±2°C Cut-off Voltage : 2.5V Temp. : below 25°C, No Electrical Charge, Time : 3 years *VPC recommends charging at rated voltage every six months					

Part Number	Rated Voltage (V)	Rated Capacitance (F) #1	ESR _{DC} (mΩ)	ESR _{AC} (mΩ)	Leakage Current (μA)	Self Discharge (V) #1	Rated Current (A)	Pulse Current (A) #2	Weight (g)
VEL13353R8257G	3.8 Surge Voltage (4.0V)	250 @ 25°C	100 @ 25°C 100msec	50 @ 25°C 1kHz	5 @ 25°C 72hr	Over 97% @ 25°C	0.75 @ 25°C	5.0 @ 25°C	8.2±0.2

#1 Reference IEC62813 4.2

#2 1sec. Discharge to 3.2V

※ WARNING : precautions must be taken to ensure that device leads are not shorted