


Features

EDLC (Electric Double Layer Capacitor)

- High Power Density
- Over 500,000 cycle life (semi-permanent)
- Higher energy density compared with 2.7V caps
- RoHS compliant
- Long-term reliability improved at high temperature and humidity



Drawing

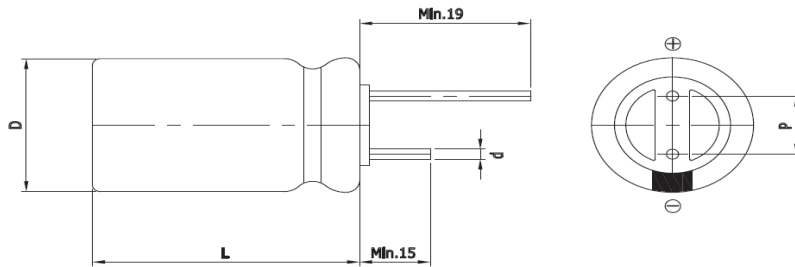

D (Φ)	18.0 +1.0 Max
L (mm)	59.0 ±1.5
d (Φ)	0.8 ±0.1
P (mm)	7.5 ±0.5

Specification

Item		Characteristics	
Product series		EDLC	
Rated Voltage (V _R)		3.0V	
Operating Temperature		-40 ~ +65℃	
Capacitance Tolerance		-10 ~ +30%	
High Temperature Load Life		After 1,000 hours at V _R loaded under +65℃, capacitors meet the following criteria.	
		Capacitance Change	≤ 30% of initial value
		ESR	≤ 2 times of specified value
Cycle Life Characteristics	Cycle	Over 500,000	
	ΔC	≤ 30% of initial value	
	ESR	≤ 2 times of specified value	
	Method	Cycle of Charge/discharge from V _R to 1/2V _R	
Shelf Life		3 Years No Electrical Charge, Temperature below 25℃ (ΔC : ≤ 10% of initial value / ΔESR : ≤ 50% of specified value)	

Part Number	Rated Voltage (V)	Capacitance (F)	ESR (mΩ)		Max. Current (A)	Leakage Current (mA, 72hr)		Size (mm) D x L
			AC(1kHz)	DC		@2.7V	@3.0V	
WEC 3R0 107 QD	3.0	100	12	20	50	0.200	0.300	18 x 59

* Max. Current : 1 sec. discharge to $1/2V_R$

Version 1.3 2021.02.01.