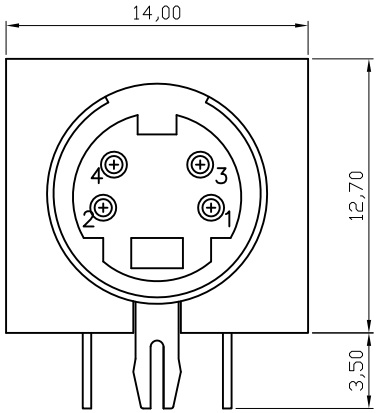

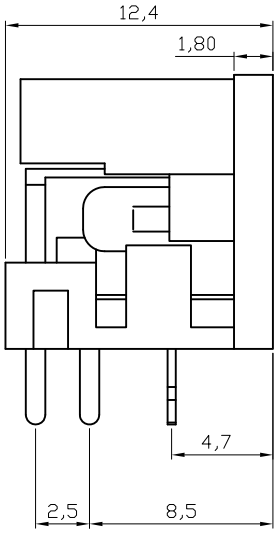

1.Material:
Contacts :Brass
Housing: PBT+30% G.F. UL 94V-0;Black

2.Electrical:
Current-max[amps] 0.3AMP DC30V
Withstanding Voltage 1000V AC MIN.
Contact Resistance [ohms] 30 milliohms max
Insulation Resistance [ohms] 100 Megohms min

3.Plating:
Contacts: Full gold flash

4.Environmental
Temperature Range -25°C~+85°C



Recommended PCB Layout
Top View Tolerance(±0,05)

RoHS compliant

Scale	1:1						Date	Name	Customer-No.
TOLERANCE						Drawn	02.08.2006	Hellwig	
X.X	±0.38					Approved	25.11.2010	Gerber	ASSMANN WSW-No. A-DIO-M04
X.XX	±0.25								
X.XXX	±0.15	③	Change the manufacture plant	25.11.2010	Alex				Drawing-No. ASS 0504 CO rev03
DIM	TOL	②	Update	15.07.2009	Rale				
X.°	±1°	①	Drawn	02.08.2006	Hellwig				
X.X°	±X°								Replace / Sheet
Angle	TOL	Id.	Modification	Date	Name				

ASSMANN WSW components