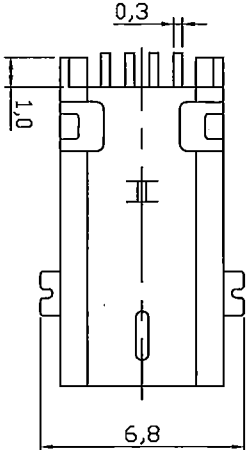
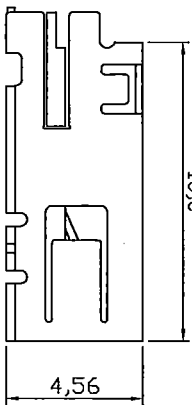
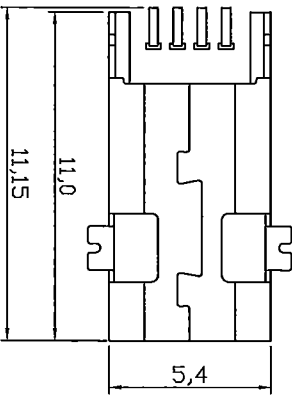

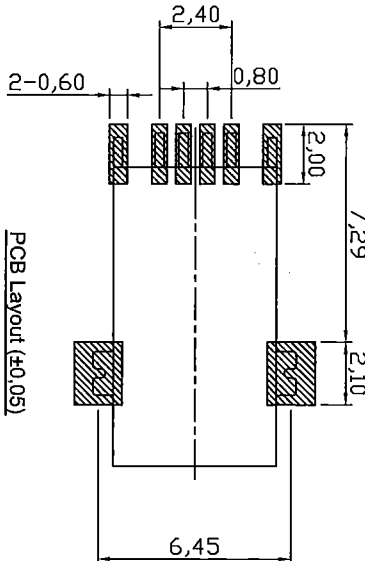


	1	2	3	4	5	6	7																																																																									
A	Specification: Housing: High temp. UL94V-0, black Shell: Brass, Nickel plated Contact: Phosphor bronze, 15u" gold selective over Nickel Current rating: 1 Amp Dielectric withstanding voltage: AC 500V Insulation resistance: 1000 M ohms Min. Contact resistance: 30m ohms Max. Mating force: 3.57 Kgf max. Unmating force: 0.7 Kgf Min. Packing: tape & reel (1000pcs/reel)							A																																																																								
B								B																																																																								
C								C																																																																								
D								D																																																																								
E								E																																																																								
F	 PCB Layout (±0.05)							F																																																																								
G	RoHS compliant							G																																																																								
H	1	2	3	4	5	6	7	H																																																																								
<table><tr><td>Scale</td><td>1:1</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>TOLERANCE</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>.X</td><td>±0.38</td><td></td><td></td><td></td><td>Drawn</td><td>07.07.2009</td><td>Dean</td></tr><tr><td>.XX</td><td>±0.25</td><td></td><td></td><td></td><td>Approved</td><td>20.04.2011</td><td>Heilwig</td></tr><tr><td>.XXX</td><td>±0.10</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>DIM</td><td>TOL</td><td>②</td><td>Change the manufacture plant</td><td>20.04.2011</td><td>Rale</td><td></td><td></td></tr><tr><td>X.°</td><td>±1°</td><td>①</td><td>Drawn</td><td>07.07.2009</td><td>Dean</td><td></td><td></td></tr><tr><td>Angle</td><td>TOL</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>UNIT</td><td>mm</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td></td><td></td></tr></table>								Scale	1:1							TOLERANCE								.X	±0.38				Drawn	07.07.2009	Dean	.XX	±0.25				Approved	20.04.2011	Heilwig	.XXX	±0.10							DIM	TOL	②	Change the manufacture plant	20.04.2011	Rale			X.°	±1°	①	Drawn	07.07.2009	Dean			Angle	TOL							UNIT	mm	Id.	Modification	Date	Name			
Scale	1:1																																																																															
TOLERANCE																																																																																
.X	±0.38				Drawn	07.07.2009	Dean																																																																									
.XX	±0.25				Approved	20.04.2011	Heilwig																																																																									
.XXX	±0.10																																																																															
DIM	TOL	②	Change the manufacture plant	20.04.2011	Rale																																																																											
X.°	±1°	①	Drawn	07.07.2009	Dean																																																																											
Angle	TOL																																																																															
UNIT	mm	Id.	Modification	Date	Name																																																																											
<table><tr><td colspan="4">ASSMANN WSW components</td><td colspan="4">Customer-No. ASSMANN WSW-No. A-USB B-M4-M-C</td></tr><tr><td colspan="4">Drawing-No. ASS 3558 CO</td><td colspan="4">rev02</td></tr><tr><td colspan="4">Replace</td><td colspan="4">Sheet</td></tr></table>								ASSMANN WSW components				Customer-No. ASSMANN WSW-No. A-USB B-M4-M-C				Drawing-No. ASS 3558 CO				rev02				Replace				Sheet																																																				
ASSMANN WSW components				Customer-No. ASSMANN WSW-No. A-USB B-M4-M-C																																																																												
Drawing-No. ASS 3558 CO				rev02																																																																												
Replace				Sheet																																																																												