

7" Rugged Tablet ARM-based Android™ with 1.5 GHz Dual Core Processor



Features

- 7" WXGA (1280 x 720) TFT LCD Display, 400 nits, 680 nits (Optional)
- TI® OMAP™ 4470 1.5 GHz Dual Core Processor
- DDR2 1GB SDRAM
- Projected Capacitive Multi-Touch Panel, Gorilla Glass
- Extended Battery Swappable, MIL-STD 810G, IP65 Compliant
- GPS/GLONASS Simultaneously
- WiFi a/b/g/n, BT3.0
- Support NFC/RFID, Ethernet + COM Port (Optional)
- 1D/2D Barcode Scanner with Trigger Button (Optional)
- MSR(Optional)/SCR (Optional)
- G-Sensor, Light Sensor, E-Compass
- Android 4.2




Specifications

System	
Processor	TI® OMAP™ 4470 1.5GHz Dual Core Processor
Chipset	—
System Memory	1GB LPDDRII
LCD Display	7" TFT-LCD (1280 x 800) / 16:10
Communication	Bluetooth v3.0, Wi-Fi (802.11 b/g/n), NFC/ RFID (13.56MHz), 3G (Optional),
I/O Port	DC-in jack x 1, MicroSD Card x 1, SIM card slot x 1, Mini HDMI port x 1, Mini USB x 1, Built-in Speaker & Microphone x 1, 3.5mm stereo headphone jack x 1, 1D/2D Barcode scanner x 1 (Optional), Magnetic Stripe Reader x 1 (Optional), COM port x 1+Ethernetx 1 (Optional)
Storage	16GB eMMC
Navigation	GPS, Glonass(Optional), AGPS* is enabled with 3G
Camera	Rear-facing: 5MP (8MP: optional)
Sensor	S-sensor, E-compass, Gyroscope, Light-sensor
OS	Android™ 4.2
Mechanical	
Color	Black
Dimension	5.38" x 8.58" x 0.83" (136.6mm x 219mm x 21mm)
Gross Weight	1.254 lb (0.57 kg)
Carton Dimension	—
Environmental	
Operating Temperature	-4°F ~ 122°F(-20°C ~ 50°C)
Storage Temperature	-67°F ~ 158°F (-55°C ~ 70°C)
Operating Humidity	50°C; 5% ~ 90%RH; 120 hours
Water & Dust Proof	IP65
Vibration	MIL-STD-810G Method 514.6 Procedure I, Cat. 24, Fig. 514.6E-1 & E-2
Drop	MIL-STD-810G Method 516.6 Procedure IV - Height of Drop: 122cm (48 inch; 4ft), - Number of Drop: 26 times, - Floor: Two-inch plywood backed by concrete, - For all surfaces, edges and corners
ESD	Air charge: +/- 8KV, Contact charge: +/- 4KV
EMC/ Safety	UL: UL60950-1, CE/LVD: EN60950-1, FCC, CE
Power Supply	
AC/ DC Adapter	AC Power: 100~240V, 24W, DC Power:12V/3A
Battery 1 pack	Li-polymer High Capacity Battery, up to 8 Hours Battery Life,
Battery 2 packs and one swappable	Li-polymer High Capacity Battery, up to 6 Houes Battery Life, one hard pack removable
LCD	
Display Type	7" TFT-LCD / 16:10
Max. Resolution	1280 x 800 pixel
Max. Color	16.7M
Dot Size	0.117(W) x 0.117(H)
Luminance	400 nits, 680 nits (optional)
View Angle	Horizontal: 178° (Typ.), Vertical: 178° (Typ.)

RTC-700M

Dimension

Unit: mm

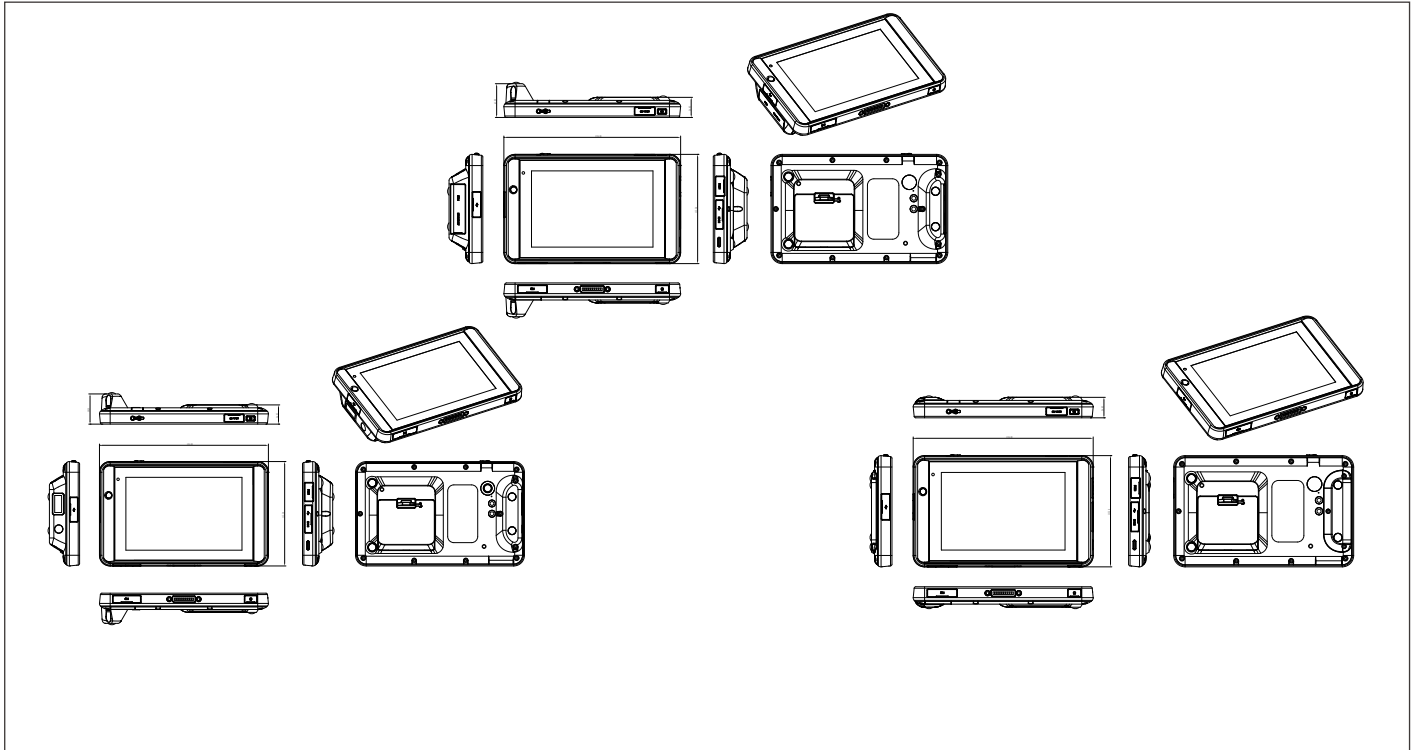

Touch Screen	
Type	Projected capacitive multi-touch screen (PCT)
Light Transmission	Min 87% (ASTM D1003; Wavelength = 550nm)

Packing List

- 1255300360 Power Adapter
- Product CD
- RTC-700M

Optional Accessories

- **AP-OT9789666663**
Vehicle Docking (Non-chargeable)
- **1700050156**
USB OTG Cable (Host to Device)
- **AP-PS1757402101**
Vehicle DC/DC Adapter
- **1702031830**
Power Cord Cable for USA
- **1700051000**
USB Cable (Client to PC)
- **9789700A02**
Desktop Stand
- **1702031831**
Power Cable for Europe
- **219700C001**
Carry Bag w/ Shoulder Belt
- **PER-A151**
USB, COM and RJ45 Module
- **PER-A139**
MSR Module
- **PER-A140**
MSR and SCR Module
- **TF-RDS-0310-0000**
Docking Station(with Stand)
- **TF-RDS-0310-0002**
Docking Station(without Stand)
- **9789700A01**
Portable Stand
- **9789700A03**
Portable Stand with Ring Hand Strap
- **9789600A00**
Battery
- **RDS-0040-0000**
4-Bay Battery Charger
- **9759700B00**
Hand Strap

* Small quantity MOQ may apply for optional/customized services.

Ordering Information

Part Number	CPU	LCD Display	Touch Screen	System Memory	Storage	OS	WiFi/ Bluetooth	3G Bands (MHz)	Navigation	Sensor	Camera	Battery	Expansion I/O	Size & Weight	Operation Temp	Durable	NFC (HF RFID)	2D Barcode Scanner	Com + Ethernet	Docking
RTC-700M-TAD-WBGHR-5101	TI® OMAP™ 4470 1.5GHz Dual Core Processor	7" TFT LCD	Pcap 10-point	LPDDR2 1GB	16GB eMMC Flash	Android 4.2	802.11 b/g/n + BT3.0+ EDR	850/1900/2100	GPS/ Glonass/ AGPS	Light Sensor x1, G Sensor x1, 3-axis digital groscope x1, Vibrator x1	Back: 5MP	Dual-Battery, Internal: 7.4V, 1530mAh, External: 7.4V, 1530mAh	MiniHDMI x 1, MiniUSB x1, micro SD x1, SIM Card x 1	L219.4 x W135.58 x H 39.2 mm, 640g	-20°C ~ 50°C	Meet IEC 60529 IP-65 standard, Mil Std 810G-516.6, Procedure IV, 26 drops of 48" height to 2" plywood over concrete with bumpers & uNits off, 2 units to pass	Yes	Yes	—	Yes
RTC-700M-TAD-WBGHR-5102		7" TFT LCD	Pcap 10-point	LPDDR2 1GB	16GB eMMC Flash	Android 4.2	802.11 b/g/n + BT3.0+ EDR	850/1900/2100	GPS/ Glonass/ AGPS		Back: 5MP	Dual-Battery, Internal: 7.4V, 1530mAh, External: 7.4V, 1530mAh	MiniHDMI x 1, MiniUSB x1, micro SD x1, SIM Card x 1	L219.4 x W135.58 x H 41.9 mm, 640g	-20°C ~ 50°C		Yes	—	Yes	Yes
RTC-700M-TAD-WBGHR-5100		7" TFT LCD	Pcap 10-point	LPDDR2 1GB	16GB eMMC Flash	Android 4.2	802.11 a/b/g/n + BT4.0+ EDR	850/1900/2100	GPS		Back: 5MP	Dual-Battery, Internal: 7.4V, 1530mAh, External: 7.4V, 1530mAh	MiniHDMI x 1, MiniUSB x1, micro SD x1, SIM Card x 1	L219.4 x W135.58 x H 21.2 mm, 655g	-20°C ~ 50°C		—	—	—	Yes
RTC-700M-TAD-WBG-5100		7" TFT LCD	Pcap 10-point	LPDDR2 1GB	16GB eMMC Flash	Android 4.2	802.11 a/b/g/n + BT4.0+ EDR	—	GPS		Back: 5MP	Dual-Battery, Internal: 7.4V, 1530mAh, External: 7.4V, 1530mAh	MiniHDMI x 1, MiniUSB x1, micro SD x1, SIM Card x 1	L219.4 x W135.58 x H 21.2 mm, 655g	-20°C ~ 50°C		—	—	—	Yes

Note: All specifications are subject to change without notice.