



CM7V-T1A 0.4

Tuning Fork Crystal 32.768 kHz




100% leadfree, RoHS - compliant


Lowest profile SMT ceramic pack.
Ultra low profile: 0.38 mm height
SMD-package in Tape and Reel
Ind. and Ext. temperature ranges
High stability
Low aging
Low power consumption
High shock and vibration resistance

DIMENSIONS

Package:

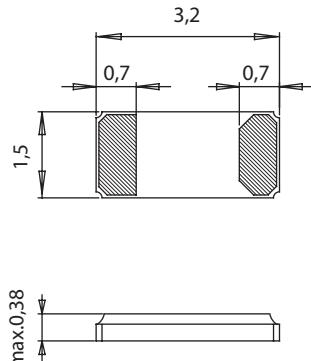

Recommended Solder Pad:

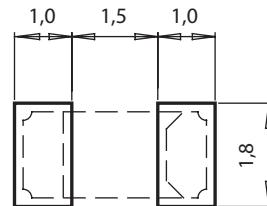

All dimensions in mm typical

DESCRIPTION:

This SMD ceramic package has been specially designed for ultra low profile telecom and smart-card applications. A special crystal manufacturing process is used to achieve improved electrical characteristics and a miniaturized blank size.

For pick-and-place equipment, the parts are available in 8 mm tape:

7" (178 mm) reel with 1'000 crystals

7" (178 mm) reel with 3'000 crystals

13" (330 mm) reel with 14'000 crystals

ELECTRICAL CHARACTERISTICS AT 25°C:

Nominal Frequency ¹⁾	F _L	32.768	kHz
Load capacitance ²⁾	C _L	7.0 / 9.0 / 12.5	pF
Frequency tolerance ³⁾	ΔF/F	+/-20	ppm
	ΔF/F	+/-100	ppm
Series resistance typ./max.	R _S	55 / 80	kΩ
Motional capacitance typ.	C ₁	3.5	fF
Static capacitance typ.	C ₀	1.4	pF
Drive level max.	P	0.5	μW
Insulation resistance min.	R _i	500	MΩ
Aging first year max.	ΔF/F	+/-3	ppm
Turnover temperature	T ₀	25 +/-5	°C
Frequency vs. temperature	ΔF/F ₀	-0.035 ppm/°C ² (T - T ₀) ² +/-10%	ppm

1) Other frequencies on request.

2) Other load capacitances on request.

3) Tighter and wider frequency tolerances on request.

STANDARD FREQUENCIES:

Frequency kHz
32.768
Other frequencies on request

**ENVIRONMENTAL
CHARACTERISTICS:**

		Conditions	Max. Dev.
Storage temperature range		-55 to +125°C	
TA Operating temperature range		-40 to +85°C	
Shock resistance	ΔF/F	5000 g, 0.3 ms, ½ sine	+/-5 ppm
Vibration resistance	ΔF/F	20 g / 10–2000 Hz	+/-5 ppm

**TERMINATIONS AND
PROCESSING:**

Type	Termination	Processing
CM7V-T1A 0.4	For SMD mounting Au plated pads	Reflow soldering 260°C / 20 s max.

**PRODUCT DESCRIPTION AND
ORDERING INFORMATION:**

CM7V-T1A 0.4		<u>32.768kHz</u>	<u>12.5pF</u>	<u>+/-20ppm</u>	<u>TA</u>	<u>QC</u>
<u>Frequency f₀</u>						
<u>C_L Load Capacitance</u>						
7.0 pF						
9.0 pF						
12.5 pF						
<u>Frequency tolerance</u>						
+/- 20 ppm						
+/- 100 ppm						
<u>Temperature Range</u>						
TA = -40 to 85°C (Standard)						
Optional: if not defined, 'Standard' will apply						
Qualification						
QC = Commercial (Standard)						
A unique part number will be generated for each product specification, i.e: 20xxxx-MC01 1'000 pcs (in 8mm tape on 7" reel) 20xxxx-MC03 3'000 pcs (in 8mm tape on 7" reel) 20xxxx-PC14 14'000 pcs (in 8mm tape on 13" reel) Please contact us.						

All specifications subject to change without notice.



Micro Crystal AG
Mühlestrasse 14
CH-2540 Grenchen
Switzerland

Tel. +41 32 655 82 82
Fax +41 32 655 82 83
sales@microcrystal.com
www.microcrystal.com