

Datasheet

Industrial SD Card

SD 3.0 series

- SD 3.0 interface
- Power fail Management
- Redundant firmware
- Flexible ECC engine
- Dynamic Data refresh
- Customizable



Introduction

Innodisk industrial SD card 3.0 series are specifically designed for industrial PC and embedded applications. The 3.0 series SD card has latest firmware architecture and Flash algorithms, including superior wear leveling, read disturb management, and power fail management ensuring highest reliability and endurance.

Innodisk industrial SD card 3.0 series provide wide range capacities from 128MB to 32GB within SLC NAND Flash, and 4GB to 64GB within MLC NAND Flash, and fully compliant to SD3.0, and SD2.0 specifications.

With its low power consumption and features above, Innodisk industrial SD card 3.0 series can be applied on industrial automation, SBC (single-board computer), medical equipment, infotainment, and mobile application.

Industrial SD Card

SD 3.0 series

Contact us for more information about the Industrial SD Card SD 3.0.

Innodisk is a service-driven provider of industrial embedded flash storage products and technologies, with a focus on the cloud computing, industrial/embedded, and aerospace and defense industries.

Headquarters (Taiwan)

5F., No. 237, Sec. 1, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

Tel: +886-2-77033000
Email: sales@innodisk.com

Branch Offices:

USA
usasales@innodisk.com
+1-510-770-9421

Europe
eusales@innodisk.com
+31-40-3045-400

Japan
jpsales@innodisk.com
+81-45-594-7581


China
sales_cn@innodisk.com
+86-755-21673689

www.innodisk.com

© 2017 Innodisk Corporation.
All right reserved. Specifications are subject to change without prior notice.

20170308

Diagram

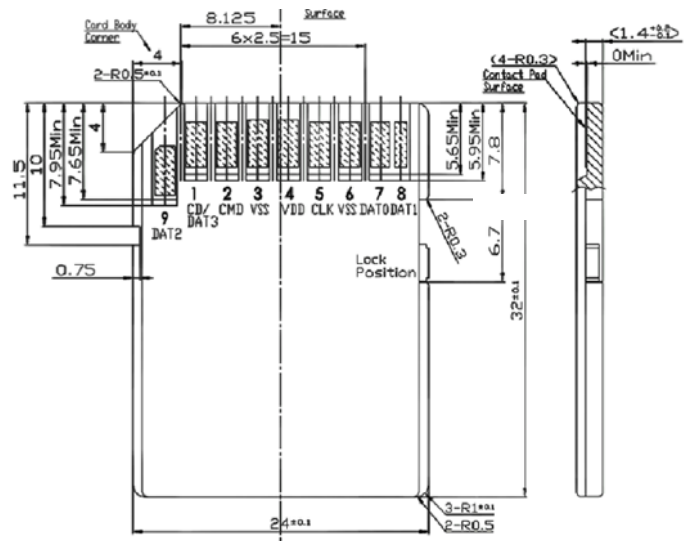

Tolerance: ± 0.15

Specifications

Interface	SD 3.0
Flash Type	iSLC
Capacity	8GB~64GB
Max. Channels	1
Sequential R/W (MB/sec, max.)	61/36 (ST), 45/31(WT)
Max. Power Consumption	0.25W (3.3V x 77mA)
Thermal Sensor	-
Extended DRAM buffer	-
H/W Write Protect	√
ATA Security	-
S.M.A.R.T.	-
Dimension (WxLxH)	24 X 32.0 X 2.1 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours

Ordering Information

Operation Temp.	8GB	16GB	32GB	64GB
Standard Grade (-20°C ~ +85°C)	DHSDC-08GY81BC3SC	DHSDC-16GY81BC3SC	DHSDC-32GY81BC3SC	DHSDC-64GY81BC3SC
Industrial Grade (-40°C ~ +85°C)	DHSDC-08GY81BW3SC	DHSDC-16GY81BW3SC	DHSDC-32GY81BW3SC	DHSDC-64GY81BW3SC